

AD-A037 199

WHARTON SCHOOL OF FINANCE AND COMMERCE PHILADELPHIA P--ETC F/6 9/2
WAND DEMONSTRATION. (U)

JUN 76 R GERRITSEN, H L MORGAN
76-06-01

N00014-75-C-0462
NL

UNCLASSIFIED

1 of 1
AD
A037199



END

DATE
FILMED
4-77

ADA037199

12
P.S.

WAND Demonstration

Rob Gerritsen and Howard L. Morgan

76-06-01

Department of Decision Sciences
Wharton School
University of Pennsylvania
Philadelphia, Pennsylvania

Presented at the SIGMOD Conference,
June 2-4, 1976, Washington, D.C.

DDDC
APR 18 1977
RECEIVED

COPY AVAILABLE TO DDC DOES NOT
PERMIT FULLY LEGIBLE PRODUCTION

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER 14 76-06-01 ✓	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
6. TITLE (and Subtitle) WAND Demonstration.		5. TYPE OF REPORT & PERIOD COVERED Final rept.
7. AUTHOR(s) Rob/Gerritsen Howard L./Morgan		6. PERFORMING ORG. REPORT NUMBER 76-06-01
9. PERFORMING ORGANIZATION NAME AND ADDRESS Decision Sciences Department University of PA/Wharton School Philadelphia, PA 19104		8. CONTRACT OR GRANT NUMBER(s) NO00014-75-C-0462
11. CONTROLLING OFFICE NAME AND ADDRESS Office of Naval Research Information Systems Arlington, Virginia 22217		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Technical report
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 11 Jun 76 12 15p.		12. REPORT DATE 6/76
		13. NUMBER OF PAGES 15
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Unlimited		
<div style="border: 1px solid black; padding: 5px; display: inline-block;"> DISTRIBUTION STATEMENT A Approved for public release; Distribution Unlimited </div>		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Demonstration Plex structures Network Structures DBTG DBMS		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) A demonstration of the online interactive user interface in the WAND system. Various features are demonstrated including an interactive data manipulation language, a bootstrapping HELP facility, and schema browsing commands. WAND is a plex DBMS fashioned after the CODASYL database task group (DBTG) specifications.		

The WAND (Wharton Alerting Network Database) system is a limited implementation (on the DEC10) of the CODASYL Data Base Task Group April 71 Report (DBTG). The principal differences are that WAND does not support or is limited with respect to:

1. Sub-schemas.
2. Multiple areas.
3. Privacy locks (only for entire database).
4. Set occurrence selection (only through current of set).
5. Pointer arrays.
6. Sorted sets.

The Data Definition Language (DDL) is exactly as specified in the DBTG report, as is the COBOL Data Manipulation Language (DML). In addition, WAND supports a Fortran DML and an interactive DML. The interactive DML is provided by a program called DBLOOK, which is the subject of this demonstration.

DBLOOK provides:

1. Interactive DML (to navigate the database).
2. Interactive access to the schema (to provide a map for the database navigator).
3. HELP (to explain itself and the DML).
4. Graphing and printing routines (to prepare data for human consumption).


With these features, DBLOOK is useful to the:

1. Data Base Administrator who might want to probe the data for suspected errors or other conditions warranting his attention.
2. To the programmer to build a test database or to debug a navigational procedure.
3. To the student who is learning DML.

WAND Bibliography

1. Buneman, O. Peter, and Howard Lee Morgan, "Alerting in Database Systems, Concepts and Techniques," Decision Sciences Working Paper 75-12-02, December 1975.
2. Cortes, Ricardo, "A Simplified Alerting System for WAND," draft.
3. Gerritsen, Rob, Ricardo Cortes, Jim Ribeiro, and Ruth Zowader, "WAND User's Guide," Decision Sciences Working Paper 76-01-03, April 15, 1976.
4. Gerritsen, Rob, and Howard L. Morgan, "Dynamic Restructuring of Data Bases with Generation Data Structures," Decision Sciences Working Paper 75-12-02, December, 1975.
5. Gerritsen, Rob, Howard L. Morgan, and Michael D. Zisman, "On Some Metrics for Data Bases or What is a Very Large Data Base," Decision Sciences Working Paper 76-04-08, April 1976.
6. Gerritsen, Rob, "A Structured DBTG Tutorial (Summary)," Decision Sciences Working Paper 75-03-01, March 1975.
7. Gerritsen, Rob, "Improved Program Structures: Data Management," Decision Sciences Working Paper 76-02-05, February 1976.
8. Zisman, Michael D., "Wand User's Guide Addendum," Decision Sciences Working Paper 76-05-08, May 21, 1976.

ACCESSION for	
NTIS	White Section <input checked="" type="checkbox"/>
DIC	Buff Section <input type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
Dist. AVAIL. and/or SPECIAL	
A	

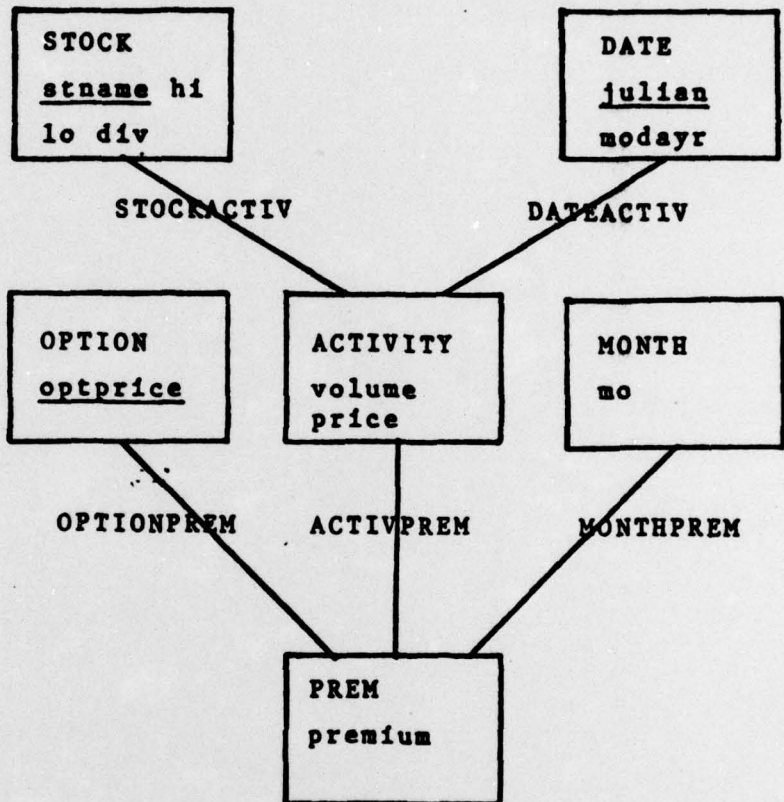

Demonstration database for WAND (stock options).

SCHEMA NAME IS CBOE DATABASE SIZE IS 39 PAGES.

RECORD NAME IS STOCK LOCATION MODE IS CALC USING STNAME
DUPLICATES NOT ALLOWED
STNAME TYPE IS CHARACTER 10
HI TYPE IS REAL
LO TYPE IS REAL
DIV TYPE IS REAL.

RECORD NAME IS OPTION LOCATION MODE IS CALC USING OPTPRICE
DUPLICATES NOT ALLOWED
OPTPRICE TYPE IS FIXED.

RECORD NAME IS PREM LOCATION MODE IS VIA OPTIONPREM
PREMIUM TYPE IS REAL.

RECORD NAME IS MONTH LOCATION MODE IS CALC USING MO
DUPLICATES NOT ALLOWED
MO TYPE IS CHARACTER 5.

RECORD NAME IS ACTIVITY LOCATION MODE IS VIA STOCKACTIV
VOLUME TYPE IS FIXED
PRICE TYPE IS REAL.

RECORD NAME IS DATE LOCATION MODE IS CALC USING JULIAN
DUPLICATES NOT ALLOWED
JULIAN TYPE IS FIXED
MODAYR TYPE IS CHARACTER 10.

SET NAME IS OPTIONPREM MODE IS CHAIN LINKED TO PRIOR ORDER IS LAST
OWNER IS OPTION MEMBER IS PREM LINKED TO OWNER.

SET NAME IS MONTHPREM MODE IS CHAIN LINKED TO PRIOR ORDER IS LAST
OWNER IS MONTH MEMBER IS PREM LINKED TO OWNER.

SET NAME IS ACTIVPREM MODE IS CHAIN LINKED TO PRIOR ORDER IS LAST
OWNER IS ACTIVITY MEMBER IS PREM LINKED TO OWNER.

SET NAME IS STOCKACTIV MODE IS CHAIN LINKED TO PRIOR ORDER IS LAST
OWNER IS STOCK MEMBER IS ACTIVITY LINKED TO OWNER.

SET NAME IS DATEACTIV MODE IS CHAIN LINKED TO PRIOR ORDER IS NEXT
OWNER IS DATE MEMBER IS ACTIVITY LINKED TO OWNER.

DDL for WAND demonstration database (CBOE -Chicago Board Options
Exchange).

*x dblook

Welcome to DBLOOK and WAND. Type HELP for info.

* @demo.fil

@ HELP

TO GET A LIST OF VALID COMMANDS TYPE 'COMMAND'.

TYPE 'EXIT' TO TERMINATE EXECUTION.

IF YOU WANT INFORMATION ABOUT A SPECIFIC COMMAND TYPE

'HELP <COMMAND>' AS IN 'HELP FINDO'.

COMMANDS MUST BE CONTAINED ON A SINGLE LINE, HOWEVER TWO OR MORE COMMANDS MAY BE ENTERED IF THEY ARE SEPARATED BY A SEMICOLON.

@

@ command

COMMANDS ARE (FOLLOWED BY THEIR LEGAL ABBREVIATION):

@	@	COMMAND	CO	CURRNT	CU	DBCLOS	DBC	DBOPEN	UBO
DELETE	DE	DISPLAY	DI	DO	DO	ELSE	EL	ERRSTA	ER
EXIT	EX	FINDAP	FAP	FINDC	FC	FINDO	FD	FINDO	FO
FINDPO	FPO	GET	GE	GRAPH	GR	HELP	H	IF	IF
ITEMS	IT	MODIFY	M	OD	O	PLOT	P	RECORDS	REC

REPEAT	REP	SETCUR	SETC	SETS	SETS	STATUS	STA	STORE	STO
TO	T								

<NAME>, OR <ITEM>=.

<NAME> IS ANY SET, RECORD OR ITEM NAME AND THE SYSTEM WILL DISPLAY STRUCTURAL INFORMATION ABOUT THE NAMED ENTITY.

<ITEM>= PERMITS ASSIGNMENT OF VALUES TO ITEMS.

IN THE SYNTAX OF THESE COMMANDS <SETN>, <RECN>, AND <ITMN>

ARE GENERIC TERMS FOR SET NAME, RECORD NAME AND ITEM NAME.

WHEREVER SUCH A NAME IS REQUIRED A VALUE OF 0 (ZERO) WILL

INDICATE A REFERENCE TO THE MOST RECENTLY NAMED OF THE SAME TYPE.

@

@ help status

STATUS or STA

Displays the STATUS of DBLOOK.

In GET mode, a record is directly moved to working storage following a FIND.

In NOGET mode a GET must be explicitly executed to set the data.

PROMPT mode will cause DBLOOK to ask for needed data values on STORE or FINDC.

The values of other DBLOOK parameters are displayed, see reference manual

for a complete explanation. STATUS can be changed with the TO command.

EXAMPLE: STATUS ,

@

@ help to

TO <STATUS VAR> <VALUE> or T <STATUS VAR> <VALUE>.

This causes the DBLOOK STATUS to be changed.

If <STATUS VAR> is a mode such as GET, PROMPT, or DISPLAY, then <VALUE> is not necessary.

PROMPT and GET modes can be altered, the characters that function as QUOTE,

SEMICOLON, ASTERISK, USER DELIMITER, and ASSIGNMENT can be changed,

the default repeat limit can be changed, and display formats can be altered.

EXAMPLE: TO PROMPT;TO ASTERISK ;

@


```

@      to comment /
@      /we have changed comment char to /.
@
@      status
GET
PROMPT
DISPLAY
NOLABEL
QUOTE /
SEMIC ;
ASTERISK *
REPEAT#      10
USER !
ASSIGN =
ATSIGN @
COMMENT /
XSIZE      60
YSIZE      20
FIXFMT     1X,I10,
REALFMT    1X,F8.3,
@
@
@      help dbopen
DBOPEN     <SCHEMA> <PASSW> <MODE> or DBO <SCHEMA> <PASSW> <MODE>.
<SCHEMA> is the schema name, <PASSW> is the password for the
privacy lock, and <MODE> is 0 to read or 1 to update the database.

```

EXAMPLE: DBOPEN CBOE 0 1

```

@
@
@      /now open for update:
@      dbopen cboe 0 1
@
@      / and we can get some information out of the schema:
@
@      records
STOCK      OPTION      PREM      MONTH      ACTIVITY      DATE
@
@      sets
OPTIONPREM STOCKACTIV MONTHPREM  ACTIVPREM  DATEACTIV
@
@      items
STNAME     HI      LO      DIV      OPTPRICE      PREMIUM      MO
VOLUME     PRICE     JULIAN  MODAYR
@

```

```

@ / we can also find out information about particular items by typing +
r names:
@
@ premium
CONTAINED IN PREM RECORD
TYPE IS REAL.'
@
@ prem
RECORD NAME IS PREM
LOCATION MODE IS VIA OPTIONPREM
CONTAINS THE FOLLOWING ITEMS:
PREMIUM
MEMBER OF OPTIONPREM
MEMBER OF MONTHPREM
MEMBER OF ACTIVPREM
@
@ activprem
SET NAME IS ACTIVPREM MODE IS CHAIN
LINKED TO PRIOR
ORDER IS LAST
OWNER IS ACTIVITY
MEMBER IS PREM LINKED TO OWNER.

@
@ activity
RECORD NAME IS ACTIVITY
LOCATION MODE IS VIA STOCKACTIV
CONTAINS THE FOLLOWING ITEMS:
VOLUME PRICE
MEMBER OF STOCKACTIV
OWNER OF ACTIVPREM
MEMBER OF DATEACTIV
@
@ stockactiv
SET NAME IS STOCKACTIV MODE IS CHAIN
LINKED TO PRIOR
ORDER IS LAST
OWNER IS STOCK
MEMBER IS ACTIVITY LINKED TO OWNER.
@
@ / now we are going to do some operations on data:
@ / after help, we list all stocks on which we have information:
@
@ help findap
FINDAP <POSITN> 0 <RECN> or FAP <POSITN> 0 <RECN> .
Permits positional find sequentially within the database.
<POSITN> may be FIRST, LAST, NEXT, PRIOR or an integer.
If <RECN> is 0, then any record type may be found relative to the current of
run-unit; otherwise a record of the named type is found relative to the
current of that type.

EXAMPLE: FINDAP NEXT 0 EMPLOYEE
@

```

```

@      stock;finda first 0 stock
RECORD NAME IS STOCK
      LOCATION MODE IS CALC USING STNAME      DUPLICATES ARE NOT ALLOWED
CONTAINS THE FOLLOWING ITEMS:

```

```

STNAME      HI      LO      DIV
OWNER OF STOCKACTIV
IRM          264.500  223.375  7.000

```

```

@
@      finda next 0 stock;rep 100
HONWLL      56.125  32.750  1.400
N SEMI      55.375  39.000  0.250
SYNTEX      36.250  28.625  0.400
XEROX       68.375  50.375  1.000
C DATA     26.750  17.625  0.000
TEX IN      124.000  93.125  1.000
POLAR       41.875  31.250  0.320
ERRSTA =    307
ERRSTA RESET TO 0.

```

```

@
@
@      / the repeat was terminated by DBLOOK when ERRSTA became non-zero.
@      / since DBLOOK has reacted to the change in ERRSTA it resets it to zero.
@
@
@      / next we generate a report about a specific stock (SYNTEX),
@      / but first we will use help to explain the commands we are about to use.

```

```

@
@      help findc
FINDC      <RECN> <POSITN> or FC      <RECN> <POSITN> .
Finds <RECN> using a calculated key.
POSITN is 'FIRST' or 'NEXT' which finds next duplicate.
FIRST is assumed if POSITN is not specified.
Assign value to CALC key with <ITEM>= command.
In PROMPT mode, DBLOOK will ask for a value for the key to be entered.

```

```

EXAMPLE: FINDC DEPT NEXT

```

```

@
@      help findpo
FINDPO     <POSITN> <SETN> <RECN> .
or FPO     <POSITN> <SETN> <RECN> .
<POSITN> must have 'FIRST', 'LAST', 'NEXT', 'PRIOR',
or 'N' as value. ('N' is a signed ASCII number).

```

```

EXAMPLE: FINDPO FIRST WORKS EMPLOYEE

```

```

@

```



```
@      help findo
FINDO   <SETN> or FO   <SETN> .
Finds owner of current occurrence of SETN.
```

EXAMPLE: FINDO WORKS

```
@
@      help display
DISPLAY <ITMN>/<RECN> ... or DI   <ITMN>/<RECN> ... .
This command will display the current values of any combination
of items or records.
```

EXAMPLE: DISPLAY DEPMGR EMPLOYEE DEPTNO

```
@
@      findo stock
STNAME  @      . SYNTEX
SYNTEX   36.250  28.625   0.400
@
@      / since we will explicitly tell DRLOOK which items to display,
@      / we will turn off the automatic display feature.
@      to nodisplay
@
@      / on the next line we ask for all date, price, volume information
@
@      findo next stockactiv activity;findo dateactiv;display modayr price;r
```

```
100
MAY 11, 76   28.375
MAY 12, 76   28.625
MAY 13, 76   28.625
MAY 14, 76   28.000
MAY 17, 76   27.750
MAY 18, 76   27.625
MAY 19, 76   27.250
MAY 20, 76   26.750
ERRSTA =    307
ERRSTA =    307
MAY 20, 76   26.750
ERRSTA RESET TO 0.
@
@
```

```

@
*      fc stock
STNAME *      XEROX
*      @JULFF.Plt
@      to comment /
@
@      / finally a more complex query, that has been pre-stored in a file.
@      / in this query we will plot on a graph the stock price and the
@      / premium for JULY options in XEROX.
@
@      help @

```

```

W      <FILE-NAME> or @      <FILE-NAME>.
Causes DBLOOK to read all commands from the named file to its end.
The default extent is .DAT. To read a file which has no extent,
include a period after the file name.

```

EXAMPLE: @CFILE

```

@
@      help plot
PLOT      <ITMN> <ITMN> <CHAR> or P      <ITMN> <ITMN> <CHAR> ,
First item name value is X-value and second item name value is Y-value
of location where CHARACTER is plotted,
or second item name is height of bar for a histogram.
If CHAR is omitted an asterisk (*) is plotted.
Up to 500 points (200 bars) may be plotted on a single graph. To get a print
of the graph, use GRAPH!! command.

```

EXAMPLE: FPO NEXT PRICES STOCK;PLOT PRICE VOL +;REPEAT 50;GRAPH
YES? YOU HAVE INTERRUPTED ME.
TYPE C TO LET ME CONTINUE OR S TO STOP ME: C

```

@
@      help graph
GRAPH      or GR
Causes a graph or histogram of up to 500 plotted points to be generated.
The graphing program will prompt the user prior to generating the graph.
The user can control the use of loss on either axis, and the range of each axis
The physical size of the graph is determined by XSIZE and YSIZE (part of STATUS)
The PLOT command delivers coordinates of the points that are to be plotted.

```

EXAMPLE: FPO NEXT PRICES STOCK;PLOT PRICE VOL;REPEAT 50;GRAPH

```

@
@
@      fc stock
STNAME      @      XEROX
@
@
@
@      fpo first stockactiv activity;fpo dateactiv
@

```


@ fso next activrem premifo monthpremiif mo = JUL & Julian premiumifif
ifso next stockactiv activityifo dateactiviree

ERRSTA = 307
ERRSTA = 307
ERRSTA RESET TO 0.
ERRSTA = 307
ERRSTA = 307
ERRSTA RESET TO 0.
ERRSTA = 307
ERRSTA = 307
ERRSTA RESET TO 0.
ERRSTA = 307
ERRSTA = 307
ERRSTA RESET TO 0.
ERRSTA = 307
ERRSTA = 307
ERRSTA RESET TO 0.
ERRSTA = 307
ERRSTA = 307
ERRSTA RESET TO 0.
ERRSTA = 307
ERRSTA = 307
ERRSTA RESET TO 0.
ERRSTA = 307
ERRSTA = 307
ERRSTA RESET TO 0.
ERRSTA = 307
ERRSTA = 307
ERRSTA RESET TO 0.
ERRSTA = 307
ERRSTA = 307
ERRSTA RESET TO 0.

@

@ graph

GRAPH OR HISTOGRAM (G H): G
X VALUES RANGE FROM 132.0000 TO 141.0000
Y VALUES RANGE FROM .0625000 TO 9.875000
LOG SCALE AXES (X Y XY):
LIMITS (X Y XY): XY
X-AXIS (LOW HI): 131 141
Y-AXIS (LOW HI): 0 10

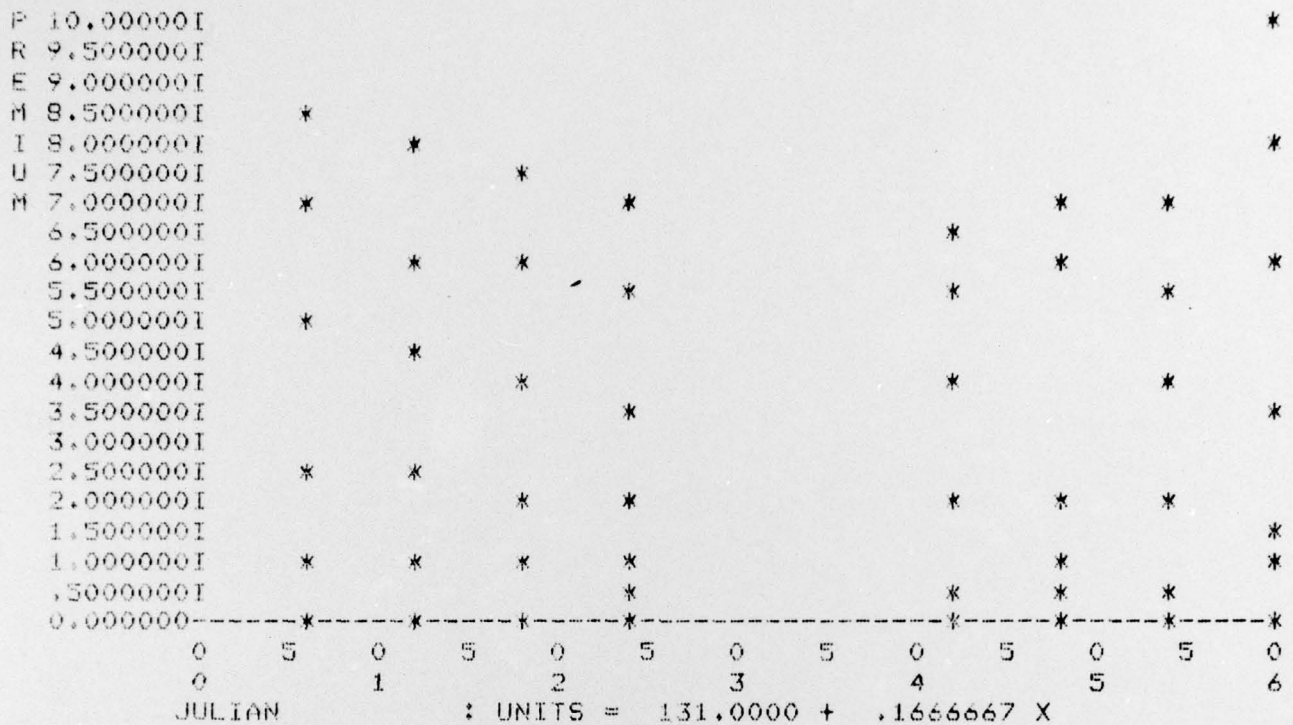


TYPE C TO CONTINUE WITH SAME DATA:

```

@
@ / and we also plot the price activity
@
@ fo stockactiv
@
@ fpo next stockactiv activity;fo dateactiv;plot Julian price;res
ERRSTA = 307
ERRSTA = 307
ERRSTA RESET TO 0.
@
@ graph
GRAPH OR HISTOGRAM (G H): G
X VALUES RANGE FROM 132.0000 TO 141.0000
Y VALUES RANGE FROM 49.87500 TO 54.00000
LOG SCALE AXES (X Y XY):
LIMITS (X Y XY): XY
X-AXIS (LOW HI): 131 141
Y-AXIS (LOW HI): 45 55
  
```

P 55.00000I
 R 54.50000I
 I 54.00000I
 C 53.50000I
 E 53.00000I
 52.50000I
 52.00000I
 51.50000I
 51.00000I
 50.50000I
 50.00000I
 49.50000I
 49.00000I
 48.50000I
 48.00000I
 47.50000I
 47.00000I
 46.50000I
 46.00000I
 45.50000I
 45.00000I

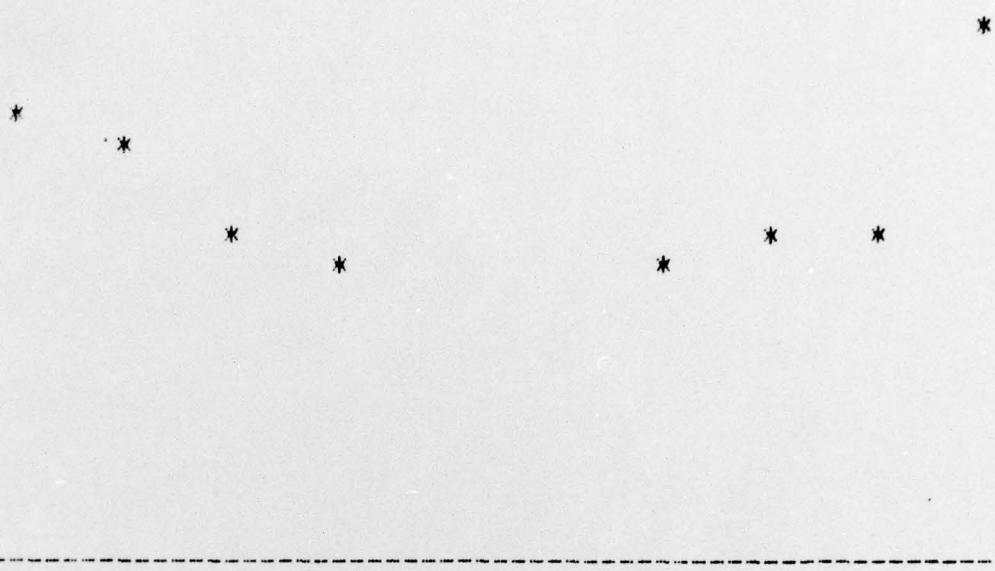

 0 5 0 5 0 5 0 5 0 5 0 5 0
 0 1 2 3 4 5 6
 JULIAN : UNITS = 131.0000 + ,1666667 X

TYPE C TO CONTINUE WITH SAME DATA:

@
 * exit
 ERRSTA = 0

END OF EXECUTION
 CPU TIME: 20.45 ELAPSED TIME: 13:19.77
 EXIT

DISTRIBUTION LIST

Department of the Navy - Office of Naval Research

Data Base Management Systems Project

Defense Documentation Center (12)
Cameron Station
Alexandria, VA 22314

Office of Naval Research (6)
Arlington, VA 22217

Office of Naval Research
Branch Office, Chicago
536 South Clark Street
Chicago, Illinois 60605

New York Area Office
715 Broadway - 5th Floor
New York, NY 10003

Dr. A. L. Slafkosky
Scientific Advisor
Commandant of the Marine Corps
(Code RD-1)
Washington, DC 20380

Office of Naval Research
Code 458
Arlington, VA 22217

Mr. E. H. Gleissner
Naval Ship Research and
Development Center
Computation & Mathematics Dept.
Bethesda, MD 20084

Mr. Kim B. Thompson
Technical Director
Information Systems Division
(OP-911G)
Office of Chief of Naval Operations
Washington, DC 20350

Professor Omar Wing
Columbia University
Dept of Electrical Engineering
and Computer Science
New York, NY 10027

Office of Naval Research (2)
Information Systems Program
Code 437
Arlington, VA 22217

Office of Naval Research
Code 102IP Branch Office, Boston
495 Summer Street
Boston, MA 02210

Office of Naval Research
Branch Office, Pasadena
1030 East Green Street
Pasadena, CA 91106

Naval Research Laboratory (6)
Technical Information Division
Code 2627
Washington, DC 20375

Office of Naval Research
Code 455
Arlington, VA 22217

Naval Electronics Laboratory Center
Advanced Software Technology Division
Code 5200
San Diego, CA 92152

Captain Grace M. Hopper
NAICOM/MIS Planning Branch
(OP-916D)
Office of Chief of Naval Operations
Washington, DC 20350

Bureau of Library and
Information Science Research
Rutgers - The State University
189 College Avenue
New Brunswick, NJ 08903
Attn: Dr. Henry Voos