


WRDC-TR-90-8007
Volume VI
Part 7


AD-A248 909

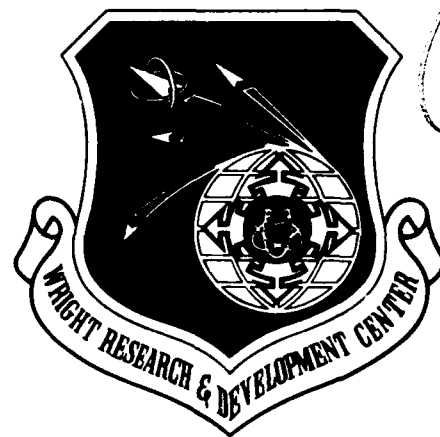

INTEGRATED INFORMATION SUPPORT SYSTEM (IISS)
Volume VI - Network Transaction Manager Subsystem
Part 7 - Network Transaction Manager (NTM) Services Product
Specification

S. Barker

Control Data Corporation
Integration Technology Services
2970 Presidential Drive
Fairborn, OH 45324-6209

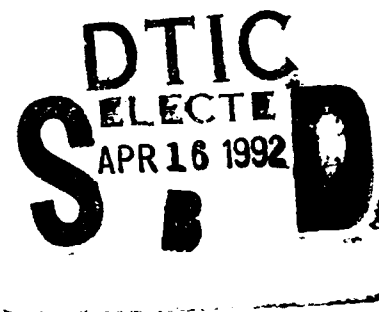

September 1990

Final Report for Period 1 April 1987 - 31 December 1990

Approved for Public Release; Distribution is Unlimited

92 4 14 048

92-09611



MANUFACTURING TECHNOLOGY DIRECTORATE
WRIGHT RESEARCH AND DEVELOPMENT CENTER
AIR FORCE SYSTEMS COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433-6533


**Best
Available
Copy**

NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever, regardless whether or not the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data. It should not, therefore, be construed or implied by any person, persons, or organization that the Government is licensing or conveying any rights or permission to manufacture, use, or market any patented invention that may in any way be related thereto.

This technical report has been reviewed and is approved for publication.

This report is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nations

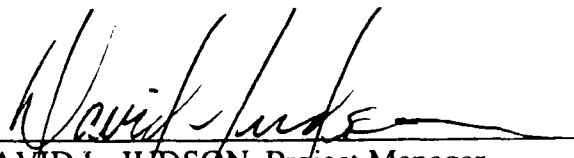
DAVID L. JUDSON, Project Manager
WRDC/MTI
Wright-Patterson AFB, OH 45433-6533

25 July 91
DATE

FOR THE COMMANDER:


BRUCE A. RASMUSSEN, Chief
WRDC/MTI
Wright-Patterson AFB, OH 45433-6533

25 July 91
DATE

If your address has changed, if you wish to be removed from our mailing list, or if the addressee is no longer employed by your organization please notify WRDC/MTI, Wright-Patterson Air Force Base, OH 45433-6533 to help us maintain a current mailing list.

Copies of this report should not be returned unless return is required by security considerations, contractual obligations, or notice on a specific document.

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION Unclassified		1b. RESTRICTIVE MARKINGS None	
2a. SECURITY CLASSIFICATION AUTHORITY		3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for Public Release: Distribution is Unlimited.	
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE			
4. PERFORMING ORGANIZATION REPORT NUMBER(S) PS 620342300		5. MONITORING ORGANIZATION REPORT NUMBER(S) WRDC-TR- 90-8007 Vol. VI, Part 7	
6a. NAME OF PERFORMING ORGANIZATION Control Data Corporation; Integration Technology Services	6b. OFFICE SYMBOL (if applicable)	7a. NAME OF MONITORING ORGANIZATION WRDC/MTI	
6c. ADDRESS (City, State, and ZIP Code) 2970 Presidential Drive Fairborn, OH 45324-6209		7b. ADDRESS (City, State, and ZIP Code) WPAFB, OH 45433-6533	
8a. NAME OF FUNDING/SPONSORING ORGANIZATION Wright Research and Development Center, Air Force Systems Command, USAF	8b. OFFICE SYMBOL (if applicable) WRDC/MTI	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUM. F33600-87-C-0464	
8c. ADDRESS (City, State, and ZIP Code) Wright-Patterson AFB, Ohio 45433-6533		10. SOURCE OF FUNDING NOS.	
11. TITLE (Include Security Classification) See Block 19		PROGRAM ELEMENT NO. 78011F	PROJECT NO. 595600
		TASK NO. F95600	WORK UNIT NO. 20950607
12. PERSONAL AUTHOR(S) Structural Dynamics Research Corporation: Barker, S., et al.			
13a. TYPE OF REPORT Final Report	13b. TIME COVERED 4/1/87 - 12/31/90	14. DATE OF REPORT (Yr., Mo., Day) 1990 September 30	15. PAGE COUNT 182
16. SUPPLEMENTARY NOTATION WRDC/MTI Project Priority 6203			
17. COSATI CODES		18. SUBJECT TERMS (Continue on reverse if necessary and identify block no.)	
FIELD	GROUP	SUB GR.	
1308	0905		
19. ABSTRACT (Continue on reverse if necessary and identify block number) This specification establishes the 'as built' design of the Network Transaction Manager subsystem. Block 11 (Cont) - INTEGRATED INFORMATION SUPPORT SYSTEM (IISS) Vol VI - Network Transaction Manager Subsystem Part 7 - Network Transaction Manager (NTM) Services Product Specification			
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT UNCLASSIFIED/UNLIMITED x SAME AS RPT. DTIC USERS		21. ABSTRACT SECURITY CLASSIFICATION Unclassified	
22a. NAME OF RESPONSIBLE INDIVIDUAL David L. Judson		22b. TELEPHONE NO. (Include Area Code) (513) 255-7371	22c. OFFICE SYMBOL WRDC/MTI

FOREWORD

This technical report covers work performed under Air Force Contract F33600-87-C-0464, DAPro Project. This contract is sponsored by the Manufacturing Technology Directorate, Air Force Systems Command, Wright-Patterson Air Force Base, Ohio. It was administered under the technical direction of Mr. Bruce A. Rasmussen, Branch Chief, Integration Technology Division, Manufacturing Technology Directorate, through Mr. David L. Judson, Project Manager. The Prime Contractor was Integration Technology Services, Software Programs Division, of the Control Data Corporation, Dayton, Ohio, under the direction of Mr. W. A. Osborne. The DAPro Project Manager for Control Data Corporation was Mr. Jimmy P. Maxwell.

The DAPro project was created to continue the development, test, and demonstration of the Integrated Information Support System (IISS). The IISS technology work comprises enhancements to IISS software and the establishment and operation of IISS test bed hardware and communications for developers and users.

The following list names the Control Data Corporation subcontractors and their contributing activities:

SUBCONTRACTOR

ROLE

Control Data Corporation	Responsible for the overall Common Data Model design development and implementation, IISS integration and test, and technology transfer of IISS.
D. Appleton Company	Responsible for providing software information services for the Common Data Model and IDEF1X integration methodology.
CNTEK	Responsible for defining and testing a representative integrated system base in Artificial Intelligence techniques to establish fitness for use.
Simpact Corporation	Responsible for Communication development.

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

PS C20-011
30 September 1977

Structural Dynamics
Research Corporation

Responsible for User Interfaces,
Virtual Terminal Interface, and Network
Transaction Manager design,
development, implementation, and
support.

Arizona State University

Responsible for test bed operations
and support.

TABLE OF CONTENTS

	<u>Page</u>
SECTION 1.0 SCOPE	1-1
1.1 Identification	1-1
1.2 Functional Summary	1-1
SECTION 2.0 DOCUMENTS	2-1
2.1 Reference Documents	2-1
2.2 Terms and Abbreviations	2-2
SECTION 3.0 REQUIREMENTS	3-1
3.1 Structural Descriptions	3-1
3.2 Functional Flow Description	3-1
3.3 Interfaces	3-2
3.4 Program Interrupts	3-2
3.5 Timing and Sequence Description	3-2
3.6 Special Control Features	3-2
3.7 Storage Allocation	3-2
3.7.1 Data Base Definition	3-2
3.7.1.1 File Description	3-2
3.7.1.2 Table Description	3-2
3.7.1.3 Item and Constant Description	3-2
3.7.2 CPC Relationship	3-3
3.8 Object Code Creation	3-3
3.9 Adaption Data	3-3
3.10 Detail Design Description	3-4
3.10.1 Main Program List	3-4
3.10.2 Module List	3-7
3.10.3 External Routines List	3-11
3.10.4 Include File List	3-13
3.10.5 Where Include File Used List	3-15
3.10.6 Where External Routine Used List	3-26
3.10.7 Main Program Parts List	3-35
3.10.8 Module Documentation	3-60
3.10.9 Include File Descriptions	3-115
3.10.10 Hierarchy Chart	3-135
3.11 Program Listings Comments	3-174
4.0 QUALITY ASSURANCE PROVISIONS	4-1
4.1 Introduction and Definitions	4-1
4.2 Computer Programming Test and Evaluation	4-1

SECTION 1

SCOPE

1.1 Identification

This specification establishes the 'as built' design of the Software Services component of the Network Transaction Manager Subsystem.

1.2 Functional Summary

The Network Transaction Manager (NTM) Subsystem provides the control and support services to application processes that are grouped together logically in clusters called Application Process Cluster (APCs). These application processes communicate with one another by sending messages via the NTM. The NTM delivers these messages to the destination application processes while also providing other services for the APs such as message pairing, AP initiation, and message queuing.

SECTION 2

DOCUMENTS

2.1 Reference Documents

The following pertinent reference materials are available at the ICAM Program Office.

1. Interim Reports
2. Life Cycle Documents
 - (a) ITR620150002U Project Scope
 - (b) PMP620150000 Master Plan and Schedule
 - (c) SAD620150000 State-of-the-Art Review
 - (d) SRD620140000 System Requirements Document
 - (e) SDS620140000 System Design Specifications
 - (f) DS6201420000 Development Specification - Network Transaction Manager Subsystem

The following reference materials are available from Digital Equipment Corporation.

- (a) VAX/VMS I/O User's Guide (Volume 1), Order No. AA-M540B-TE
- (b) VAX/VMS I/O User's Guide (Volume 2), Order No. AA-M541B-TE
- (c) VAX COBOL Language Reference Manual, Order No. AA-H631C-TE
- (d) VAX-11 FORTRAN Language Reference Manual, OrderNo. AA-D034C-TE

Other reference materials are as follows.

- (a) International Organization for Standardization, Open Systems Interconnection, Information Processing Systems - Basic Reference Model, TC 97/16 N 719
- (b) International Organization for Standardization, Open Systems Interconnection, Draft, Connection-Oriented Transport Service Definition TC 97/16 N 860
- (c) International Organization for Standardization, Open Systems Interconnection, Draft, Connection-Oriented Transport Protocol Specification Version 1.2, TC 97/16 N 861

- (d) International Organization for Standardization, Open Systems Interconnection, Draft, Connection-Oriented Session Protocol Definition TC 97/16 N 856
- (e) National Bureau of Standards, Specification of the Transport Protocol, Volume 2: Basic Class Protocol, Draft Report, September 1981, Report No. ICST/HLNP-81-12
- (f) National Bureau of Standards, Specification of the Transport Protocol, Volume 3: Extended Class Protocol, Draft Report, September 1981, Report No. ICST/HLNP-81-13
- (g) National Bureau of Standards, Specification of the Transport Protocol, Volume 4: Network Interfaces, Draft Report, September 1981, Report No. ICST/HLNP-81-14

2.2 Terms And Abbreviations

1. Interhost Communication Primitives (IHC's) - A set of routines used by the NTM to interface to the operating system or to other operating systems which have an NTM running. They are always system dependent.
2. Interprocess Communication Primitives (IPC's) - A set of routines used to communicate between two processes on the same computer. They are always system dependent.

SECTION 3

REQUIREMENTS

3.1 Structural Descriptions

The NTM Services Modules are the routines that are bound with new IISS APs to provide the management of the AP's communication with the IISS.

3.2 Functional Flow Description

The NTM Services can be grouped according to their basic function in the following way:

The NTM Communication Initiation Routines:

- INICOM (used by the COMM APs for initiation)
- INITAL (used for initiation by all IISS APs except COMM and the UI)
- INITEX (used by the UI AP for initiation)
- LOGON (used by the UI to send user logon information to the NTM)

The NTM Communication Routines:

- CHGROL (used by the UI to tell the NTM about a user's role change)
- CHKMSG (used as a check to determine whether a message has arrived for the AP)
- GDACK (used to acknowledge guaranteed delivery messages)
- GDSEN (used to send guaranteed delivery messages)
- ISEND (used to send a message that will specifically cause the initiation of a new instance of an IISS AP)
- NSEND (used to send message to other IISS APs)
- QSEND (used by Queue-Server APs to send messages back to the AP whose message was just received)
- RCV (used to receive any messages that may have been sent by other IISS APs)
- IGERR (used to send an error message to both the user of this AP and the NTM Monitor)
- TSTMOD (used by the UI to signal message filtering needs)

NTM Status Services

- GETUSR (used to get user information, original source, and original logical channel)
- WTHST (used to determine host name where requested AP resides)

NTM Termination Services

- LOGOFF (used by the UI to inform the NTM of a user logoff)
- TRMNAT (used by all IISS APs to terminate their communication connection to the NTM)
- TRMNAX (used by the COMM APs to terminate their communication connection to the NTM)

3.3 Interfaces

The Network Transaction Manager maintains communications with any other process through mailboxes. The mailboxes are managed by the Interprocess Communication Primitives (IPC's).

Communications with the remote computer is accomplished through the Communication sub-system process which will be running when there are other hosts to communicate with.

3.4 Program Interrupts

Many NTM Services are interrupt driven with interrupts coming either from the IPC's on behalf of an NTM MPU. Waiting for these interrupts is performed by one of the IPC wait primitives. If a response must be received within a particular time interval, the IPC's associated with timing are used along with one of the wait's.

3.5 Timing and Sequence Description

The NTM does not depend on any particular timing sequences.

3.6 Special Control Features

The Newtork Transaction Manager Subsystem does not include any special control features as defined in the ICAM Documentation Standards manual.

3.7 Storage Allocation

3.7.1 Data Base Definition

3.7.1.1 File Description

All file handling is done by the Message Processing Units and not by the NTM Services themselves.

3.7.1.2 Table Description

There are no tables which are used by all of the NTM Services. Information regarding the individual APs is stored and handled by the Message Processing Units and not by the NTM Services themselves.

3.7.1.3 Item and Constant Description

Described in the DS.

3.7.2 CPC Relationship

3.8 Object Code Creation

The generic portion of NTM is written in COBOL and 'C'. This has been successfully compiled on a VAX 11/780 under VMS, an IBM 3084 under MVS, and a Honeywell Level 6 under Mod 400.

The minimum computer hardware and software required to create and run NTM in the IISS environment is documented in the Installation Guide for IISS on the VAX and in the Installation Guide for IISS on the IBM.

3.9 Adaption Data

The command procedures to create IISS AP executables such that they contain the NTM Services are specific to each computer and can be found under Software Configuration Management.

3.10 Detail Design Description

The upcoming program details were derived from all modules that were selected when the following Documentation Group(s) was chosen:

NTMSERV

3.10.1 Main Program List

The following is a list of all "Main Programs" which are modules that are not called by any other module being documented here. These modules are either program entry points or, if they are hooked into another set of programs via subroutine calls, they are the points the external programs can call and therefore enter through. To differentiate between the two types of entry points, look at the individual Module Documentation (section 3.10.8) and look at Module Type for each of the Main Program modules listed. Note whether the routine is a Program, Subroutine, or Function. If it is a Program, it is truly a main program entry point. If not, then it is merely called by other programs not being documented here.

NTM/SERV Main Program List

Module Name -----	Purpose -----
ASCTIM	CALLED BY MPU'S TO GET THE SYSTEM TIME AS AN ASCII STRING.
CHGROL2	CHANGE THE ROLE UNDER WHICH A USER LOGGED ON.
CHKMSG2	TO CHECK FOR MESSAGES FROM OTHER APS IN THE IISS .
ERRAPI	PURPOSE NOT KNOWN - ACTIVE CODE.
FILGEN	
GDACK2	SENDS GD ACK MESSAGE TO LOCAL MPU.
GDSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.
GETTIM	GET THE SYSTEM TIME AS A BINARY STRING.
GETUSR2	RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND USER NAME.
INICOM2	INITIALIZE AP'S CONNECTION TO THE IISS.
INITAL2	INITIALIZE AP'S CONNECTION TO THE TIV MPU.
INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
INSTNC2	GET THE SYSGEN INSTANCE NUMBER.
ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
LOGOFF2	SENDS LOGOFF MESSAGE TO THE MONITOR AP.
LOGON2	SENDS LOGON MESSAGE TO THE MONITOR AP.

NTM/SERV Main Program List

Module Name -----	Purpose -----
MBXLG2	PURPOSE NOT KNOWN - ACTIVE CODE.
MBXLOG	PURPOSE NOT KNOWN - ACTIVE CODE.
QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
RCLE	REMOTE COMPILE AND LINK EXPERT DRIVER
SIGABT2	SIGNAL THE MPU TO ABORT A CHILD AP
SIGERR	CALL SIGERR2
SNDRCLE	REMOTE COMPILE AND LINK EXPERT CALLING SERVICE
TRMNAX	CALL TRMNAX2
TSTMOD	CALL COBOL ROUTINE TSTMOD2
WTHST	CALL WTHST2

3.10.2 Module List

The following is a list of all the modules being documented here along with their purpose. Each module has a unique name, no matter what language it was written in.

NTM/SERV Module List

Module Name -----	Purpose -----
ASCTIM	CALLED BY MPU'S TO GET THE SYSTEM TIME AS AN ASCII STRING.
CHGROL2	CHANGE THE ROLE UNDER WHICH A USER LOGGED ON.
CHKMSG2	TO CHECK FOR MESSAGES FROM OTHER APS IN THE IISS .
ERRAPI	PURPOSE NOT KNOWN - ACTIVE CODE.
FILGEN	
GDACK2	SENDS GD ACK MESSAGE TO LOCAL MPU.
GDSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.
GETTIM	GET THE SYSTEM TIME AS A BINARY STRING.
GETUSR2	RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND USER NAME.
INICOM2	INITIALIZE AP'S CONNECTION TO THE IISS.
INITAL2	INITIALIZE AP'S CONNECTION TO THE T1V MPU.
INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
INSTNC2	GET THE SYSGEN INSTANCE NUMBER.
ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
LOGOFF2	SENDS LOGOFF MESSAGE TO THE MONITOR AP.
LOGON2	SENDS LOGON MESSAGE TO THE MONITOR AP.

NTM/SERV Module List

Module Name -----	Purpose -----
MBXLG2	PURPOSE NOT KNOWN - ACTIVE CODE.
MBXLOG	PURPOSE NOT KNOWN - ACTIVE CODE.
NSEND2	SEND MESSAGE TO AN AP IN THE IISS.
POSTCOM	
PRECOM	
QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
RCLE	REMOTE COMPILE AND LINK EXPERT DRIVER
RCLFILE	
RCV2	RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
SIGABT2	SIGNAL THE MPU TO ABORT A CHILD AP
SIGERR	CALL SIGERR2
SIGERR2	SENDS AN ERROR MESSAGE TO MONITOR AND TO ORIGINAL SOURCE.
SNDRCLE	REMOTE COMPILE AND LINK EXPERT CALLING SERVICE
TRMNAT	CALL TRMNAT2
TRMNAT2	TERMINATE AN AP'S CONNECTION TO THE IISS.
TRMNAX	CALL TRMNAX2
TRMNAX2	TERMINATE COMM'S CONNECTION TO THE IISS.
TSTMOD	CALL COBOL ROUTINE TSTMOD2
TSTMOD2	SET/RESET THE TEST-MODE-FLAG.

NTM/SERV Module List

Module Name -----	Purpose -----
WHTHST	CALL WHTHST2
WHTHST2	RETURNS THE NAME OF THE HOST ON WHICH AN AP RESIDES.

3.10.3 External Routines List

The following is a list of all routines or functions not documented here that are called by modules that are documented here. The first caller, in alphabetical order, is listed as well. The specification in which any module is documented may be found in the Module Documentation Index (Document Number CM 620100001). See section 3.10.6 for a list of the modules that call each of these external routines.

NTM/SERV External Routines List

Module Name -----	First User -----
APACCT	WTHST
CNLTIM	ISEND2
CRTMBX	INICOM2
DELMBX	TRMNAT2
ENDRUN	TRMNAX2
ERRPRO	SIGERR2
GETMSG	RCV2
GETNAM	INITEX2
INITAL	RCLE
ISEND	SNDRCLE
LOCKEF	INITAL2
NSEND	FILGEN
RCV	RCLE
RCVMSG	RCV2
RELEVB	INITIL2
SETTIM	INITEX2
SNDMSG	TRMNAT2
SYS\$ASCTIM	ASCTIM
SYS\$CREPRC	RCLE
SYS\$GETJPI	RCLE
SYS\$GETTIM	GETTIM
WAIT01	INITIL2
WAIT02	QSEND2

3.10.4 Include File List

The following is a list of all include files called in by modules being documented here. Each include file has a unique name regardless of the language being used. The purpose of each include file is listed as well. A more complete description of each include file is given in section 3.10.9. The purpose listed is the one that is in the source code of the include file.

A purpose of "**** PURPOSE NOT FOUND BY STRIPPER ****" indicates that a purpose statement was not written into the include file itself. The most common reason for this is that the include file comes from system libraries that were not developed by the project, such as 'C' libraries that are provided with the 'C' compiler.

See section 3.10.6 for a set of lists which show all the modules which call in each of these include files.

NTM/SERV Include File List

File Name -----	Purpose -----
ADMSGH	THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
ALMSGH	SPACES OR 0.
APCNM1	APIS GLOBAL NAME DATA.
APCNM2	SERVICE CODES FOR THE NTM SERVICE ROUTINES.
APIEBV	**** PURPOSE NOT FOUND BY STRIPPER ****
APIINI	FOR INITIATION PURPOSES
APILCL	THE APIS COMMON LOCAL DATA.
APINME	**** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI	**** PURPOSE NOT FOUND BY STRIPPER ****
COMAPC	PROCESS ERROR INCLUDE FILE
ERRPRO	PROCESS ERROR INCLUDE FILE
INICMD	PROCESS ERROR INCLUDE FILE
MSGSTR	PURPOSE
RETSTR	THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
SRVCD2	THAT CALL NSEND AND RCV
SRVCD5	SERVICE CODES FOR THE NTM SERVICE ROUTINES.
SRVRET	AS THE RETURN GIVEN A TABLE-FULL ERROR
TSTMDE	SPACES OR 0.

3.10.5 Where Include File Used List

The following lists each include file from 3.10.4 and all the modules documented in this specification which include them. The purpose of each module is listed as well.

NTM/SERV Where-include-file-used List

Include File -----	Module Name -----	Module Purpose -----
ADMSGH	TRMNAT2 TRMNAX2	TERMINATE AN AP'S CONNECTION TO THE IISS. TERMINATE COMM'S CONNECTION TO THE IISS.
ALMSGH	INICOM2 INITAL2 INITEX2 INITIL2	INITIALIZE AP'S CONNECTION TO THE IISS. INITIALIZE AP'S CONNECTION TO THE T1V MPU. INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU. INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
APCNM1	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
APCNM2	INITAL2 INITIL2	INITIALIZE AP'S CONNECTION TO THE T1V MPU. INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
APIEBB	CHGROL2 CHKMSG2 GDACK2	CHANGE THE ROLE UNDER WHICH A USER LOGGED ON. TO CHECK FOR MESSAGES FROM OTHER APS IN THE IISS . SENDS GD ACK MESSAGE TO LOCAL MPU.

NTM/SERV Where-include-file-used List

Include File -----	Module Name -----	Module Purpose -----
	GDSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.
	GETUSR2	RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND USER NAME.
	INITAL2	INITIALIZE AP'S CONNECTION TO THE TIV MPU.
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
	ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
	LOGOFF2	SENDS LOGOFF MESSAGE TO THE MONITOR AP.
	LOGON2	SENDS LOGON MESSAGE TO THE MONITOR AP.
	NSEND2	SEND MESSAGE TO AN AP IN THE IISS.
	QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
	RCLE	REMOTE COMPILE AND LINK EXPERT DRIVER
	RCV2	RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
	SIGABT2	SIGNAL THE MPU TO ABORT A CHILD AP
	SIGERR	CALL SIGERR2
	SIGERR2	SENDS AN ERROR MESSAGE TO MONITOR AND TO ORIGINAL SOURCE.
	TRMNAT	CALL TRMNAT2
	TRMNAT2	TERMINATE AN AP'S CONNECTION TO THE IISS.
	TSTMOD	CALL COBOL ROUTINE TSTMOD2
	WTHST	CALL WTHST2
	WTHST2	RETURNS THE NAME OF THE HOST ON WHICH AN AP RESIDES.
APIINI	INITAL2	INITIALIZE AP'S CONNECTION TO THE TIV MPU.
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.

NTM/SERV Where-include-file-used List

Include File -----	Module Name -----	Module Purpose -----
--------------------------	-------------------------	----------------------------

APILCL

CHKMSG2	TO CHECK FOR MESSAGES FROM OTHER APS IN THE IISS .
GDACK2	SENDS GD ACK MESSAGE TO LOCAL MPU.
GSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.
INITAL2	INITIALIZE AP'S CONNECTION TO THE T1V MPU.
INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
NSEND2	SEND MESSAGE TO AN AP IN THE IISS.
QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
RCLE	REMOTE COMPILE AND LINK EXPERT DRIVER
RCV2	RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
SIGABT2	SIGNAL THE MPU TO ABORT A CHILD AP
SIGERR2	SENDS AN ERROR MESSAGE TO MONITOR AND TO ORIGINAL SOURCE.
TRMNAT2	TERMINATE AN AP'S CONNECTION TO THE IISS.
TRMNAX2	TERMINATE COMM'S CONNECTION TO THE IISS.

APINME

CHGROL2	CHANGE THE ROLE UNDER WHICH A USER LOGGED ON.
CHKMSG2	TO CHECK FOR MESSAGES FROM OTHER APS IN THE IISS .
GDACK2	SENDS GD ACK MESSAGE TO LOCAL MPU.
GSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.

NTM/SERV Where-include-file-used List

Include File -----	Module Name -----	Module Purpose -----
	GETUSR2	RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND USER NAME.
	INITAL2	INITIALIZE AP'S CONNECTION TO THE T1V MPU.
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
	ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
	LOGOFF2	SENDS LOGOFF MESSAGE TO THE MONITOR AP.
	LOGON2	SENDS LOGON MESSAGE TO THE MONITOR AP.
	NSEND2	SEND MESSAGE TO AN AP IN THE IISS.
	QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
	RCV2	RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
	SIGABT2	SIGNAL THE MPU TO ABORT A CHILD AP
	SIGERR	CALL SIGERR2
	SIGERR2	SENDS AN ERROR MESSAGE TO MONITOR AND TO ORIGINAL SOURCE.
	TRMNAT	CALL TRMNAT2
	TRMNAT2	TERMINATE AN AP'S CONNECTION TO THE IISS.
	WHTHST	CALL WHTHST2
	WHTHST2	RETURNS THE NAME OF THE HOST ON WHICH AN AP RESIDES.
BUFAPI	CHGROL2	CHANGE THE ROLE UNDER WHICH A USER LOGGED ON.
	CHKMSG2	TO CHECK FOR MESSAGES FROM OTHER APS IN THE IISS .
	GDACK2	SENDS GD ACK MESSAGE TO LOCAL MPU.
	GDSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.
	GETUSR2	RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND USER NAME.
	INITAL2	INITIALIZE AP'S CONNECTION TO THE T1V MPU.

NTM/SERV Where-include-file-used List

Include File -----	Module Name -----	Module Purpose -----
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
	ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
	LOGOFF2	SENDS LOGOFF MESSAGE TO THE MONITOR AP.
	LOGON2	SENDS LOGON MESSAGE TO THE MONITOR AP.
	NSEND2	SEND MESSAGE TO AN AP IN THE IISS.
	QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
	RCV2	RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
	SIGABT2	SIGNAL THE MPU TO ABORT A CHILD AP
	SIGERR	CALL SIGERR2
	SIGERR2	SENDS AN ERROR MESSAGE TO MONITOR AND TO ORIGINAL SOURCE.
	WHTHST	CALL WHTHST2
	WHTHST2	RETURNS THE NAME OF THE HOST ON WHICH AN AP RESIDES.
COMAPC	TRMNAX2	TERMINATE COMM'S CONNECTION TO THE IISS.
ERRPRO	CHGROL2	CHANGE THE ROLE UNDER WHICH A USER LOGGED ON.
	CHKMSG2	TO CHECK FOR MESSAGES FROM OTHER APS IN THE IISS .
	FILGEN	
	GDACK2	SENDS GD ACK MESSAGE TO LOCAL MPU.
	GDSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.

NTM/SERV Where-include-file-used List

Include File -----	Module Name -----	Module Purpose -----
	GETUSR2	RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND USER NAME.
	INICOM2	INITIALIZE AP'S CONNECTION TO THE IISS.
	INITAL2	INITIALIZE AP'S CONNECTION TO THE TIV MPU.
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
	ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
	LOGOFF2	SENDS LOGOFF MESSAGE TO THE MONITOR AP.
	LOGON2	SENDS LOGON MESSAGE TO THE MONITOR AP.
	NSEND2	SEND MESSAGE TO AN AP IN THE IISS.
	QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
	RCLE	REMOTE COMPILE AND LINK EXPERT DRIVER
	RCV2	RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
	SIGABT2	SIGNAL THE MPU TO ABORT A CHILD AP
	SIGERR2	SENDS AN ERROR MESSAGE TO MONITOR AND TO ORIGINAL SOURCE.
	TRMNAT2	TERMINATE AN AP'S CONNECTION TO THE IISS.
	TRMNAX2	TERMINATE COMM'S CONNECTION TO THE IISS.
	WTHST2	RETURNS THE NAME OF THE HOST ON WHICH AN AP RESIDES.
INICMD	INICOM2	INITIALIZE AP'S CONNECTION TO THE IISS.
MSGSTR	CHKMSG2	TO CHECK FOR MESSAGES FROM OTHER APS IN THE IISS .
	GDSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.

NTM/SERV Where-include-file-used List

Include File -----	Module Name -----	Module Purpose -----
	ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
	NSEND2	SEND MESSAGE TO AN AP IN THE IISS.
	QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
	RCV2	RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
RETSTR		
	CHGROL2	CHANGE THE ROLE UNDER WHICH A USER LOGGED ON.
	CHKMSG2	TO CHECK FOR MESSAGES FROM OTHER APS IN THE IISS .
	GDACK2	SENDS GD ACK MESSAGE TO LOCAL MPU.
	GDSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.
	GETUSR2	RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND USER NAME.
	INITAL2	INITIALIZE AP'S CONNECTION TO THE T1V MPU.
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP's CONNECTION TO AN AP SELECTED MPU.
	ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
	LOGOFF2	SENDS LOGOFF MESSAGE TO THE MONITOR AP.
	LOGON2	SENDS LOGON MESSAGE TO THE MONITOR AP.
	NSEND2	SEND MESSAGE TO AN AP IN THE IISS.
	QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
	RCLE	REMOTE COMPILE AND LINK EXPERT DRIVER
	RCV2	RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
	SIGABT2	SIGNAL THE MPU TO ABORT A CHILD AP
	SIGERR2	SENDS AN ERROR MESSAGE TO MONITOR AND TO ORIGINAL SOURCE.
	TRMNAT2	TERMINATE AN AP'S CONNECTION TO THE IISS.

NTM/SERV Where-include-file-used List

Include File -----	Module Name -----	Module Purpose -----
	TRMNAX2 WTHST2	TERMINATE COMM'S CONNECTION TO THE IISS. RETURNS THE NAME OF THE HOST ON WHICH AN AP RESIDES.
SRVCD2	CHGROL2 GDACK2 GETUSR2 LOGOFF2 LOGON2 SIGABT2 SIGERR2 TSTMOD2 WTHST2	CHANGE THE ROLE UNDER WHICH A USER LOGGED ON. SENDS GD ACK MESSAGE TO LOCAL MPU. RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND USER NAME. SENDS LOGOFF MESSAGE TO THE MONITOR AP. SENDS LOGON MESSAGE TO THE MONITOR AP. SIGNAL THE MPU TO ABORT A CHILD AP SENDS AN ERROR MESSAGE TO MONITOR AND TO ORIGINAL SOURCE. SET/RESET THE TEST-MODE-FLAG. RETURNS THE NAME OF THE HOST ON WHICH AN AP RESIDES.
SRVCD5	CHKMSG2 GDSEND2 INITAL2 INITEX2 INITIL2 ISEND2 NSEND2 QSEND2	TO CHECK FOR MESSAGES FROM OTHER APS IN THE IISS . SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING. INITIALIZE AP'S CONNECTION TO THE TIV MPU. INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU. INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU. SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP. SEND MESSAGE TO AN AP IN THE IISS. SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.

NTM/SERV Where-include-file-used List

Include File -----	Module Name -----	Module Purpose -----
	RCV2	RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
	TRMNAT2	TERMINATE AN AP'S CONNECTION TO THE IISS.
	TRMNAX2	TERMINATE COMM'S CONNECTION TO THE IISS.
SRVRET	CHGROL2	CHANGE THE ROLE UNDER WHICH A USER LOGGED ON.
	FILGEN	
	GDACK2	SENDS GD ACK MESSAGE TO LOCAL MPU.
	GETUSR2	RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND USER NAME.
	LOGOFF2	SENDS LOGOFF MESSAGE TO THE MONITOR AP.
	LOGON2	SENDS LOGON MESSAGE TO THE MONITOR AP.
	RCLE	REMOTE COMPILE AND LINK EXPERT DRIVER
	SIGABT2	SIGNAL THE MPU TO ABORT A CHILD AP
	SIGERR2	SENDS AN ERROR MESSAGE TO MONITOR AND TO ORIGINAL SOURCE.
	SNDRCLE	REMOTE COMPILE AND LINK EXPERT CALLING SERVICE
	WTHST2	RETURNS THE NAME OF THE HOST ON WHICH AN AP RESIDES.
TSTMDE	CHKMSG2	TO CHECK FOR MESSAGES FROM OTHER APS IN THE IISS .
	GETUSR2	RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND USER NAME.
	INITAL2	INITIALIZE AP'S CONNECTION TO THE T1V MPU.
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP's CONNECTION TO AN AP SELECTED MPU.
	LOGON2	SENDS LOGON MESSAGE TO THE MONITOR AP.

NTM/SERV Where-include-file-used List

Include File -----	Module Name -----	Module Purpose -----
	RCV2	RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
	SIGABT2	SIGNAL THE MPU TO ABORT A CHILD AP
	TSTMOD2	SET/RESET THE TEST-MODE-FLAG.
	WTHST2	RETURNS THE NAME OF THE HOST ON WHICH AN AP RESIDES.

3.10.6 Where External Routine Used List

The following lists each external function or routine listed in 3.10.3 and all the documented modules which call it. The purpose of each module is listed as well.

NTM/SERV Where-external-routine-used List

System Module -----	Module Name -----	Module Purpose -----
APACCT	SIGERR	CALL SIGERR2
	TRMNAT	CALL TRMNAT2
	TRMNAX	CALL TRMNAX2
	TSTMOD	CALL COBOL ROUTINE TSTMOD2
	WTHST	CALL WTHST2
CNLTIM	GDSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.
	ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
	NSEND2	SEND MESSAGE TO AN AP IN THE IISS.
	QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
CRTMBX	INICOM2	INITIALIZE AP'S CONNECTION TO THE IISS.
	INITAL2	INITIALIZE AP'S CONNECTION TO THE TIV MPU.
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP's CONNECTION TO AN AP SELECTED MPU.
DELMBX	INITAL2	INITIALIZE AP'S CONNECTION TO THE TIV MPU.
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP's CONNECTION TO AN AP SELECTED MPU.
	TRMNAT2	TERMINATE AN AP'S CONNECTION TO THE IISS.

NTM/SERV Where-external-routine-used List

System Module -----	Module Name -----	Module Purpose -----
ENDRUN	TRMNAT2 TRMNAX2	TERMINATE AN AP'S CONNECTION TO THE IISS. TERMINATE COMM'S CONNECTION TO THE IISS.
ERRPRO	CHGROL2 CHKMSG2 FILGEN GDACK2 GDSEND2 GETUSR2 INICOM2 INITAL2 INITEX2 INITIL2 ISEND2 LOGOFF2 LOGON2 NSEND2 QSEND2 RCLE RCV2 SIGABT2 SIGERR2 TRMNAT2 TRMNAX2 WHTHST2	CHANGE THE ROLE UNDER WHICH A USER LOGGED ON. TO CHECK FOR MESSAGES FROM OTHER APS IN THE IISS . SENDS GD ACK MESSAGE TO LOCAL MPU. SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING. RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND USER NAME. INITIALIZE AP'S CONNECTION TO THE IISS. INITIALIZE AP'S CONNECTION TO THE TIV MPU. INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU. INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU. SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP. SENDS LOGOFF MESSAGE TO THE MONITOR AP. SENDS LOGON MESSAGE TO THE MONITOR AP. SEND MESSAGE TO AN AP IN THE IISS. SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S. REMOTE COMPILE AND LINK EXPERT DRIVER RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS . SIGNAL THE MPU TO ABORT A CHILD AP SENDS AN ERROR MESSAGE TO MONITOR AND TO ORIGINAL SOURCE. TERMINATE AN AP'S CONNECTION TO THE IISS. TERMINATE COMM'S CONNECTION TO THE IISS. RETURNS THE NAME OF THE HOST ON WHICH AN AP RESIDES.

NTM/SERV Where-external-routine-used List

System Module -----	Module Name -----	Module Purpose -----
GETMSG	CHKMSG2	TO CHECK FOR MESSAGES FROM OTHER AFS IN THE IISS .
	GDSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.
	INICOM2	INITIALIZE AP'S CONNECTION TO THE IISS.
	INITAL2	INITIALIZE AP'S CONNECTION TO THE TIV MPU.
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
	ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
	NSEND2	SEND MESSAGE TO AN AP IN THE IISS.
	QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
	RCV2	RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
GETNAM	INICOM2	INITIALIZE AP'S CONNECTION TO THE IISS.
	INITAL2	INITIALIZE AP'S CONNECTION TO THE TIV MPU.
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
	MBXLOG	PURPOSE NOT KNOWN - ACTIVE CODE.
	TRMNAX2	TERMINATE COMM'S CONNECTION TO THE IISS.
INITAL	RCLE	REMOTE COMPILE AND LINK EXPERT DRIVER

NTM/SERV Where-external-routine-used List

System Module -----	Module Name -----	Module Purpose -----
ISEND	SNDRCLE	REMOTE COMPILE AND LINK EXPERT CALLING SERVICE
LOCKEF	INITAL2	INITIALIZE AP'S CONNECTION TO THE T1V MPU.
NSEND	FILGEN RCLE	REMOTE COMPILE AND LINK EXPERT DRIVER
RCV	FILGEN RCLE	REMOTE COMPILE AND LINK EXPERT DRIVER
RCVMSG	CHKMSG2	TO CHECK FOR MESSAGES FROM OTHER APS IN THE IISS .
	GDSSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.
	INICOM2	INITIALIZE AP'S CONNECTION TO THE IISS.
	INITAL2	INITIALIZE AP'S CONNECTION TO THE T1V MPU.
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
	ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
	NSEND2	SEND MESSAGE TO AN AP IN THE IISS.

NTM/SERV Where-external-routine-used List

System Module -----	Module Name -----	Module Purpose -----
	QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
	RCV2	RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
RELEVB	GDSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.
	INITAL2	INITIALIZE AP'S CONNECTION TO THE TIV MPU.
	INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
	ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
	NSEND2	SEND MESSAGE TO AN AP IN THE IISS.
	QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
	TRMNAT2	TERMINATE AN AP'S CONNECTION TO THE IISS.
	TRMNAX2	TERMINATE COMM'S CONNECTION TO THE IISS.
SETTIM	GDSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.
	INICOM2	INITIALIZE AP'S CONNECTION TO THE IISS.
	INITAL2	INITIALIZE AP'S CONNECTION TO THE TIV MPU.
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
	ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
	NSEND2	SEND MESSAGE TO AN AP IN THE IISS.
	QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
	RCLE	REMOTE COMPILE AND LINK EXPERT DRIVER
	TRMNAT2	TERMINATE AN AP'S CONNECTION TO THE IISS.
	TRMNAX2	TERMINATE COMM'S CONNECTION TO THE IISS.

NTM/SERV Where-external-routine-used List

System Module -----	Module Name -----	Module Purpose -----
SNDMSG	GDSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.
	INICOM2	INITIALIZE AP'S CONNECTION TO THE IISS.
	INITAL2	INITIALIZE AP'S CONNECTION TO THE T1V MPU.
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
	ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
	NSEND2	SEND MESSAGE TO AN AP IN THE IISS.
	QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
	TRMNAT2	TERMINATE AN AP'S CONNECTION TO THE IISS.
TRMNAX2	TERMINATE COMM'S CONNECTION TO THE IISS.	
SYS\$ASCTIM	ASCTIM	CALLED BY MPU'S TO GET THE SYSTEM TIME AS AN ASCII STRING.
SYS\$CREPRC	RCLE	REMOTE COMPILE AND LINK EXPERT DRIVER
SYS\$GETJPI	RCLE	REMOTE COMPILE AND LINK EXPERT DRIVER
SYS\$GETTIM		

NTM/SERV Where-external-routine-used List

System Module -----	Module Name -----	Module Purpose -----
	ASCTIM	CALLED BY MPU'S TO GET THE SYSTEM TIME AS AN ASCII STRING.
	GETTIM	GET THE SYSTEM TIME AS A BINARY STRING.
WAIT01	GDSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.
	INICOM2	INITIALIZE AP'S CONNECTION TO THE IISS.
	INITAL2	INITIALIZE AP'S CONNECTION TO THE T1V MPU.
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
	ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
	NSEND2	SEND MESSAGE TO AN AP IN THE IISS.
	QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
	RCLE	REMOTE COMPILE AND LINK EXPERT DRIVER
	RCV2	RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
	TRMNAT2	TERMINATE AN AP'S CONNECTION TO THE IISS.
	TRMNAX2	TERMINATE COMM'S CONNECTION TO THE IISS.
WAIT02	GDSEND2	SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.
	INICOM2	INITIALIZE AP'S CONNECTION TO THE IISS.
	INITAL2	INITIALIZE AP'S CONNECTION TO THE T1V MPU.
	INITEX2	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	INITIL2	INITIALIZE AN AP'S CONNECTION TO AN AP SELECTED MPU.
	ISEND2	SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
	NSEND2	SEND MESSAGE TO AN AP IN THE IISS.

NTM/SERV Where-external-routine-used List

System Module -----	Module Name -----	Module Purpose -----
	QSEND2	SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
	RCV2	RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .

3.10.7 Main Program Parts List

The following lists each Main Program listed in 3.10.1 and all the modules which are called either by that module itself or by any of the documented modules which it calls. It is possible for a non-main module to be listed more than once if it is called by multiple modules. The called modules, in this case known as program parts, are marked as to whether they are documented here. If so, the phrase "well-defined module" appears by the module name, if not it is an "external routine". The Purpose of the Main Program module is listed as well.

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
ASCTIM		Purpose-->CALLED BY MPU'S TO GET THE SYSTEM TIME AS AN ASCII STRING.
	SYS\$ASCTIM	External routine
	SYS\$GETTIM	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
CHGROL2		Purpose-->CHANGE THE ROLE UNDER WHICH A USER LOGGED ON.
	CNLTIM	External routine
	ERRPRO	External routine
	GETMSG	External routine
	NSEND2	Well-defined module
	RCVMSG	External routine
	RELEVB	External routine
	SETTIM	External routine
	SNDMSG	External routine
	WAIT01	External routine
	WAIT02	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
CHKMSG2		Purpose-->TO CHECK FOR MESSAGES FROM OTHER APS IN THE IISS .
	ERRPRO	External routine
	GETMSG	External routine
	RCVMSG	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
FILGEN		Purpose-->
	ERRPRO	External routine
	NSEND	External routine
	RCV	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
GDACK2		Purpose-->SENDS GD ACK MESSAGE TO LOCAL MPU.
	CNLTIM	External routine
	ERRPRO	External routine
	GETMSG	External routine
	NSEND2	Well-defined module
	RCVMSG	External routine
	RELEVB	External routine
	SETTIM	External routine
	SNDMSG	External routine
	WAIT01	External routine
	WAIT02	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
GDSEND2		Purpose-->SEND MESSAGES THAT REQUIRE GUARANTEED DELIVERY PROCESSING.
	CNLTIM	External routine
	ERRPRO	External routine
	GETMSG	External routine
	RCVMSG	External routine
	RELEVB	External routine
	SETTIM	External routine
	SNDMSG	External routine
	WAIT01	External routine
	WAIT02	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
GETTIM		Purpose-->GET THE SYSTEM TIME AS A BINARY STRING.
	SYS\$GETTIM	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
GETUSR2		Purpose-->RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND USER NAME.
	CNLTIM	External routine
	ERRPRO	External routine
	GETMSG	External routine
	NSEND2	Well-defined module
	RCV2	Well-defined module
	RCVMSG	External routine
	RELEVB	External routine
	SETTIM	External routine
	SNDMSG	External routine
	WAIT01	External routine
	WAIT02	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
INICOM2	Purpose-->	INITIALIZE AP'S CONNECTION TO THE IISS.
	CRTMBX	External routine
	ERRPRO	External routine
	GETMSG	External routine
	GETNAM	External routine
	RCVMSG	External routine
	SETTIM	External routine
	SNDMSG	External routine
	WAIT01	External routine
	WAIT02	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
INITAL2	Purpose-->INITIALIZE AP'S CONNECTION TO THE T1V MPU.	
	CRTMBX	External routine
	DELMBX	External routine
	ERRPRO	External routine
	GETMSG	External routine
	GETNAM	External routine
	LOCKEF	External routine
	RCVMSG	External routine
	RELEVB	External routine
	SETTIM	External routine
	SNDMSG	External routine
	WAIT01	External routine
	WAIT02	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
INITEX2	Purpose-->	INITIALIZE UI LIKE AP'S CONNECTION TO THE UIV MPU.
	CRTMBX	External routine
	DELMBX	External routine
	ERRPRO	External routine
	GETMSG	External routine
	GETNAM	External routine
	RCVMSG	External routine
	SETTIM	External routine
	SNDMSG	External routine
	WAIT01	External routine
	WAIT02	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
INITIL2	Purpose-->	INITIALIZE AN AP's CONNECTION TO AN AP SELECTED MPU.
	CRTMBX	External routine
	DELMBX	External routine
	ERRPRO	External routine
	GETMSG	External routine
	GETNAM	External routine
	RCVMSG	External routine
	RELEVB	External routine
	SETTIM	External routine
	SNDMSG	External routine
	WAIT01	External routine
	WAIT02	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
ISEND2		Purpose-->SEND MESSAGE THAT WILL CAUSE THE SPECIFIC INITIATION OF AN AP.
	CNLTIM	External routine
	ERRPRO	External routine
	GETMSG	External routine
	RCVMSG	External routine
	RELEVB	External routine
	SETTIM	External routine
	SNDMSG	External routine
	WAIT01	External routine
	WAIT02	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
LOGOFF2		Purpose-->SENDS LOGOFF MESSAGE TO THE MONITOR AP.
	CNLTIM	External routine
	ERRPRO	External routine
	GETMSG	External routine
	NSEND2	Well-defined module
	RCVMSG	External routine
	RELEVB	External routine
	SETTIM	External routine
	SNDMSG	External routine
	WAIT01	External routine
	WAIT02	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
LOGON2	Purpose-->	SENDS LOGON MESSAGE TO THE MONITOR AP.
	CNLTIM	External routine
	ERRPRO	External routine
	GETMSG	External routine
	NSEND2	Well-defined module
	RCV2	Well-defined module
	RCVMSG	External routine
	RELEVB	External routine
	SETTIM	External routine
	SNDMSG	External routine
	WAIT01	External routine
	WAIT02	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
MBXLOG	GETNAM	Purpose-->PURPOSE NOT KNOWN - ACTIVE CODE. External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
QSEND2		Purpose-->SEND MESSAGES TO OTHER APS IN THE IISS FROM QSERVER AP'S.
	CNLTIM	External routine
	ERRPRO	External routine
	GETMSG	External routine
	RCVMSG	External routine
	RELEVB	External routine
	SETTIM	External routine
	SNDMSG	External routine
	WAIT01	External routine
	WAIT02	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
RCLE	Purpose-->	REMOTE COMPILE AND LINK EXPERT
		DRIVER
	APACCT	External routine
	DELMBX	External routine
	ENDRUN	External routine
	ERRPRO	External routine
	INITAL	External routine
	NSEND	External routine
	POSTCOM	Well-defined module
	PRECOM	Well-defined module
	RCLFILE	Well-defined module
	RCV	External routine
	RELEVB	External routine
	SETTIM	External routine
	SNDMMSG	External routine
	SYSSCREPRC	External routine
	SYSSGETJPI	External routine
	TRMNAT	Well-defined module
	TRMNAT2	Well-defined module
	WAIT01	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
SIGABT2	Purpose-->	SIGNAL THE MPU TO ABORT A CHILD AP
	CNLTIM	External routine
	ERRPRO	External routine
	GETMSG	External routine
	NSEND2	Well-defined module
	RCVMSG	External routine
	RELEVB	External routine
	SETTIM	External routine
	SNDMSG	External routine
	WAIT01	External routine
	WAIT02	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
SIGERR		Purpose-->CALL SIGERR2
	APACCT	External routine
	CNLTIM	External routine
	ERRPRO	External routine
	GETMSG	External routine
	NSEND2	Well-defined module
	RCVMSG	External routine
	RELEVB	External routine
	SETTIM	External routine
	SIGERR2	Well-defined module
	SNDMSG	External routine
	WAIT01	External routine
	WAIT02	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
SNDRCLE		Purpose-->REMOTE COMPILE AND LINK EXPERT
		CALLING SERVICE
	ISEND	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
TRMNAX		Purpose-->CALL TRMNAX2
	APACCT	External routine
	ENDRUN	External routine
	ERRPRO	External routine
	GETNAM	External routine
	RELEVB	External routine
	SETTIM	External routine
	SNDMSG	External routine
	TRMNAX2	Well-defined module
	WAIT01	External routine

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
TSTMOD		Purpose-->CALL COBOL ROUTINE TSTMOD2
	APACCT	External routine
	TSTMOD2	Well-defined module

NTM/SERV Main Program Parts List

Main Pgm Name -----	Module Name -----	Module Type -----
WHTHST		Purpose-->CALL WHTHST2
	APACCT	External routine
	CNLTIM	External routine
	ERRPRO	External routine
	GETMSG	External routine
	NSEND2	Well-defined module
	RCV2	Well-defined module
	RCVMSG	External routine
	RELEVB	External routine
	SETTIM	External routine
	SNDMSG	External routine
	WAIT01	External routine
	WAIT02	External routine
	WHTHST2	Well-defined module

3.10.8 Module Documentation

The following documentation describes information which is specific to each individual module being documented in this specification as listed in section 3.10.2. It provides a compact way of getting information that would be otherwise buried within each module's source code.

The specific items in this module documentation have the following meanings:

NAME:	Name of program Module.
PURPOSE:	Purpose of Module as detailed in the source code.
LANGUAGE:	Programming language source code is written in. The choices are: VAX-11 FORTRAN C (I/S-1 Workbench 'C') VAX-11 COBOL
MODULE TYPE:	Whether a Program, Subroutine, or Function.
SOURCE FILE:	Name of Source File from file specification.
SOURCE FILE TYPE:	Source File Extension from file specification.
HOST:	Whether this is a host-dependent routine (VAX or IBM) or blank if host-independent.
SUBSYSTEM:	IISS sub-system this file resides in.
SUBDIRECTORY:	Sub-directory of that subsystem in which this file resides.
DOCUMENTATION GROUP:	Name of documentation group of which this source file is a member.
DESCRIPTION:	A description of the module as obtained from the source code.
ARGUMENTS:	The arguments with which this routine is called if it is a Subroutine or a Function.
INCLUDE FILES:	A list of all the files that are included into this module as well as their purposes.

ROUTINES CALLED: Subroutines or Functions, either documented or external, called by this module, if any.

CALLED DIRECTLY BY: The documented routines which call this module, if any.

USED IN MAIN PROGRAM(S): The documented Main Programs which contain this module in their parts list according to the list in section 3.10.7.

The Module Documentation is arranged alphabetically according to Module Name.

NTM/SERV Module Documentation

NAME: ASCTIM
PURPOSE: CALLED BY MPU'S TO GET THE SYSTEM TIME AS
AN ASCII STRING.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: ASCTIM
SOURCE FILE TYPE: .COB
HOST: VAX
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

- CALLS VMS SERVICES: SYS\$GETTIM

SYS\$ASCTIM

ARGUMENTS:

TIME-STRING = DSPLY [X(23)]
NTM-RETURN = DSPLY [X(5)]
SS-STATUS = DSPLY [S9(9)]

ROUTINES CALLED:

SYS\$GETTIM
SYS\$ASCTIM

NTM/SERV Module Documentation

NAME: CHGROL2
PURPOSE: CHANGE THE ROLE UNDER WHICH A USER LOGGED
ON.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: CHGROL2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

-

ARGUMENTS:

TERMINAL-ID = DSPLY [X(3)]
USER-NAME = DSPLY [X(8)]
ROLE-NAME = DSPLY [X(10)]
RTN-CODE = DSPLY [X(5)]
API-GLOBAL-NAME-SEC = RECRD
API-GLOBAL-BUFFER-SEC = RECRD
HOT-MBX-EVENT-BLK = DSPLY [X(2032)]
COLD-MBX-EVENT-BLK = DSPLY [X(2032)]
SEND-EVENT-BLK = DSPLY [X(2032)]
ACK-MBX-EVENT-BLK = DSPLY [X(2032)]
TIMER-EVENT-BLK = DSPLY [X(80)]

INCLUDE FILES:

SRVRET - AS THE RETURN GIVEN A TABLE-FULL ERROR
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
SRVCD2 - THAT CALL NSEND AND RCV
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEVB - **** PURPOSE NOT FOUND BY STRIPPER ****
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

NSEND2 - SEND MESSAGE TO AN AP IN THE IISS.
ERRPRO

NTM/SERV Module Documentation

NAME: CHKMSG2
PURPOSE: TO CHECK FOR MESSAGES FROM OTHER APS IN
THE IISS .
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: CHKMSG2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

-

ARGUMENTS:

LOGICAL-CHANNEL = DSPLY [X(3)]
MSG-SOURCE = DSPLY [X(10)]
ACCEPT-STATUS = DSPLY [X(5)]
API-GLOBAL-NAME-SEC = RECRD
API-GLOBAL-BUFFER-SEC = RECRD
HOT-MBX-EVENT-BLK = DSPLY [X(2032)]
COLD-MBX-EVENT-BLK = DSPLY [X(2032)]
SEND-EVENT-BLK = DSPLY [X(2032)]
ACK-MBX-EVENT-BLK = DSPLY [X(2032)]
TIMER-EVENT-BLK = DSPLY [X(80)]
TEST-MODE-FLAG = DSPLY [X]

INCLUDE FILES:

MSGSTR - PURPOSE
APILCL - THE APIS COMMON LOCAL DATA.
SRVCDS - SERVICE CODES FOR THE NTM SERVICE ROUTINES.
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEVB - **** PURPOSE NOT FOUND BY STRIPPER ****
TSTMDE - SPACES OR 0.
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

RCVMSG
GETMSG
ERRPRO

NTM/SERV Module Documentation

NAME: ERRAPI
PURPOSE: PURPOSE NOT KNOWN - ACTIVE CODE.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: ERRAPI
SOURCE FILE TYPE: .COB
HOST: VAX
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

-

ARGUMENTS:

CALL-NAME = DSPLY [X(6)]
ROUTINE-NAME = DSPLY [X(8)]
RET-CODE = DSPLY [X(5)]
SS-STATUS = DSPLY [S9(9)]

NTM/SERV Module Documentation

NAME: FILGEN
PURPOSE:
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: FILGEN
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

-
THE PURPOSE OF THIS ROUTINE IS TO ACT AS A
GENERALIZED INTERFACE TO THE FILE NAME
QUEUE SERVER.
mod for release 2.0 to return a ret-status
WILL ASK FOR AND RECEIVE A BLOCK OF 20 NAMES
AND HAND THEM OUT TO A CALLER 1 AT A TIME.
IF INUT-HOST NAME IS BLANK, THEN USE THE
CURRENT HOST AND PASS IT BACK TO THE CALLER.
COPY OF GENFIL RENAMED AS FILGEN FOR USE IN NTM.

ARGUMENTS:

FILE-HOST = DSPLY [XXX]

INCLUDE FILES:

SRVRET - AS THE RETURN GIVEN A TABLE-FULL ERROR
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

NSEND
RCV
ERRPRO

NTM/SERV Module Documentation

NAME: GDACK2
PURPOSE: SENDS GD ACK MESSAGE TO LOCAL MPU.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: GDACK2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

SENDS GD ACK MESSAGE TO LOCAL MPU. THIS INFORMS
THE MPU THAT THE AP HAS ACCEPTED THE GD MESSAGE.
-

ARGUMENTS:

MESSAGE-SERIAL-NUMBER = DSPLY [X(7)]
RETCODE = DSPLY [X(5)]
API-GLOBAL-NAME-SEC = RECRD
API-GLOBAL-BUFFER-SEC = RECRD
HOT-MBX-EVENT-BLK = DSPLY [X(2032)]
COLD-MBX-EVENT-BLK = DSPLY [X(2032)]
SEND-EVENT-BLK = DSPLY [X(2032)]
ACK-MBX-EVENT-BLK = DSPLY [X(2032)]
TIMER-EVENT-BLK = DSPLY [X(80)]

INCLUDE FILES:

SRVRET - AS THE RETURN GIVEN A TABLE-FULL ERROR
SRVCD2 - THAT CALL NSEND AND RCV
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
APILCL - THE APIS COMMON LOCAL DATA.
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEVB - **** PURPOSE NOT FOUND BY STRIPPER ****
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

NSEND2 - SEND MESSAGE TO AN AP IN THE TISS.
ERRPRO

NTM/SERV Module Documentation

NAME: GDSSEND2
PURPOSE: SEND MESSAGES THAT REQUIRE GUARANTEED
DELIVERY PROCESSING.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: GDSSEND2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

ARGUMENTS:

DSTINATION = DSPLY [X(10)]
LOGICAL-CHANNEL = DSPLY [X(3)]
TIMEOUT-VALUE = DSPLY [X(15)]
DATA-TYPE = DSPLY [X]
MESSAGE-TYPE = DSPLY [X(2)]
SEND-SIZE = DSPLY [9(5)]
USER-DATA = RECRD
ACCEPT-STATUS = DSPLY [X(5)]
MESSAGE-SERIAL-NUMBER = DSPLY [X(7)]
API-GLOBAL-NAME-SEC = RECRD
API-GLOBAL-BUFFER-SEC = RECRD
HOT-MBX-EVENT-BLK = DSPLY [X(2032)]
COLD-MBX-EVENT-BLK = DSPLY [X(2032)]
SEND-EVENT-BLK = DSPLY [X(2032)]
ACK-MBX-EVENT-BLK = DSPLY [X(2032)]
TIMER-EVENT-BLK = DSPLY [X(80)]

INCLUDE FILES:

MSGSTR - PURPOSE
APILCL - THE APIS COMMON LOCAL DATA.
SRVCDS - SERVICE CODES FOR THE NTM SERVICE ROUTINES.
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEVB - **** PURPOSE NOT FOUND BY STRIPPER ****
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

SNDMSG

PS 620342300
30 September 1990

SETTIM
WAIT01
RCVMSG
WAIT02
GETMSG
CNLTIM
RELEVB
ERRPRO

NTM/SERV Module Documentation

NAME: GETTIM
PURPOSE: GET THE SYSTEM TIME AS A BINARY STRING.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: GETTIM
SOURCE FILE TYPE: .COB
HOST: VAX
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

- CALLS VMS SERVICES: SYS\$GETTIM
THE GET TIME SYSTEM SERVICE FURNISHES THE CURRENT SYSTEM
TIME IN 64-BIT FORMAT. THE SYSTEM TIME IS UPDATED EVERY
10 MILLISECONDS, AND THE TIME IS RETURNED IN
100-NANOSECOND UNITS FROM THE SYSTEM BASE TIME.

ARGUMENTS:

TIME-VALUE = DSPLY [9(18)]
NTM-RETURN = DSPLY [X(5)]
SS-STATUS = DSPLY [S9(9)]

ROUTINES CALLED:

SYS\$GETTIM

NTM/SERV Module Documentation

NAME: GETUSR2
PURPOSE: RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL,
AND USER NAME.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: GETUSR2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND
USER NAME TO THE CALLING AP. NOTE: USER NAME
IS RETURNED ONLY IF THE ORIGINAL SOURCE AP
IS THE USER INTERFACE.
-

ARGUMENTS:

R-AP-NAME = DSPLY [X(10)]
LOGICAL-CHANNEL = DSPLY [X(3)]
USER-NAME = DSPLY [X(8)]
ROLE-NAME = DSPLY [X(10)]
TERM-ID = DSPLY [X(2)]
GETUSR-RET = DSPLY [X(5)]
API-GLOBAL-NAME-SEC = RECRD
API-GLOBAL-BUFFER-SEC = RECRD
HOT-MBX-EVENT-BLK = DSPLY [X(2032)]
COLD-MBX-EVENT-BLK = DSPLY [X(2032)]
SEND-EVENT-BLK = DSPLY [X(2032)]
ACK-MBX-EVENT-BLK = DSPLY [X(2032)]
TIMER-EVENT-BLK = DSPLY [X(80)]
TEST-MODE-FLAG = DSPLY [X]

INCLUDE FILES:

SRVRET - AS THE RETURN GIVEN A TABLE-FULL ERROR
SRVCD2 - THAT CALL NSEND AND RCV
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEVB - **** PURPOSE NOT FOUND BY STRIPPER ****
TSTMDE - SPACES OR 0.
ERRPRO - PROCESS ERROR INCLUDE FILE

PS 620342300
30 September 1990

ROUTINES CALLED:

NSEND2 - SEND MESSAGE TO AN AP IN THE IISS.
RCV2 - RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
ERRPRO

NTM/SERV Module Documentation

NAME: INICOM2
PURPOSE: INITIALIZE AP'S CONNECTION TO THE IISS.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: INICOM2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

-

ARGUMENTS:

COMM-RCV-EVENT-BLOCK = DSPLY [X(2032)]
INPUT-MBX-NAME = DSPLY [X(14)]
APC-HOT-MBX-NAME = DSPLY [X(14)]
APC-COLD-MBX-NAME = DSPLY [X(14)]
RET-STATUS = DSPLY [X(5)]
MPU-INSTANCE = DSPLY [XX]

INCLUDE FILES:

ALMSGH - SPACES OR 0.
INICMD - PROCESS ERROR INCLUDE FILE
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

GETNAM
CRTMBX
SNDMSG
SETTIM
WAIT01
RCVMSG
WAIT02
GETMSG
ERRPRO

NTM/SERV Module Documentation

NAME: INITIAL2
PURPOSE: INITIALIZE AP'S CONNECTION TO THE TIV MPU.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: INITIAL2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

-

ARGUMENTS:

BUFFER = DSPLY [X(4096)]
BUFFER-SIZE = DSPLY [9(5)]
SYS-STATE = DSPLY [X]
USER-RET-CODE = DSPLY [X(5)]
API-GLOBAL-NAME-SEC = RECRD
API-GLOBAL-BUFFER-SEC = RECRD
HOT-MBX-EVENT-BLK = DSPLY [X(2032)]
COLD-MBX-EVENT-BLK = DSPLY [X(2032)]
SEND-EVENT-BLK = DSPLY [X(2032)]
ACK-MBX-EVENT-BLK = DSPLY [X(2032)]
TIMER-EVENT-BLK = DSPLY [X(80)]
TEST-MODE-FLAG = DSPLY [X]

INCLUDE FILES:

APIINI - FOR INITIATION PURPOSES
ALMSGH - SPACES OR 0.
APILCL - THE APIS COMMON LOCAL DATA.
APCNM2 - SERVICE CODES FOR THE NTM SERVICE ROUTINES.
SRVCDs - SERVICE CODES FOR THE NTM SERVICE ROUTINES.
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAP1 - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEVb - **** PURPOSE NOT FOUND BY STRIPPER ****
TSTMDE - SPACES OR 0.
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

LOCKEF
GETNAM
CRTMBX

PS 620342300
30 September 1990

RCVMSG
SETTIM
WAIT02
GETMSG
SNDMSG
WAIT01
DELMBX
RELEVB
ERRPRO

NTM/SERV Module Documentation

NAME: INITEX2
PURPOSE: INITIALIZE UI LIKE AP'S CONNECTION TO THE
UIV MPU.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: INITEX2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

-

ARGUMENTS:

BUFFER = DSPLY [X(9999)]
BUFFER-SIZE = DSPLY [9(5)]
USER-RET-CODE = DSPLY [X(5)]
API-GLOBAL-NAME-SEC = RECRD
API-GLOBAL-BUFFER-SEC = RECRD
HOT-MBX-EVENT-BLK = DSPLY [X(2032)]
COLD-MBX-EVENT-BLK = DSPLY [X(2032)]
SEND-EVENT-BLK = DSPLY [X(2032)]
ACK-MBX-EVENT-BLK = DSPLY [X(2032)]
TIMER-EVENT-BLK = DSPLY [X(80)]
TEST-MODE-FLAG = DSPLY [X]

INCLUDE FILES:

APIINI - FOR INITIATION PURPOSES
ALMSGH - SPACES OR 0.
APILCL - THE APIS COMMON LOCAL DATA.
SRVCDS - SERVICE CODES FOR THE NTM SERVICE ROUTINES.
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
APCNM1 - APIS GLOBAL NAME DATA.
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEVB - **** PURPOSE NOT FOUND BY STRIPPER ****
TSTMDE - SPACES OR 0.
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

GETNAM
CRTMBX
SNDMSG

PS 620342300
30 September 1990

SETTIM
WAIT01
RCVMSG
WAIT02
GETMSG
DELMBX
ERRPRO

NTM/SERV Module Documentation

NAME: INITIL2
PURPOSE: INITIALIZE AN AP's CONNECTION TO AN AP
SELECTED MPU.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: INITIL2
SOURCE FILE TYPE: .COB
HOST: VAX
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

-

ARGUMENTS:

BUFFER = DSPLY [X(4096)]
BUFFER-SIZE = DSPLY [9(5)]
MPU-NAME = DSPLY [X(3)]
SYS-STATE = DSPLY [X]
USER-RET-CODE = DSPLY [X(5)]
API-GLOBAL-NAME-SEC = RECRD
API-GLOBAL-BUFFER-SEC = RECRD
HOT-MBX-EVENT-BLK = DSPLY [X(2032)]
COLD-MBX-EVENT-BLK = DSPLY [X(2032)]
SEND-EVENT-BLK = DSPLY [X(2032)]
ACK-MPX-EVENT-BLK = DSPLY [X(2032)]
TIMER-EVENT-BLK = DSPLY [X(80)]
TEST-MODE-FLAG = DSPLY [X]

INCLUDE FILES:

APIINI - FOR INITIATION PURPOSES
ALMSGH - SPACES OR 0.
APILCL - THE APIS COMMON LOCAL DATA.
APCNM2 - SERVICE CODES FOR THE NTM SERVICE ROUTINES.
SRVCDS - SERVICE CODES FOR THE NTM SERVICE ROUTINES.
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEVB - **** PURPOSE NOT FOUND BY STRIPPER ****
TSTMDE - SPACES OR 0.
ERRPRO - PROCESS EPROR INCLUDE FILE

ROUTINES CALLED:

GETNAM

PS 620342300
30 September 1990

CRTMBX
RCVMSG
SETTIM
WAIT02
GETMSG
SNDMSG
WAIT01
DELMBX
RELEVB
ERRPRO

NTM/SERV Module Documentation

NAME: INSTNC2
PURPOSE: GET THE SYSGEN INSTANCE NUMBER.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: INSTNC2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

-

ARGUMENTS:

INSTANCE-NUMBER = DSPLY [XX]
RET-STATUS = DSPLY [X(5)]
MPU-INSTANCE = DSPLY [XX]

NTM/SERV Module Documentation

NAME: ISEND2
PURPOSE: SEND MESSAGE THAT WILL CAUSE THE SPECIFIC
INITIATION OF AN
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: ISEND2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

-

ARGUMENTS:

DSTINATION = DSPLY [X(10)]
LOGICAL-CHANNEL = DSPLY [X(3)]
TIMEOUT-VALUE = DSPLY [X(15)]
DATA-TYPE = DSPLY [X]

INCLUDE FILES:

MSGSTR - PURPOSE
APILCL - THE APIS COMMON LOCAL DATA.
SRVCDs - SERVICE CODES FOR THE NTM SERVICE ROUTINES.
REISTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAP1 - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEVb - **** PURPCSE NOT FOUND BY STRIPPER ****
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

ENDMSG
SEIIM
WAIT01
RCVMSG
WAIT02
CEIMSG
ENLIM
PIEVb
ERRPRO

NTM/SERV Module Documentation

NAME: LOGOFF2
PURPOSE: SENDS LOGOFF MESSAGE TO THE MONITOR AP.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: LOGOFF2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

ACCEPTS LOGOFF DATA FROM THE UI AND FORWARDS
A MESSAGE TO THE MONITOR AP FOR UPDATING THE
IISS LOGON TABLE.
-

ARGUMENTS:

TERMINAL-ID = DSPLY [X(2)]
USER-NAME = DSPLY [X(8)]
ROLE-NAME = DSPLY [X(10)]
LOG-RET-CODE = DSPLY [X(5)]
API-GLOBAL-NAME-SEC = RECRD
API-GLOBAL-BUFFER-SEC = RECRD
HOT-MBX-EVENT-BLK = DSPLY [X(2032)]
COLD-MBX-EVENT-BLK = DSPLY [X(2032)]
SEND-EVENT-BLK = DSPLY [X(2032)]
ACK-MBX-EVENT-BLK = DSPLY [X(2032)]
TIMER-EVENT-BLK = DSPLY [X(80)]

INCLUDE FILES:

SRVRET - AS THE RETURN GIVEN A TABLE-FULL ERROR
SRVCD2 - THAT CALL NSEND AND RCV
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEBV - **** PURPOSE NOT FOUND BY STRIPPER ****
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

NSEND2 - SEND MESSAGE TO AN AP IN THE IISS.
ERRPRO

NTM/SERV Module Documentation

NAME: LOGON2
PURPOSE: SENDS LOGON MESSAGE TO THE MONITOR AP.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: LOGON2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

ACCEPTS LOGON DATA FROM THE UI AND FORWARDS
A MESSAGE TO THE MONITOR AP FOR UPDATING THE
IISS LOGON TABLE. WAITS ON THE RESPONSE FROM
MONITOR BEFORE RETURNING CONTROL TO THE UI.
-

ARGUMENTS:

TERMINAL-ID = DSPLY [X(2)]
USER-NAME = DSPLY [X(8)]
ROLE-NAME = DSPLY [X(10)]
SESSION-START-TIME = DSPLY [X(23)]
CHAN-RANGE-START = DSPLY [X(3)]
CHAN-RANGE-END = DSPLY [X(3)]
LOG-RET-CODE = DSPLY [X(5)]
API-GLOBAL-NAME-SEC = RECRD
API-GLOBAL-BUFFER-SEC = RECRD
HOT-MBX-EVENT-BLK = DSPLY [X(2032)]
COLD-MBX-EVENT-BLK = DSPLY [X(2032)]
SEND-EVENT-BLK = DSPLY [X(2032)]
ACK-MBX-EVENT-BLK = DSPLY [X(2032)]
TIMER-EVENT-BLK = DSPLY [X(80)]
TEST-MODE-FLAG = DSPLY [X]

INCLUDE FILES:

SRVRET - AS THE RETURN GIVEN A TABLE-FULL ERROR
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
SRVCD2 - THAT CALL NSEND AND RCV
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEVb - **** PURPOSE NOT FOUND BY STRIPPER ****
ISTMDE - SPACES OR 0.
ERRPRO - PROCESS ERROR INCLUDE FILE

PS 620342300
30 September 1990

ROUTINES CALLED:

NSEND2 - SEND MESSAGE TO AN AP IN THE IISS.
RCV2 - RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
ERRPRO

NTM/SERV Module Documentation

NAME: MBXLG2
PURPOSE: PURPOSE NOT KNOWN - ACTIVE CODE.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: MBXLG2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

-

ARGUMENTS:

CALL-NAME = DSPLY [X(72)]

NTM/SERV Module Documentation

NAME: MBXLOG
PURPOSE: PURPOSE NOT KNOWN - ACTIVE CODE.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: MBXLOG
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

-

ARGUMENTS:

MSG-BUFFER = DSPLY [X(72)]

ROUTINES CALLED:

GETNAM

NTM/SERV Module Documentation

NAME: NSEND2
PURPOSE: SEND MESSAGE TO AN AP IN THE IISS.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: NSEND2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

-

ARGUMENTS:

DSTINATION = DSPLY [X(10)]
LOGICAL-CHANNEL = DSPLY [X(3)]
TIMEOUT-VALUE = DSPLY [X(15)]
DATA-TYPE = DSPLY [X]

INCLUDE FILES:

MSGSTR - PURPOSE
APII.LCL - THE APIS COMMON LOCAL DATA.
SRV.CDS - SERVICE CODES FOR THE NTM SERVICE ROUTINES.
RETSIR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUF.API - **** PURPOSE NOT FOUND BY STRIPPER ****
API.EVB - **** PURPOSE NOT FOUND BY STRIPPER ****
ERR.PRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

SENDMSG
SETTIM
WAIT01
RCVMSG
WAIT02
GETMSG
CNLTIM
FELEVB
ERRPRO

CALLED DIRECTLY BY:

CHGROL2 - CHANGE THE ROLE UNDER WHICH A USER LOGGED ON.

GDACK2 - SENDS GD ACK MESSAGE TO LOCAL MPU.
GETUSR2 - RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND
USER NAME.
LOGOFF2 - SENDS LOGOFF MESSAGE TO THE MONITOR AP.
LOGON2 - SENDS LOGON MESSAGE TO THE MONITOR AP.
SIGABT2 - SIGNAL THE MPU TO ABORT A CHILD AP
SIGERR2 - SENDS AN ERROR MESSAGE TO MONITOR AND TO
ORIGINAL SOURCE.
WTHST2 - RETURNS THE NAME OF THE HOST ON WHICH AN AP
RESIDES.

USED IN MAIN PROGRAM(S):

CHGROL2 - CHANGE THE ROLE UNDER WHICH A USER LOGGED ON.
GDACK2 - SENDS GD ACK MESSAGE TO LOCAL MPU.
GETUSR2 - RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND
USER NAME.
LOGOFF2 - SENDS LOGOFF MESSAGE TO THE MONITOR AP.
LOGON2 - SENDS LOGON MESSAGE TO THE MONITOR AP.
SIGABT2 - SIGNAL THE MPU TO ABORT A CHILD AP
SIGERR - CALL SIGERR2
WTHST - CALL WTHST2

NTM/SERV Module Documentation

NAME: POSTCOM
PURPOSE:
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: POSTCOM
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

ARGUMENTS:

FILENAM = DSPLY [X(30)]

ROUTINES CALLED:

RCLFILE -

CALLED DIRECTLY BY:

RCLE - REMOTE COMPILE AND LINK EXPERT DRIVER

USED IN MAIN PROGRAM(S):

RCLE - REMOTE COMPILE AND LINK EXPERT DRIVER

NTM/SERV Module Documentation

NAME: PRECOM
PURPOSE:
LANGUAGE: VAX-11 COBOL
MODULE TYPE: PROGRAM
SOURCE FILE: PRECOM
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

ROUTINES CALLED:

RCLFILE -

CALLED DIRECTLY BY:

RCLE - REMOTE COMPILE AND LINK EXPERT DRIVER

USED IN MAIN PROGRAM(S):

RCLE - REMOTE COMPILE AND LINK EXPERT DRIVER

NTM/SERV Module Documentation

NAME: QSEND2
PURPOSE: SEND MESSAGES TO OTHER APS IN THE IISS
FROM QSERVER AP'S.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: QSEND2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

THIS ROUTINE IS A PRELIMINARY VERSION OF THE SEND*
SERVICE FOR THE QSERVER. CURRENTLY, IT ONLY *
SUPPORTS QSERVERS THAT SERVICE ONE REQUEST AT A *
TIME. *

ARGUMENTS:

DSTINATION = DSPLY [X(10)]
LOGICAL-CHANNEL = DSPLY [X(3)]
TIMEOUT-VALUE = DSPLY [X(15)]
DATA-TYPE = DSPLY [X]
MESSAGE-TYPE = DSPLY [X(2)]
SEND-SIZE = DSPLY [9(5)]
USER-DATA = RECRD
ACCEPT-STATUS = DSPLY [X(5)]
API-GLOBAL-NAME-SEC = RECRD
API-GLOBAL-BUFFER-SEC = RECRD
HOT-MBX-EVENT-BLK = DSPLY [X(2032)]
COLD-MBX-EVENT-BLK = DSPLY [X(2032)]
SEND-EVENT-BLK = DSPLY [X(2032)]
ACK-MBX-EVENT-BLK = DSPLY [X(2032)]
TIMER-EVENT-BLK = DSPLY [X(80)]

INCLUDE FILES:

MSGSTR - PURPOSE
APILCL - THE APIS COMMON LOCAL DATA.
SRVCDS - SERVICE CODES FOR THE NTM SERVICE ROUTINES.
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEBV - **** PURPOSE NOT FOUND BY STRIPPER ****
ERRPRO - PROCESS ERROR INCLUDE FILE

PS 620342300
30 September 1990

ROUTINES CALLED:

SNDMSG
SETTIM
WAIT01
RCVMSG
WAIT02
GETMSG
CNLTIM
RELEVB
ERRPRO

NTM/SERV Module Documentation

NAME: RCLE
PURPOSE: REMOTE COMPILE AND LINK EXPERT DRIVER
LANGUAGE: VAX-11 COBOL
MODULE TYPE: PROGRAM
SOURCE FILE: RCLE
SOURCE FILE TYPE: .COB
HOST: VAX
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

RCLE IS INITIATED BY "SNDRCLE" NTM SERVICE. IT BUILDS A *
COMMAND FILE WHICH INCLUDES THE SYSTEM CONTROL CARDS FOUND
IN THE INITIATING MESSAGE. THIS COMMAND FILE IS THEN RUN AS
A DETACHED PROCESS. WHEN IT COMPLETES, RCLE WILL RETURN A
MESSAGE CONTAINING THE NAME OF THE LOG FILE.
MODIFIED: 7/19/85 TO NOT CALL GETUSER. IT NOW REPLIES TO
RCV.

INCLUDE FILES:

SRVRET - AS THE RETURN GIVEN A TABLE-FULL ERROR
APILCL - THE APIS COMMON LOCAL DATA.
APIEBV - **** PURPOSE NOT FOUND BY STRIPPER ****
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

INITAL
RCV
RCLFILE -
PRECOM -
POSTCOM -
SYS\$GETJPI
SYS\$CREPRC
SETTIM
WAIT01
NSEND
TRMNAT - CALL TRMNAT2
ERRPRO

NTM/SERV Module Documentation

NAME: RCLFILE
PURPOSE:
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: RCLFILE
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

ARGUMENTS:

C-CARD = DSPLY [X(72)]
REQUEST = DSPLY [X(5)]

CALLED DIRECTLY BY:

POSTCOM -
PRECOM -
RCLE - REMOTE COMPILE AND LINK EXPERT DRIVER

USED IN MAIN PROGRAM(S):

RCLE - REMOTE COMPILE AND LINK EXPERT DRIVER

NTM/SERV Module Documentation

NAME: RCV2
PURPOSE: RECEIVE MESSAGES FROM OTHER AP'S IN THE
 IISS .
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: RCV2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

-

ARGUMENTS:

LOGICAL-CHANNEL = DSPLY [X(3)]
WAIT-FLAG = DSPLY [X]
MSG-SOURCE = DSPLY [X(10)]
MESSAGE-TYPE = DSPLY [X(2)]
DATA-LENGTH = DSPLY [9(5)]
USER-DATA = RECRD
ACCEPT-STATUS = DSPLY [X(5)]
MSG-SERIAL-NUMBER = DSPLY [X(7)]
API-GLOBAL-NAME-SEC = RECRD
API-GLOBAL-BUFFER-SEC = RECRD
HOT-MBX-EVENT-BLK = DSPLY [X(2032)]
COLD-MBX-EVENT-BLK = DSPLY [X(2032)]
SEND-EVENT-BLK = DSPLY [X(2032)]
ACK-MBX-EVENT-BLK = DSPLY [X(2032)]
TIMER-EVENT-BLK = DSPLY [X(80)]
TEST-MODE-FLAG = DSPLY [X]

INCLUDE FILES:

MSGSTR - PURPOSE
APILCL - THE APIS COMMON LOCAL DATA.
SRVCDS - SERVICE CODES FOR THE NTM SERVICE ROUTINES.
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEBV - **** PURPOSE NOT FOUND BY STRIPPER ****
TSTMDE - SPACES OR 0.
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

```
RCVMSG
WAIT02
WAIT01
GETMSG
ERRPRO
```

CALLED DIRECTLY BY:

```

GETUSR2      - RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND
               USER NAME.
LOGON2       - SENDS LOGON MESSAGE TO THE MONITOR AP.
WHTHST2      - RETURNS THE NAME OF THE HOST ON WHICH AN AP
               RESIDES.

```

USED IN MAIN PROGRAM(S):

```
GETUSR2      - RETURNS ORIGINAL SOURCE, LOGICAL CHANNEL, AND
               USER NAME.
LOGON2       - SENDS LOGON MESSAGE TO THE MONITOR AP.
WHTHST       - CALL WHTHST2
```

NTM/SERV Module Documentation

NAME: SIGABT2
PURPOSE: SIGNAL THE MPU TO ABORT A CHILD AP
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: SIGABT2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

NTM SERVICE TO SIGNAL ABORT CHILD TO THE MPU. *
AFTER THIS PROCESS, THE MPU PROCESS "ABORT" TAKES OVER. *

-
TELL THE LOCAL MPU TO ABORT A CHILD. THE CHILD MAY BE ON
THE SAME OR DIFFERENT CLUSTER/HOST.

ARGUMENTS:

AP-NAME = DSPLY [X(10)]

INCLUDE FILES:

SRVRET - AS THE RETURN GIVEN A TABLE-FULL ERROR
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
SRVCD2 - THAT CALL NSEND AND RCV
APILCL - THE APIS COMMON LOCAL DATA.
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEBV - **** PURPOSE NOT FOUND BY STRIPPER ****
TSTMDE - SPACES OR 0.
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

NSEND2 - SEND MESSAGE TO AN AP IN THE IISS.
ERRPRO

NTM/SERV Module Documentation

NAME: SIGERR
PURPOSE: CALL SIGERR2
LANGUAGE: C
MODULE TYPE: FUNCTION
FUNCTION TYPE: INT ()
SOURCE FILE: SIGERR
SOURCE FILE TYPE: .C
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

SYNOPSIS

CALL SIGERR USING ERROR-CODE,
SEVERITY-LEVEL,
ERROR-DESCRIPTION,
RETURN-CODE.

INPUTS/OUTPUTS:

INPUTS:

ERROR-CODE PIC X(5).
SEVERITY-LEVEL PIC X.
ERROR-DESCRIPTION PIC X(72).

OUTPUTS:

RETURN-CODE PIC X(5).

DESCRIPTION

SIGERR IMPLIMENTS A TWO-STEP CALL TO SIGERR2,
ADDING THE ADDRESSES OF GLOBAL AREAS TO THE
PARAMETER LIST (IBM COBOL DOESN'T ALLOW EXTERNAL
DATA AREAS).

ARGUMENTS:

A = CHAR *
B = CHAR *
C = CHAR *
D = CHAR *

INCLUDE FILES:

APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEVb - **** PURPOSE NOT FOUND BY STRIPPER ****

ROUTINES CALLED:

APACCT
SIGERR2

- SENDS AN ERROR MESSAGE TO MONITOR AND TO
ORIGINAL SOURCE.

NTM/SERV Module Documentation

NAME: SIGERR2
PURPOSE: SENDS AN ERROR MESSAGE TO MONITOR AND TO ORIGINAL SOURCE.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: SIGERR2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

ACCEPTS ERROR DATA FROM AN AP AND FORWARDS *
A MESSAGE TO THE MONITOR AP FOR ITS ERROR *
REPORTING AND ONE TO THE ORIGINAL SOURCE OF THE *
AP. *
-

ARGUMENTS:

ERROR-CODE = DSPLY [X(5)]
SEVERITY-LEVEL = DSPLY [X]
ERROR-DESCRIPTION = DSPLY [X(72)]
RTN-CODE = DSPLY [X(5)]
API-GLOBAL-NAME-SEC = RECRD
API-GLOBAL-BUFFER-SEC = RECRD
HOT-MBX-EVENT-BLK = DSPLY [X(2032)]
COLD-MBX-EVENT-BLK = DSPLY [X(2032)]
SEND-EVENT-BLK = DSPLY [X(2032)]
ACK-MBX-EVENT-BLK = DSPLY [X(2032)]
TIMER-EVENT-BLK = DSPLY [X(80)]

INCLUDE FILES:

SRVRET - AS THE RETURN GIVEN A TABLE-FULL ERROR
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
SRVCD2 - THAT CALL NSEND AND RCV
APILCL - THE APIS COMMON LOCAL DATA.
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEVB - **** PURPOSE NOT FOUND BY STRIPPER ****
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

NSEND2 - SEND MESSAGE TO AN AP IN THE IISS.
ERRPRO

CALLED DIRECTLY BY:

SIGERR - CALL SIGERR2

USED IN MAIN PROGRAM(S):

SIGERR - CALL SIGERR2

NTM/SERV Module Documentation

NAME: SNDRCLE
PURPOSE: REMOTE COMPILE AND LINK EXPERT CALLING
SERVICE
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: SNDRCLE
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

ARGUMENTS:

NODE = DSPLY [X(3)]
CHANNEL = DSPLY [X(3)]
CTL-CARD = DSPLY [X(1096)]
RET-STATUS = DSPLY [X(5)]

INCLUDE FILES:

SRVRET - AS THE RETURN GIVEN A TABLE-FULL ERROR

ROUTINES CALLED:

ISEND

NTM/SERV Module Documentation

NAME: TRMNAT
PURPOSE: CALL TRMNAT2
LANGUAGE: C
MODULE TYPE: FUNCTION
FUNCTION TYPE: INT ()
SOURCE FILE: TRMNAT
SOURCE FILE TYPE: .C
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

SYNOPSIS

CALL TRMNAT USING USER-TERMINATE-STATUS.

INPUTS/OUTPUTS:

INPUTS:

USER-TERMINATE-STATUS PIC X.

OUTPUTS:

DESCRIPTION

TRMNAT IMPLIMENTS A TWO-STEP CALL TO TRMNAT2,
ADDING THE ADDRESSES OF GLOBAL AREAS TO THE
PARAMETER LIST (IBM COBOL DOESN'T ALLOW EXTERNAL
DATA AREAS).

ARGUMENTS:

A = CHAR *

INCLUDE FILES:

APINME - ***** PURPOSE NOT FOUND BY STRIPPER *****
APIEBV - ***** PURPOSE NOT FOUND BY STRIPPER *****

ROUTINES CALLED:

APACCT
TRMNAT2 - TERMINATE AN AP'S CONNECTION TO THE IISS.

CALLED DIRECTLY BY:

RCLE - REMOTE COMPILE AND LINK EXPERT DRIVER

PS 620342300
30 September 1990

USED IN MAIN PROGRAM(S):

RCLE - REMOTE COMPILE AND LINK EXPERT DRIVER

NTM/SERV Module Documentation

NAME: TRMNAT2
PURPOSE: TERMINATE AN AP'S CONNECTION TO THE IISS.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: TRMNAT2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

-

ARGUMENTS:

USER-TERMINATE-STATUS = DSPLY [X]
API-GLOBAL-NAME-SEC = RECRD
HOT-MBX-EVENT-BLK = DSPLY [X(2032)]
COLD-MBX-EVENT-BLK = DSPLY [X(2032)]
SEND-EVENT-BLK = DSPLY [X(2032)]
ACK-MBX-EVENT-BLK = DSPLY [X(2032)]
TIMER-EVENT-BLK = DSPLY [X(80)]

INCLUDE FILES:

ADMSGH - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
APILCL - THE APIS COMMON LOCAL DATA.
SRVCDS - SERVICE CODES FOR THE NTM SERVICE ROUTINES.
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEVB - **** PURPOSE NOT FOUND BY STRIPPER ****
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

DELMBX
ENDRUN
SNDMSG
SETTIM
WAIT01
RELEVB
ERRPRO

CALLED DIRECTLY BY:

TRMNAT - CALL TRMNAT2

PS 620342300
30 September 1990

USED IN MAIN PROGRAM(S):

RCLE - REMOTE COMPILE AND LINK EXPERT DRIVER

NTM/SERV Module Documentation

NAME: TRMNAX
PURPOSE: CALL TRMNAX2
LANGUAGE: C
MODULE TYPE: FUNCTION
FUNCTION TYPE: INT ()
SOURCE FILE: TRMNAX
SOURCE FILE TYPE: .C
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

SYNOPSIS

CALL TRMNAX USING USER-TERMINATE-STATUS.

INPUTS/OUTPUTS:

INPUTS:

USER-TERMINATE-STATUS PIC X.

OUTPUTS:

DESCRIPTION

TRMNAX IMPLIMENTS A TWO-STEP CALL TO TRMNAX2,
ADDING THE ADDRESSES OF GLOBAL AREAS TO THE
PARAMETER LIST (IBM COBOL DOESN'T ALLOW EXTERNAL
DATA AREAS).

ARGUMENTS:

A = CHAR *

ROUTINES CALLED:

AFACCT
TRMNAX2 - TERMINATE COMM'S CONNECTION TO THE IISS.

NTM/SERV Module Documentation

NAME: TRMNAX2
PURPOSE: TERMINATE COMM'S CONNECTION TO THE IISS.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: TRMNAX2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

SINCE COMM DELETES ITS INPUT MAILBOX, TRMNAX HAS ONLY *
TWO FUNCTIONS. THEY ARE: SEND THE "AP DYING" MESSAGE *
TO THE COMM APC AND THEN CALL "ENDRUN" TO TERMINATE THE *
AP. *

-

ARGUMENTS:

USER-TERMINATE-STATUS = DSPLY [X]
MPU-INSTANCE = DSPLY [XX]

INCLUDE FILES:

ADMSGH - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
APILCL - THE APIS COMMON LOCAL DATA.
SRVCDS - SERVICE CODES FOR THE NTM SERVICE ROUTINES.
COMAPC - PROCESS ERROR INCLUDE FILE
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

GETNAM
ENDRUN
SNDMSG
SETTIM
WAIT01
RELEVB
ERRPRO

CALLED DIRECTLY BY:

TRMNAX - CALL TRMNAX2

USED IN MAIN PROGRAM(S):

TRMNAX - CALL TRMNAX2

NTM/SERV Module Documentation

NAME: TSTMOD
PURPOSE: CALL COBOL ROUTINE TSTMOD2
LANGUAGE: C
MODULE TYPE: FUNCTION
FUNCTION TYPE: INT ()
SOURCE FILE: TSTMOD
SOURCE FILE TYPE: .C
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

SYNOPSIS

CALL TSTMOD USING TEST-STATUS,
RETURN-CODE.

INPUTS/OUTPUTS:

INPUTS:

TEST-STATUS PIC X.

OUTPUTS:

RETURN-CODE PIC X(5).

DESCRIPTION

TSTMOD IMPLIMENTS A TWO-STEP CALL TO TSTMOD2,
ADDING THE ADDRESSES OF GLOBAL AREAS TO THE
PARAMETER LIST (IBM COBOL DOESN'T ALLOW EXTERNAL
DATA AREAS).

ARGUMENTS:

A = CHAR *
B = CHAR *

INCLUDE FILES:

APIEBV - **** PURPOSE NOT FOUND BY STRIPPER ****

ROUTINES CALLED:

APACCT
TSTMOD2 - SET/RESET THE TEST-MODE-FLAG.

NTM/SERV Module Documentation

NAME: TSTMOD2
PURPOSE: SET/RESET THE TEST-MODE-FLAG.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: TSTMOD2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

TSTMOD2 IS TO BE CALLED BY
THE UI TO SET/RESET THE TEST-MODE-FLAG . WHEN SET *
THE UI WILL RECEIVE ASYNCHRONOUS ERROR MESSAGES FOR *
THE USER IT IS SERVICING. WHEN THE TEST-MODE-FLAG *
IS OFF, THE ASYNCH ERROR MESSAGES WILL BE DISCARDED *

-

ARGUMENTS:

TEST-STATUS = DSPLY [X]

INCLUDE FILES:

SRVCD2 - THAT CALL NSEND AND RCV
TSTMDE - SPACES OR 0.

CALLED DIRECTLY BY:

TSTMOD - CALL COBOL ROUTINE TSTMOD2

USED IN MAIN PROGRAM(S):

TSTMOD - CALL COBOL ROUTINE TSTMOD2

NTM/SERV Module Documentation

NAME: WTHST
PURPOSE: CALL WTHST2
LANGUAGE: C
MODULE TYPE: FUNCTION
FUNCTION TYPE: INT ()
SOURCE FILE: WTHST
SOURCE FILE TYPE: .C
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

SYNOPSIS

CALL WTHST USING REQ-AP-NAME,
AP-HOST-NAME,
RETURN-STATUS.

INPUTS/OUTPUTS:

INPUTS:

REQ-AP-NAME PIC X(10).

OUTPUTS:

AP-HOST-NAME PIC X(3).
RETURN-STATUS PIC X(5).

DESCRIPTION

WTHST IMPLIMENTS A TWO-STEP CALL TO WTHST2,
ADDING THE ADDRESSES OF GLOBAL AREAS TO THE
PARAMETER LIST (IBM COBOL DOESN'T ALLOW EXTERNAL
DATA AREAS).

ARGUMENTS:

A = CHAR *
B = CHAR *
C = CHAR *

INCLUDE FILES:

APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEVb - **** PURPOSE NOT FOUND BY STRIPPER ****

ROUTINES CALLED:

APACCT
WTHST2 - RETURNS THE NAME OF THE HOST ON WHICH AN AP
RESIDES.

NTM/SERV Module Documentation

NAME: WTHST2
PURPOSE: RETURNS THE NAME OF THE HOST ON WHICH AN
AP RESIDES.
LANGUAGE: VAX-11 COBOL
MODULE TYPE: SUBROUTINE
SOURCE FILE: WTHST2
SOURCE FILE TYPE: .COB
HOST:
SUBSYSTEM: NTM
SUBDIRECTORY: SERVICES
DOCUMENTATION GROUP: NTMSERV

DESCRIPTION:

ACCEPTS AN AP NAME FROM A REQUESTING AP AND RETURNS
THE NAME OF THE HOST ON WHICH THE SPECIFIED AP RESIDES.
IF THE INFO IS NOT FOUND, AN UNSUCCESSFUL STATUS CODE
IS RETURNED TO THE CALLING AP.
-

ARGUMENTS:

REQ-AP-NAME = DSPLY [X(10)]
AP-HOST-NAME = DSPLY [X(3)]
RETURN-STATUS = DSPLY [X(5)]
API-GLOBAL-NAME-SEC = RECRD
API-GLOBAL-BUFFER-SEC = RECRD
HOT-MBX-EVENT-BLK = DSPLY [X(2032)]
COLD-MBX-EVENT-BLK = DSPLY [X(2032)]
SEND-EVENT-BLK = DSPLY [X(2032)]
ACK-MBX-EVENT-BLK = DSPLY [X(2032)]
TIMER-EVENT-BLK = DSPLY [X(80)]
TEST-MODE-FLAG = DSPLY [X]

INCLUDE FILES:

RETSTR - THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
SRVRET - AS THE RETURN GIVEN A TABLE-FULL ERROR
SRVCD2 - THAT CALL NSEND AND RCV
APINME - **** PURPOSE NOT FOUND BY STRIPPER ****
BUFAPI - **** PURPOSE NOT FOUND BY STRIPPER ****
APIEVB - **** PURPOSE NOT FOUND BY STRIPPER ****
TSTMDE - SPACES OR 0.
ERRPRO - PROCESS ERROR INCLUDE FILE

ROUTINES CALLED:

NSEND2 - SEND MESSAGE TO AN AP IN THE IISS.
RCV2 - RECEIVE MESSAGES FROM OTHER AP'S IN THE IISS .
ERRPRO

CALLED DIRECTLY BY:

WTHST - CALL WTHST2

USED IN MAIN PROGRAM(S):

WTHST - CALL WTHST2

3.10.9 Include File Descriptions

The following list contains a purpose and description of each include file listed in 3.10.4 as specified in the source code. The language it is written in is also given.

NTM/SERV Include File Description

FILE NAME: ADMSGH
PURPOSE: THE APIS COMMON LOCAL DATA FOR ERROR-RETURNS.
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

MODIFIED 8/20/84 INITIALIZE ALL LOCAL VARIABLES TO SPACES
OR 0
MODIFIED 5/24/85 CLEAN-UP.

NTM/SERV Include File Description

FILE NAME: ALMSGH
PURPOSE: SPACES OR 0.
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

NTM/SERV Include File Description

FILE NAME: APCNM1
PURPOSE: APIS GLOBAL NAME DATA.
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

MODIFIED 8/24/84 MSG-RCV-BUFFER TO OCCUR 20 TIMES.
MODIFIED 10/25/83 TO MOVE AP'S NUMBER OF MAILBOXES VALUE TO
TO THE SYSTEM STATE BLOCK.
RESTORED 11/22/83
MODIFIED 12/21/83 FOR ACK MAILBOX VALUES.
MODIFIED 1/30/84 FOR EXPANDED AP NAME.
MODIFIED 2/01/84 PARTITIONED FROM OLD APISEC.INC TO REDUCE
STORAGE IN SERVICES.
MODIFIED 7/05/84 REMOVED EXTERNAL FLAG. APM
MODIFIED 5/24/85 CLEAN-UP....6/3/85 CLEANUP CLEANED UP.
MODIFIED 6/14/85 PRONME CONTAINS ONLY APNAME AND INSTANCE

NTM/SERV Include File Description

FILE NAME: APCNM2
PURPOSE: SERVICE CODES FOR THE NTM SERVICE ROUTINES.
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

MODIFIED 10/06/83 TO INCLUDE INITEX-RES-NOT-AVAIL.
MODIFIED 11/02/83 TO INCLUDE WTHST- CODES.
MODIFIED 1/09/84 TO CHANGE ERROR CODES TO PIC X(5) AND TO
ELIMINATE ALPHA CHARACTERS.
MODIFIED 1/26/84 TO ADD SERVICE-SUCCESS (GENERIC) AND

PS 620342300
30 September 1990

NTM/SERV Include File Description

FILE NAME: APIEBB
PURPOSE: **** PURPOSE NOT FOUND BY STRIPPER ****
LANGUAGE: C

DESCRIPTION:

NTM/SERV Include File Description

FILE NAME: APIINI
PURPOSE: FOR INITIATION PURPOSES
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

28 jan 84 : changes for longer ap name

NTM/SERV Include File Description

FILE NAME: APILCL
PURPOSE: THE APIS COMMON LOCAL DATA.
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

MODIFIED 8/24/83 TO UP THE SIZE OF MAX-IN-RCV-BUFFER FROM
10
TO 20.
MODIFIED TO ADD VALUES FOR SYSTEM COMMAND
CATEGORIES.

NTM/SERV Include File Description

FILE NAME: APINME
PURPOSE: **** PURPOSE NOT FOUND BY STRIPPER ****
LANGUAGE: C

DESCRIPTION:

PS 620342300
30 September 1990

NTM/SERV Include File Description

FILE NAME: BUFAPI
PURPOSE: **** PURPOSE NOT FOUND BY STRIPPER ****
LANGUAGE: C

DESCRIPTION:

NTM/SERV Include File Description

FILE NAME: COMAPC
PURPOSE: PROCESS ERROR INCLUDE FILE
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

NTM/SERV Include File Description

FILE NAME: ERRPRO
PURPOSE: PROCESS ERROR INCLUDE FILE
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

NTM/SERV Include File Description

FILE NAME: FILES:
PURPOSE: AS THE RETURN GIVEN A TABLE-FULL ERROR
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

MODIFIED 11/2/83 TO INCLUDE RET-CODE-5 *
MODIFIED 1/9/84 TO INCREASE ALL ERROR CODES TO PIC X(5) *
AND TO ELIMINATE ALPHA'S *
MODIFIED 1/26/84 TO ADD RET-CODE FOR GETUSR-NOT-SUCC *
SRV-SUCCESSFUL ADDED FOR GENERIC RETURN *
MODIFIED 2/7/84 TO ADD ERROR CODES FOR ENTRY-NOT-FOUND *
MODIFIED 2/8/84 TO ADD WTHST-NOT-SUCCESSFUL *
MODIFIED 2/20/84 TO ADD TSTMOD NEW CODES. *

PS 620342300
30 September 1990

NTM/SERV Include File Description

FILE NAME: INICMD
PURPOSE: PROCESS ERROR INCLUDE FILE
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

NTM/SERV Include File Description

FILE NAME: MSGSTR
PURPOSE: PURPOSE
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

MODIFIED 9/23/83 TO IDENTIFY ERROR CODES AS RETURNED VIA
SNDSAP. NOTE - NO NACK IS SENT - ALSO
CHANGED RESOURCE-FULL VALUE TO 33.
MODIFIED 10/06/83 TO ADD VALUE FOR SYSTEM STATE MESSAGE.
MODIFIED 11/22/83 RESTORED FROM HARD COPY.
MODIFIED 1/12/84 TO HANDLE FIVE CHAR ERROR CODE.
MODIFIED 1/30/84 FOR EXPANDED AP NAME.
MODIFIED 2/08/84 TO RECOGNIZE "J" AS A PAIRED MESSAGE.
MODIFIED 8/20/84 INITIALIZE ALL LOCAL VARIABLES TO SPACES
OR 0
MODIFIED 9/20/84 ADDED IBM NAMES TO NTMNAME. BCS APM
MODIFIED 5/24/85 CLEAN-UP.

NTM/SERV Include File Description

FILE NAME: OF
PURPOSE: AS THE RETURN GIVEN A TABLE-FULL ERROR
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

MODIFIED 11/2/83 TO INCLUDE RET-CODE-5	*
MODIFIED 1/9/84 TO INCREASE ALL ERROR CODES TO PIC X(5)	*
AND TO ELIMINATE ALPHA'S	*
MODIFIED 1/26/84 TO ADD RET-CODE FOR GETUSR-NOT-SUCC	*
SRV-SUCCESSFUL ADDED FOR GENERIC RETURN	*
MODIFIED 2/7/84 TO ADD ERROR CODES FOR ENTRY-NOT-FOUND	*
MODIFIED 2/8/84 TO ADD WTHST-NOT-SUCCESSFUL	*
MODIFIED 2/20/84 TO ADD TSTMOD NEW CODES.	*

NTM/SERV Include File Description

FILE NAME: RETSTR
PURPOSE: THE APIs COMMON LOCAL DATA FOR ERROR-RETURNS.
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

MODIFIED 8/20/84 INITIALIZE ALL LOCAL VARAIBLES TO SPACES
OR 0
MODIFIED 5/24/85 CLEAN-UP.

NTM/SERV Include File Description

FILE NAME: SRVCD2
PURPOSE: THAT CALL NSEND AND RCV
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

NTM/SERV Include File Description

FILE NAME: SRVCDS
PURPOSE: SERVICE CODES FOR THE NTM SERVICE ROUTINES.
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

MODIFIED 10/06/83 TO INCLUDE INITEX-RES-NOT-Avail.
MODIFIED 11/02/83 TO INCLUDE WTHST- CODES.
MODIFIED 1/09/84 TO CHANGE ERROR CODES TO PIC X(5) AND TO
ELIMINATE ALPHA CHARACTERS.
MODIFIED 1/26/84 TO ADD SERVICE-SUCCESS (GENERIC) AND
GETUSR-NOT-SUCCESSFUL.
MODIFIED 2/07/84 TO ADD ERROR CODES FOR ENTRY-NOT-FOUND.
MODIFIED 5/24/85 CLEAN-UP.

NTM/SERV Include File Description

FILE NAME: SRVRET
PURPOSE: AS THE RETURN GIVEN A TABLE-FULL ERROR
LANGUAGE: VAX-11 COBOL

DESCRIPTION:

MODIFIED 11/2/83 TO INCLUDE RET-CODE-5 *
MODIFIED 1/9/84 TO INCREASE ALL ERROR CODES TO PIC X(5) *
AND TO ELIMINATE ALPHA'S *
MODIFIED 1/26/84 TO ADD RET-CODE FOR GETUSR-NOT-SUCC *
SRV-SUCCESSFUL ADDED FOR GENERIC RETURN *
MODIFIED 2/7/84 TO ADD ERROR CODES FOR ENTRY-NOT-FOUND *
MODIFIED 2/8/84 TO ADD WTHST-NOT-SUCCESSFUL *
MODIFIED 2/20/84 TO ADD TSTMOD NEW CODES. *

NTM/SERV Include File Description


FILE NAME: TSTMDE
PURPOSE: SPACES OR 0.
LANGUAGE: VAX-11 COBOL


DESCRIPTION:


3.10.10 Hierarchy Chart


The following hierarchy charts show the relationships between all of the modules mentioned in the above documentation. A module may call a subroutine several times within its code, but the call will only be shown once as a single relationship on this hierarchy chart. All modules shown at the top of the first page are considered Main Programs as described in section 3.10.1 above.


There is an internal paging scheme as marked by the numbers in the upper right corner of each page. An index after the last page of the chart shows where a routine and its calls are first defined. If a routine has no page reference, it either makes no calls or is an external routine. A continuation box on the end of a tree limb shows where that the tree continues on the page number mentioned. A number in a box with a routine name points to the page where the routine is further defined within the hierarchy tree. If there is no number in a box, the routine either makes no calls or is an external routine.

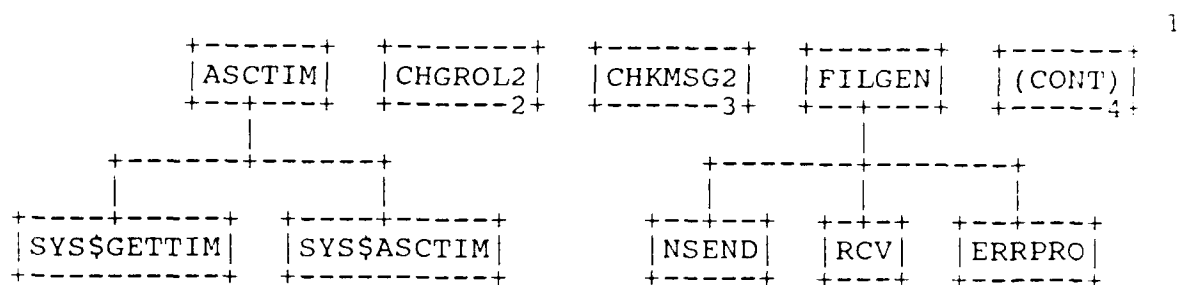


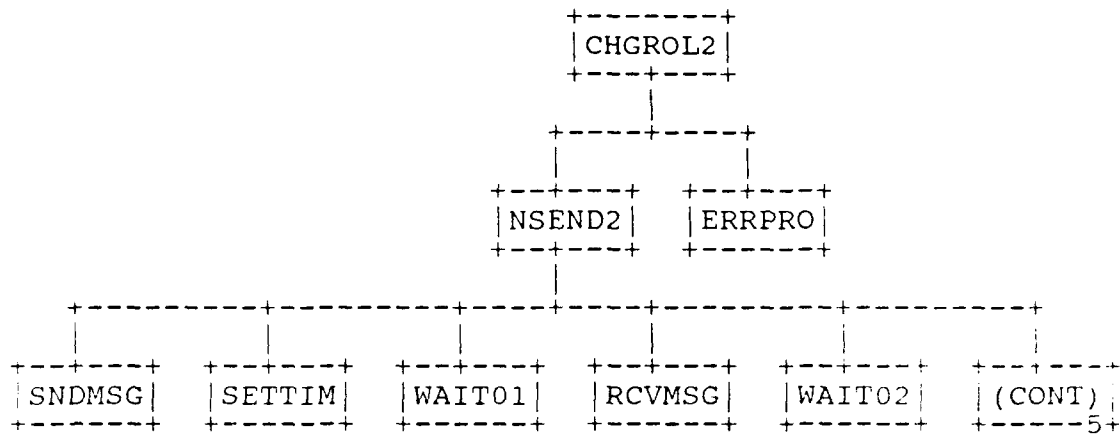

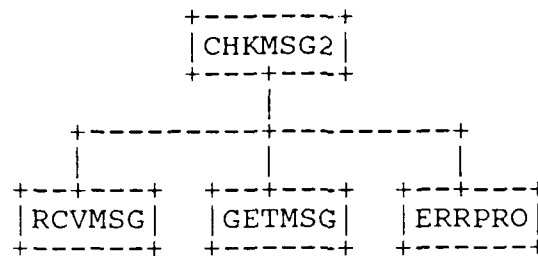

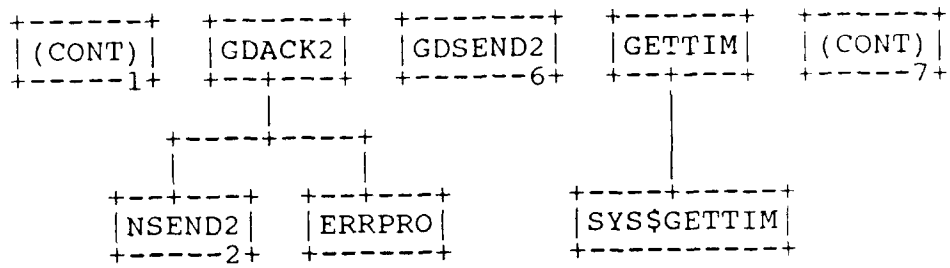

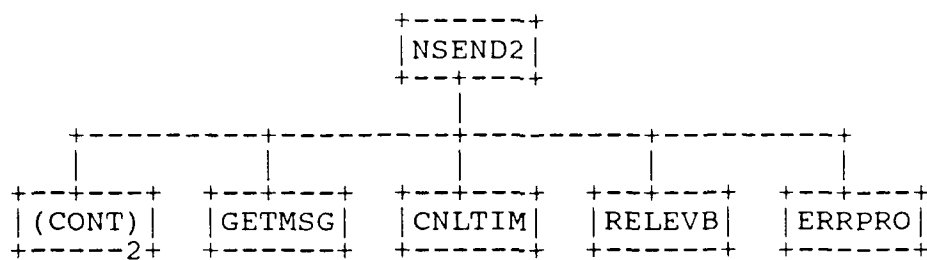


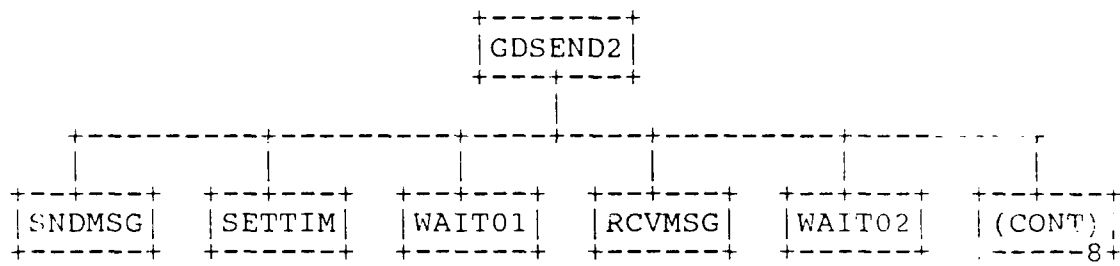



PS 620342300
30 September 1990


7

+-----+	+-----+	+-----+	+-----+	+-----+
(CONT)	GETUSR2	INICOM2	INITIAL2	(CONT)
+-----4+	+-----9+	+-----10+	+-----11+	+-----12+

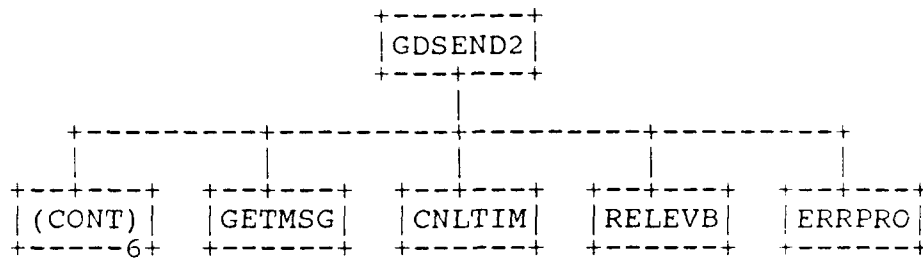


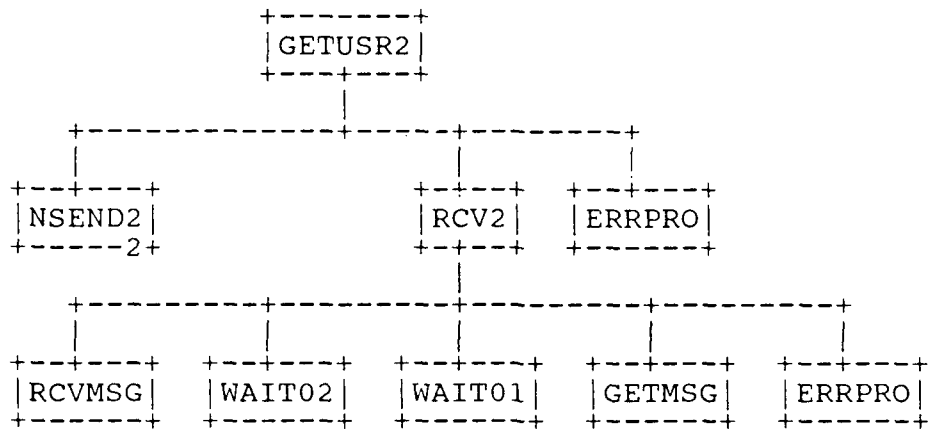


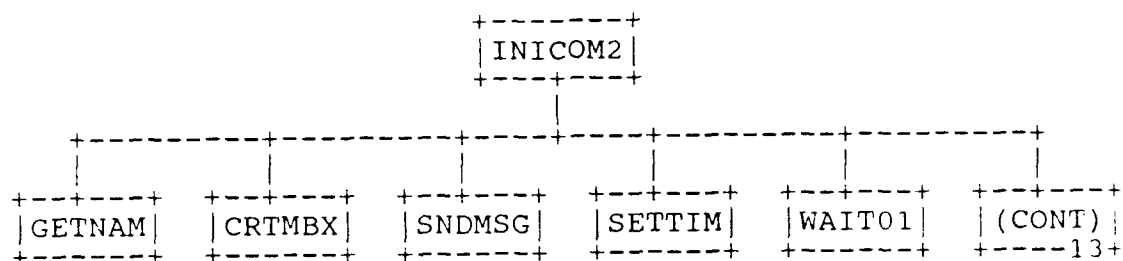


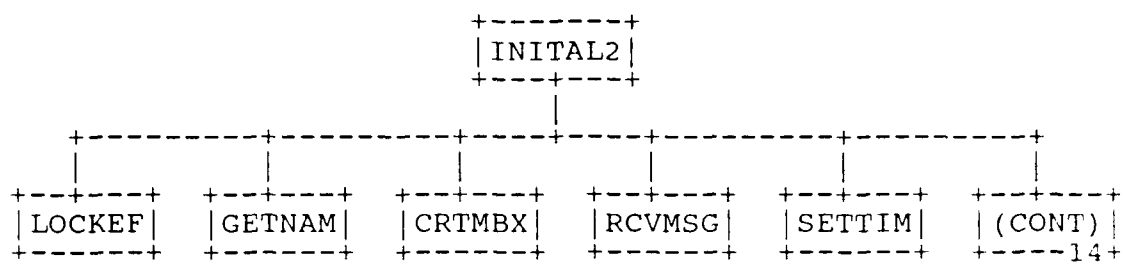


+-----+	+-----+	+-----+	+-----+	+-----+
(CONT)	INITEX2	INITIL2	ISEND2	(CONT)
+-----7+	+-----15+	+-----16+	+-----17+	+-----18+

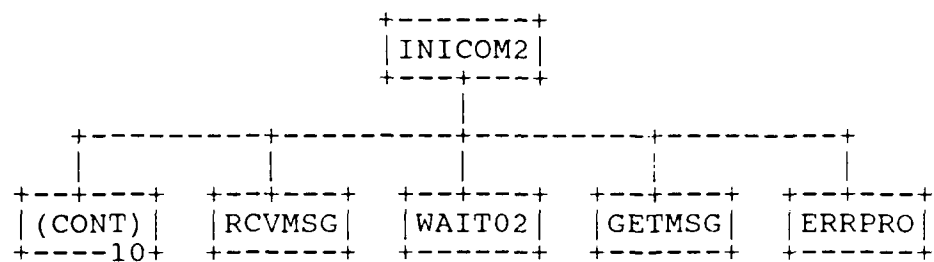


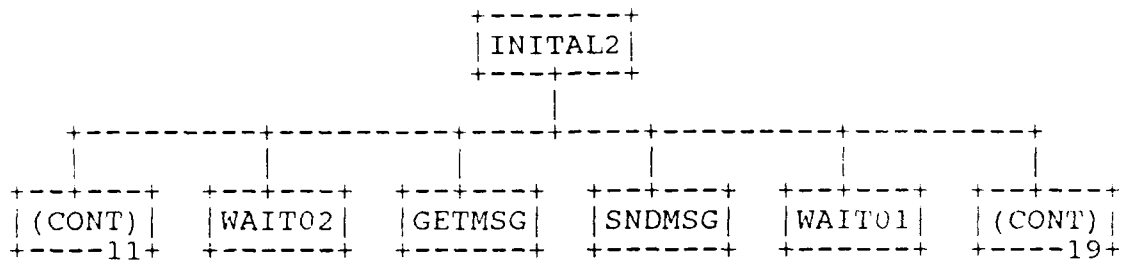

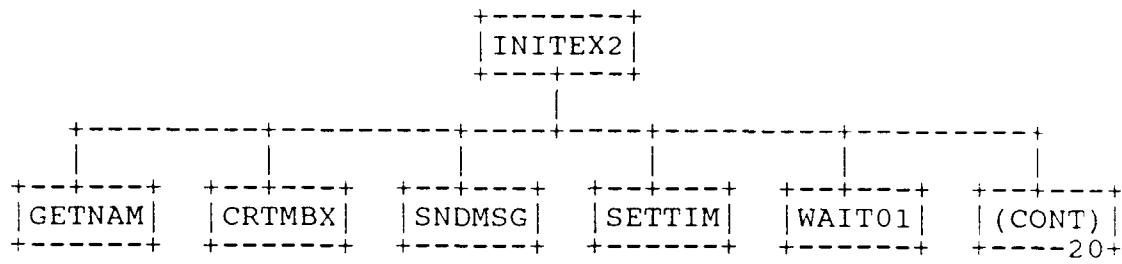


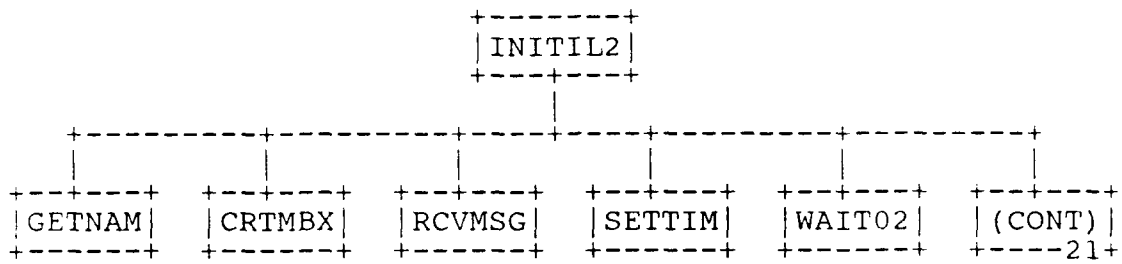


17

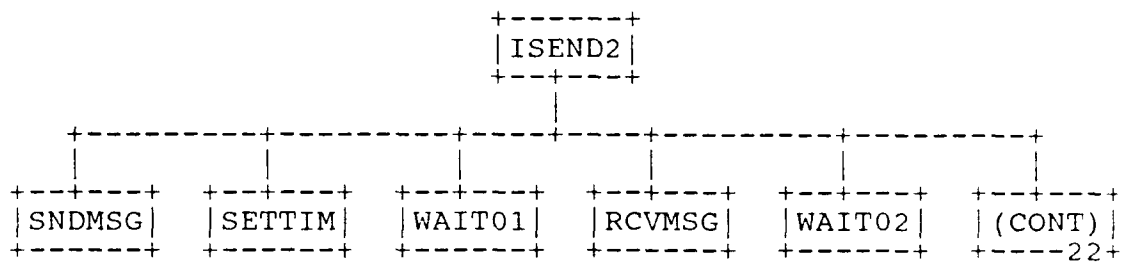



18

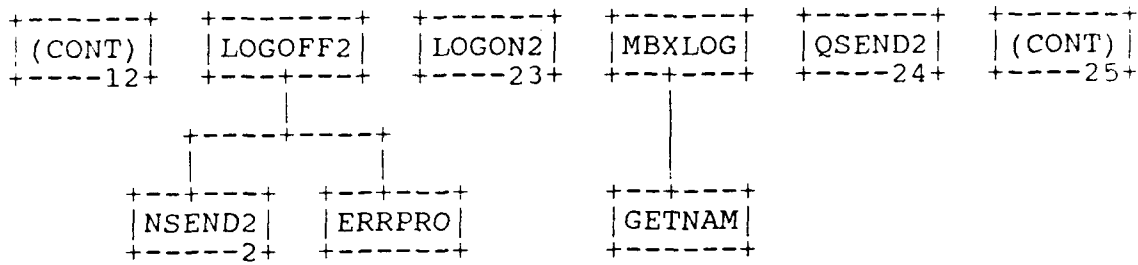



```
      +-----+
      | INITIAL2 |
      +-----+
        |
+-----+-----+-----+-----+
|         |         |         |         |
+-----+ +-----+ +-----+ +-----+
| (CONT) | | DELMBX | | RELEV B | | ERRPRO |
+-----+ +-----+ +-----+ +-----+
      14
```

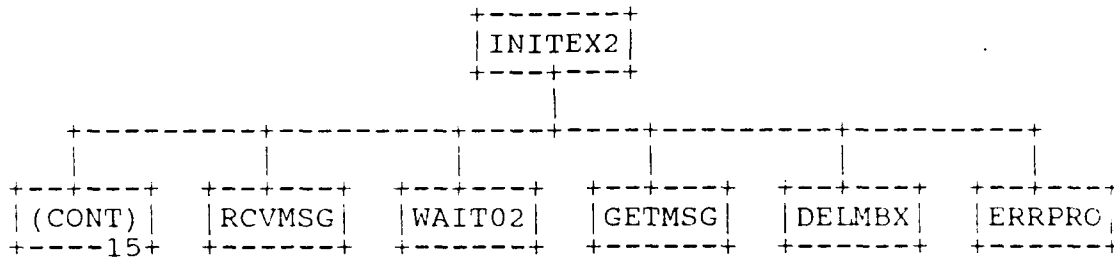

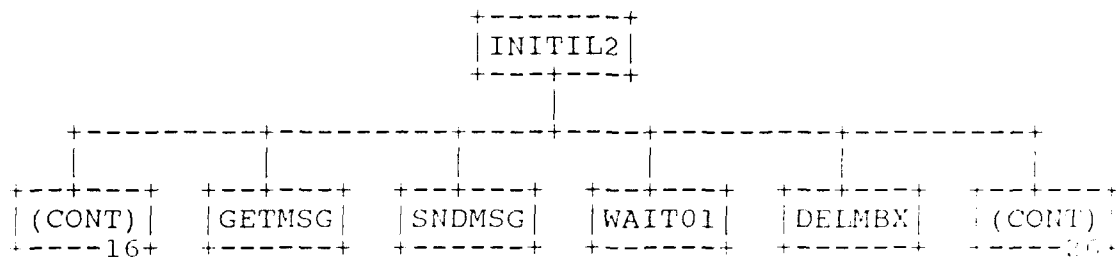


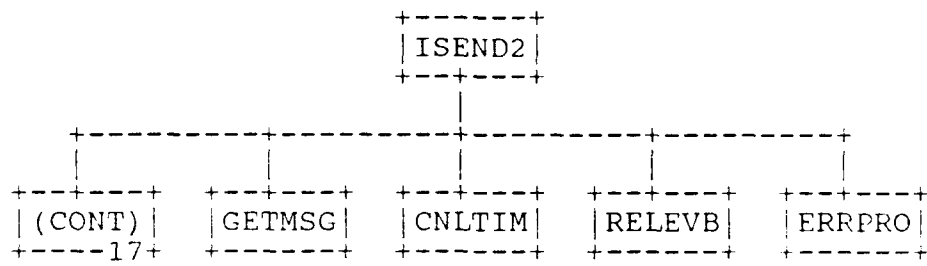


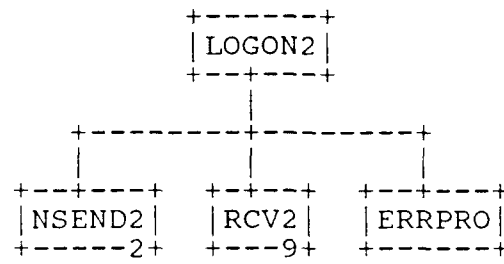

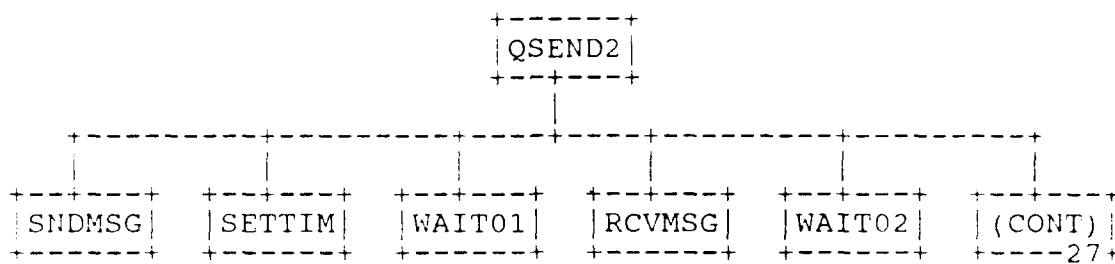



25

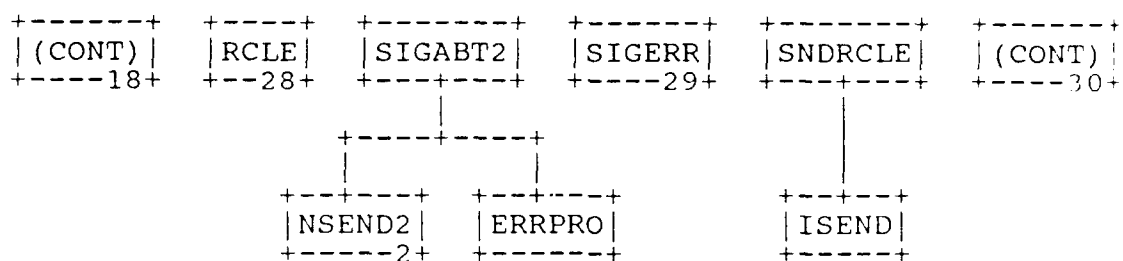

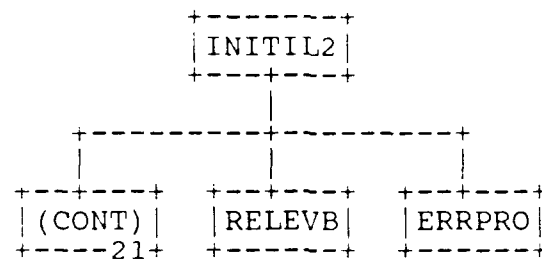


27

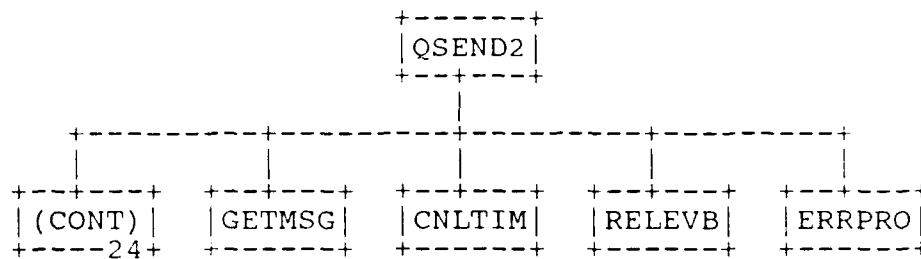


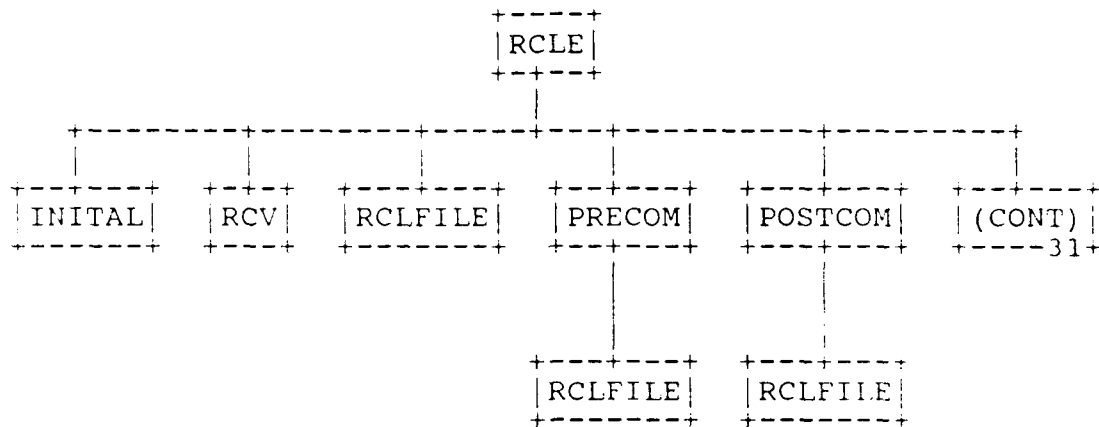



29

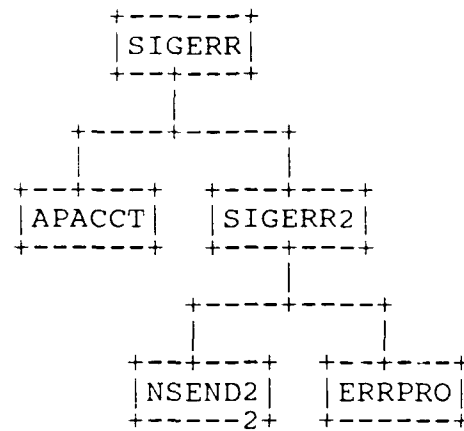



30

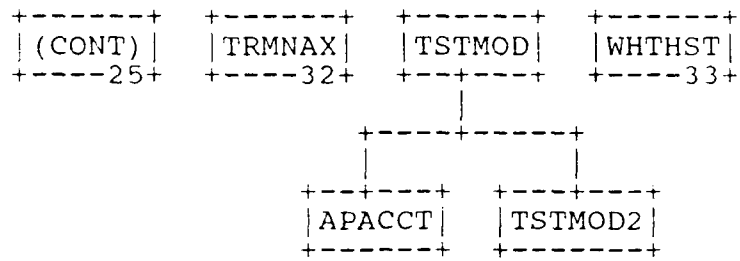


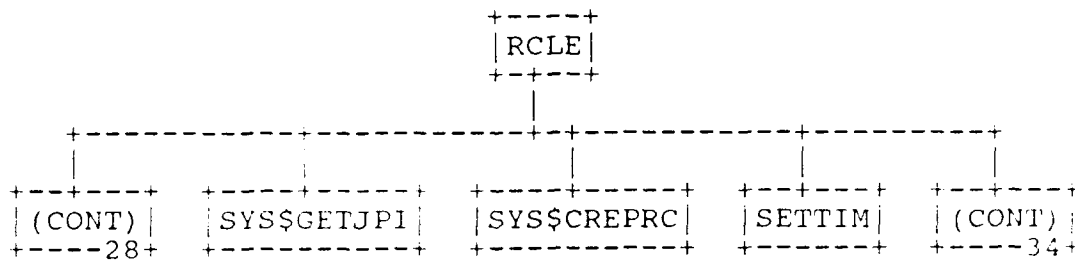


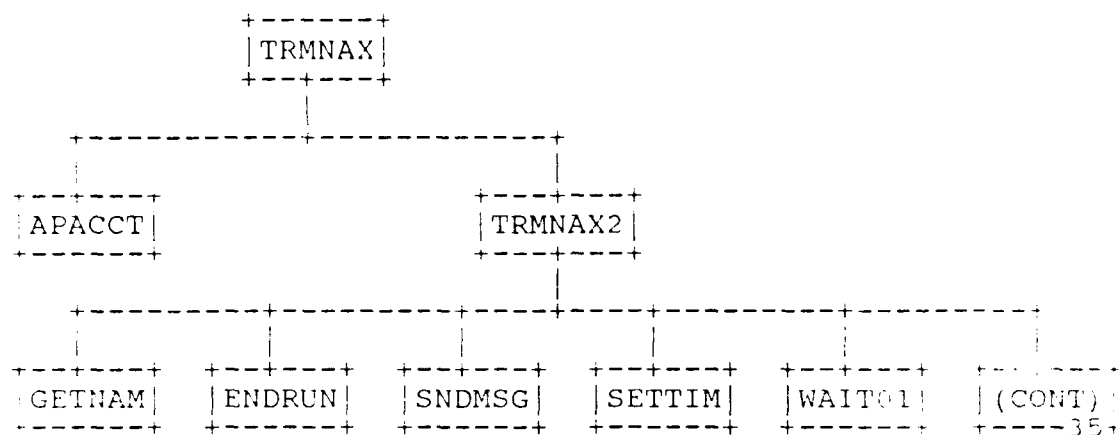


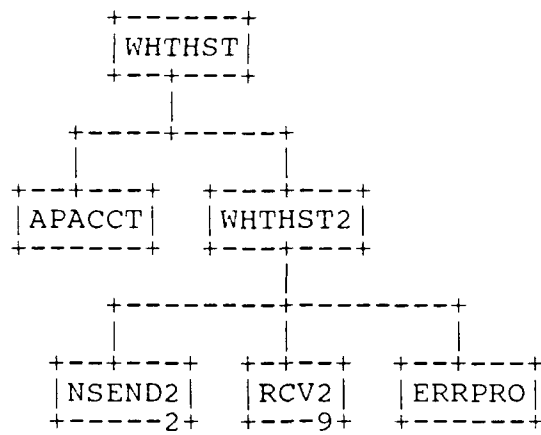

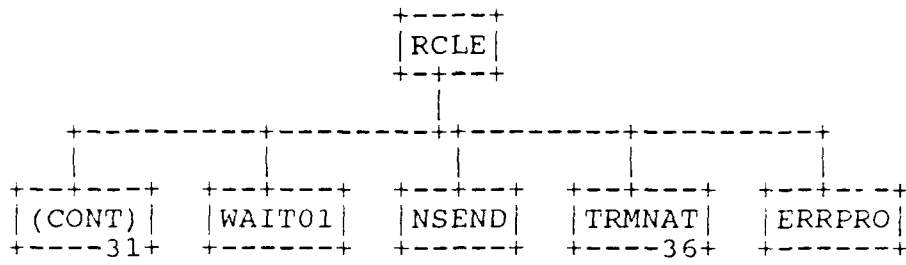

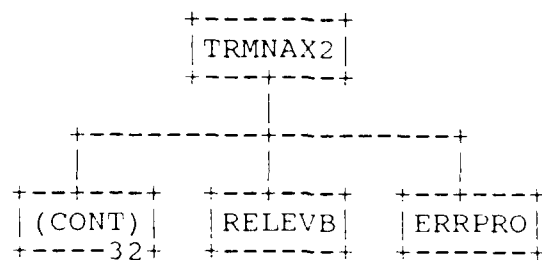

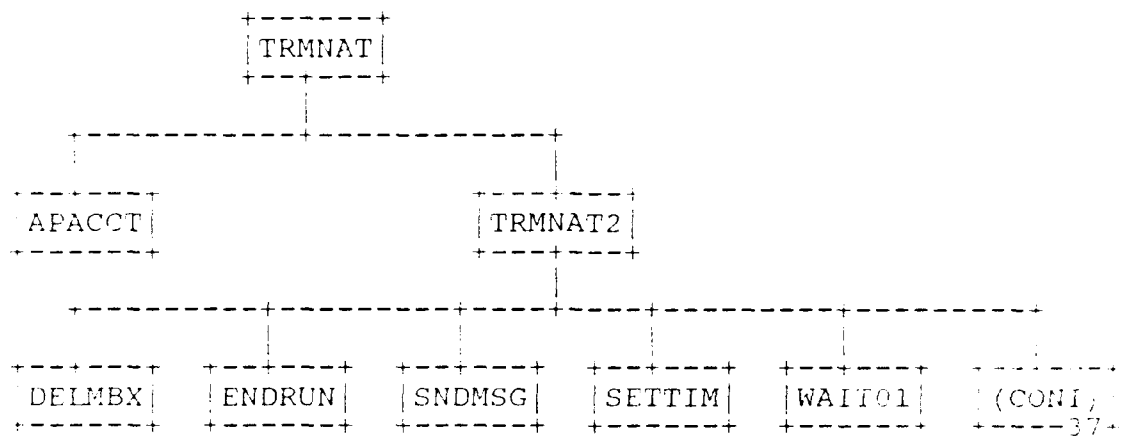

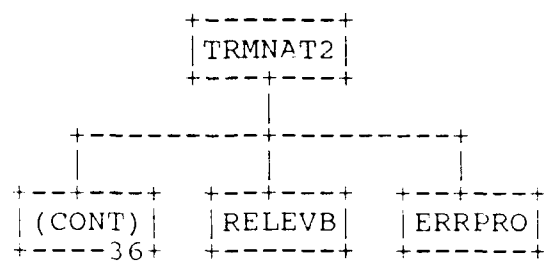

APACCT		SYS\$GETTIM	
ASCTIM.....1		TRMNAT.....36	
CHGROL2.....2		TRMNAT2.....36	
CHKMSG2.....3		TRMNAX.....32	
CNLTIM		TRMNAX2.....32	
CRTMBX		TSTMOD.....30	
DELMBX		TSTMOD2	
ENDRUN		WAIT01	
ERRPRO		WAIT02	
FILGEN.....1		WHTHST.....33	
GDACK2.....4		WHTHST2.....33	
GDSEND2.....6			
GETMSG			
GETNAM			
GETTIM.....4			
GETUSR2.....9			
INICCN2.....10			
INITAL			
INITAL2.....11			
INITEX2.....15			
INITIL2.....16			
ISEND			
ISEND2.....17			
LOCKEF			
LOGOFF2.....18			
LOGON2.....23			
MBXLOG.....18			
NSEND			
NSEND2.....2			
POSTCOM.....28			
PRECOM.....28			
QSEND2.....24			
RCLE.....28			
RCLEFILE			
RCV			
RCV2.....0			
RELEVB			
RELEVB			
SELIIM			
SIGABT2.....25			
SIGERR.....29			
SIGERR2.....29			
SENDSG			
SENDRCLE.....25			
SYS\$ASCTIM			
SYS\$CREPRC			
SYS\$GETUPI			

3.11 Program Listings Comments

This information is contained in the Module Descriptions in section 3.10.

SECTION 4

QUALITY ASSURANCE PROVISIONS

4.1 Introduction and Definitions

"Testing" is a systematic process that may be preplanned and explicitly stated. Test techniques and procedures may be defined in advance and a sequence of test steps may be specified. "Debugging" is the process of isolation and correction of the cause of an error.

"Antibugging" is defined as the philosophy of writing programs in such a way as to make bugs less likely to occur and when they do occur, to make them more noticeable to the programmer and the user. In other words, as much error checking as is practical and possible in each routine should be performed.

4.2 Computer Programming Test and Evaluation

The quality assurance provisions for test consists of the normal testing techniques that are accomplished during the construction process. They consist of design and code walk-throughs, unit testing, and integration testing. These tests are performed by the design team. Structured design, design walk-through and the incorporation of "antibugging" facilitate this testing by exposing and addressing problem areas before they become coded "bugs".