

ARMY RESEARCH LABORATORY



Flame Structure Studies of Neat and NH_3 -Doped Low-Pressure $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ Flames by Molecular Beam Mass Spectroscopy

by R. C. Sausa, G. Singh,
G. W. Lemire, and W. R. Anderson

ARL-TR-1410

July 1997

DTIC QUALITY INSPECTED 4

19970721 033

Approved for public release; distribution is unlimited.

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer need. Do not return it to the originator.

Army Research Laboratory

Aberdeen Proving Ground, MD 21005-5066

ARL-TR-1410

July 1997

Flame Structure Studies of Neat and NH₃-Doped Low-Pressure H₂/N₂O/Ar Flames by Molecular Beam Mass Spectroscopy

R. C. Sausa, G. Singh, G. W. Lemire, W. R. Anderson
Weapons and Materials Research Directorate, ARL

Abstract

An experimental and chemical modeling study of neat and NH_3 -doped $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ flames is conducted in order to understand the fundamental mechanism for NO formation and destruction and to predict the efficacy of NH_3 on the rate of conversion of NO to N_2 . Species concentration and temperature profiles are measured with molecular-beam-mass spectrometer and thin-wire thermocouple, respectively. Species profiled include H_2 , N_2O , NH_3 , N_2 , NO, and Ar. The experimental mole fractions are compared to both equilibrium and one-dimensional premixed laminar flame code (PREMIX) calculations. The PREMIX code employs a chemical mechanism consisting of 87 reactions and 20 species with rate constants obtained from a critical literature review. Equilibrium calculations are in very good agreement with both experimental and PREMIX calculations for N_2O , N_2 , and H_2O in the postflame region of both neat and doped flames, but underpredict the H_2 and NO mole fractions. The PREMIX profiles of the majority species agree very well with the experiment for the neat flame and reasonably well for the doped flame. A 55% reduction in the NO mole fraction for 4% dopant is predicted in the post-flame region, in good agreement with that observed experimentally. The flame calculations overpredict, however, the NH_3 mole fractions in the post-flame region, suggesting that refinements in the model are necessary. Rate and sensitivity analyses reveal that the decrease in NO mole fraction results from less NO formation by the reactions involving $\text{N}_2\text{O}+\text{H}$ and more of its consumption to N_2 by reactions involving $\text{NO}+\text{NH}_2$.

ACKNOWLEDGMENTS

We thank Drs. J. Vanderhoff, R. Pastel, D. Venizelos, and B. Homan of the U.S. Army Research Laboratory (ARL), Professor J. Bozzelli of the New Jersey Institute of Technology, and Dr. J. Miller of the Sandia National Laboratories (CRF) for many helpful discussions. Support from the ARL visiting summer Research Faculty Program (Professor G. Singh) and National Research Postdoctoral Research Associate Program (Dr. G. Lemine) is gratefully acknowledged. This work was supported by the ARL Combustion Research mission program, Strategic Environmental Research and Development Program (SERDP), Army-713-Cleanup, and in part by a grant of High Performance Computing (HPC) time from the Department of Defense (DOD) HPC Shared Resource Center, Corps of Engineers Waterways Engineering Station, Cray Y-MP8.

INTENTIONALLY LEFT BLANK.

TABLE OF CONTENTS

	<u>Page</u>
ACKNOWLEDGMENTS	iii
LIST OF FIGURES	vii
LIST OF TABLES	ix
1. INTRODUCTION	1
2. EXPERIMENTAL	1
3. MODELING/CHEMICAL MECHANISM	2
4. RESULTS/DISCUSSION	5
5. CONCLUSION	14
6. REFERENCES	17
DISTRIBUTION LIST	21
REPORT DOCUMENTATION PAGE	29

INTENTIONALLY LEFT BLANK.

LIST OF FIGURES

<u>Figure</u>	<u>Page</u>
1. Temperature profiles of a neat (Δ) and 4% NH_3 -doped (o), 30-torr $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ flame.	3
2. Calculated (—) and experimental H_2 (●), N_2O (o), H_2O (■), and N_2 (□) species profiles for a 30-torr $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ flame	6
3. Calculated (—) and experimental H_2 (●), N_2O (o), H_2O (□), and N_2 (■) species profiles for a 30-torr $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ flame doped with 4% NH_3	6
4. Calculated (—) and experimental NO profiles for both neat (●) and 4% NH_3 -doped (o) $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ flames, and experimental (▽) and calculated (—) NH_3 profiles for doped flame	8
5. Pathway diagram of a 30-torr, neat $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ flame generated by integrating the net rate fluxes of individual reactions from the burner surface to 13.75 mm . . .	11
6. Pathway diagram of a 30-torr, 4% NH_3 -doped $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ flame generated by integrating the net rate fluxes of individual reactions from the burner surface to 13.75 mm	12

INTENTIONALLY LEFT BLANK.

LIST OF TABLES

<u>Table</u>	<u>Page</u>
1. Reaction Mechanism Employed for Modeling Both Neat and NH_3 -Doped $\text{H}_2/\text{N}_2\text{O}$ Flames	4
2. Sensitivity Coefficients for NH_3 in NH_3 -Doped Flame at 13.75 mm Above the Burner Surface	9
3. Sensitivity Coefficients for NO in a Neat and NH_3 -Doped Flame at 13.75 mm Above the Burner Surface	13

INTENTIONALLY LEFT BLANK.

1. INTRODUCTION

An understanding of the way additives alter the chemical pathways in combustion systems is a prerequisite for controlling and enhancing system performance. In many systems, NO is a product of incomplete combustion whose formation prevents full energy release of the system. It is also known to cause the formation of a dark zone in the burning of solid propellants, which is undesirable [1], and, as an environmental pollutant, it poses problems in the incineration of aged propellants. Thus, it is of interest to investigate the incorporation of various additives in nitrogenous combustion systems for NO reduction. The $\text{H}_2/\text{N}_2\text{O}$ chemical system was chosen because it is fairly simple and has important implications in understanding NO_x pollutant formation and nitramine propellant combustion and decomposition. The elementary reactions of the system are a subset of larger mechanisms needed to understand the nitrogen chemistry of more complex combustion systems.

This report describes combined experimental and modeling flame-structure studies of neat and NH_3 -doped $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ flames in order to explore the role of the additive in converting NO to final products. NH_3 was selected as the additive because of its proven use in the thermal deNO_x process to remove NO from effluent streams of industrial furnaces [2]. The experimental mole fractions are compared with both equilibrium and one-dimensional premixed laminar flame code (PREMIX) calculations. Rate and sensitivity analyses of the PREMIX calculations reveal the mechanisms responsible for NO formation and consumption.

2. EXPERIMENTAL

The details of the experimental apparatus used in this study are discussed elsewhere [3, 4]. Briefly, a 30-torr $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ flame, generated by flowing H_2 , N_2O , and Ar at 1.78, 1.64, and 1.23 slpm, respectively, was stabilized on a 6-cm diameter flat-flame burner and doped with up to 7% NH_3 . Profiles of H_2 , N_2O , NH_3 , H_2O , N_2 , NO, and Ar were obtained by molecular-beam mass spectrometry (MBMS), and the species concentrations were determined by direct calibration at ambient temperature by a procedure previously reported [4]. For H_2O , the signals measured in

the flame were quantified by equating the ratio of N/O in the premixed gases to the ratio of N/O in the burnt gases and by assuming that the mole fractions of the radical species are comparatively small [5]. The errors associated with the absolute species concentrations were $\pm 10\%$. The OH, NH_2 , NH, and O radicals were not measured by MBMS because of the same mass-to-charge ratio and fragmentation-ionization interferences resulting from the addition of NH_3 . These species are, however, presently being measured by laser-induced fluorescence (LIF), and the results will be presented elsewhere.

Flame temperatures were measured with a Pt/Pt-Rh(10%) fine-wire thermocouple coated with a beryllium oxide (15%)/yttrium oxide mixture [6] and corrected for temperature-radiation losses using OH LIF [7]. The overall uncertainty of temperature measurements is ± 100 K in the region of the peak temperature.

The temperature data for both neat and NH_3 -doped $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ flames, measured near the quartz sampler and fit to a sigmoid-type function, are shown in Figure 1. The peak in the temperature profiles near the burner surface is an artifact produced by the quartz sampler since it is not present when the sampler is removed. (Temperature profiles without sampler are not shown.) Doping the neat flame with 4% of NH_3 results in approximately a 2-mm displacement of the temperature profile away from the burner surface, and approximately a 44-K drop in the peak temperature. The small drop in peak temperature is consistent with NASA-Lewis equilibrium calculations [8], which yield a difference in the adiabatic flame temperatures of only 9 K. In the post-flame region, the measured flame temperatures are nearly identical, approximately 1,822 K at 13.75 mm.

3. MODELING/CHEMICAL MECHANISM

The computations utilized the Sandia Laboratories PREMIX code (ver.2.5b) [9], which employs the CHEMKIN-II (ver. 3.0) library [10]. The calculations were performed with the fitted- temperature profiles used as input to PREMIX, the inclusion of both thermal diffusion and multicomponent transport package option, and with normal boundary conditions (i.e., no

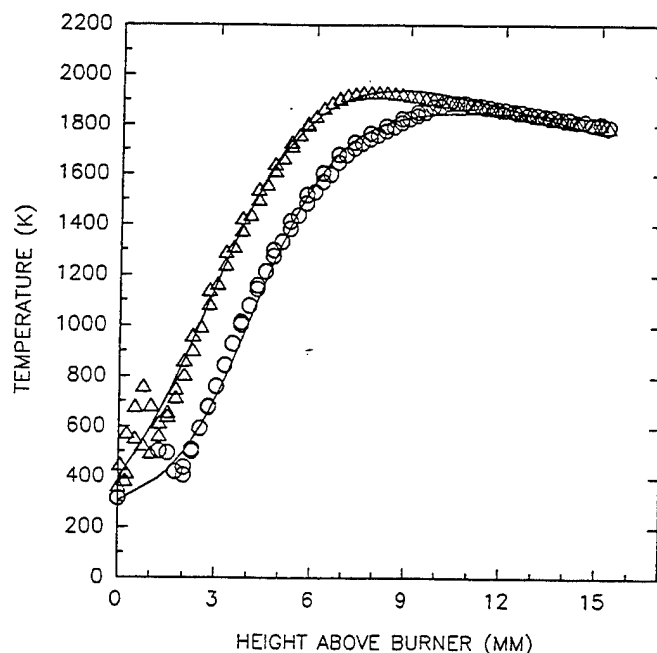


Figure 1. Temperature profiles of a neat (Δ) and 4% NH_3 -doped ($\circ$), 30-torr $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ flame. The solid line is a best fit of the data using a sigmoid-type function.

recombination of H atoms to H_2 via burner surface reaction was included). Prior work under conditions similar to those used here indicates that inclusion of this recombination effect only results in a minor change to the H and H_2 profiles very close to the burner surface [3]. Gridding parameters and calculational domain were checked to ensure that numerical errors due to resolution and hot boundary conditions were negligible. Transport and thermochemical databases [11, 12] developed at Sandia were used for these calculations with the exception of a few of the species' heats of formation. Values of $(\Delta H_f^\circ)_{298}$ for HNO , NH_2 , and NH were updated to 25.4, 45.2, and 85.3 kcal/mole, respectively [13, 14]. The program THERM [15] was used to refit these species' thermal data to the form used in CHEMKIN codes. Rate and sensitivity analyses were performed using an interactive postprocessing code written in-house.

The chemical mechanism and rate constants used for the flame calculations are presented in Table 1. The bulk of the reactions was obtained from the benchmark review of nitrogen chemistry in combustion by Miller and Bowman [16], which were updated for the $\text{H}_2/\text{N}_2\text{O}$ system [3, 4]. More recent updates include both rate constant [25] and efficiency factor

Table 1. Reaction Mechanism Employed for Modeling Both Neat and NH₃-Doped H₂/N₂O Flames (The Rate Coefficients Are in the Form $k=AT^B e^{(-E/RT)}$, Where A and E Have Units of cm-mol-s-K and cal/mol, Respectively)

REF.	REACTIONS	A	B	E	REF.	REACTIONS	A	B	E		
1	H2+O2=OH+OH	1.70E+13	0.00	47780.0	[16]	44	NH2+N=N2+H+H	7.20E+13	0.00	0.0	[16]
2	H2+OH=H2O+H	2.16E+08	1.51	3430.0	[17]	45	NH2+O2=HNO+OH	4.50E+12	0.00	25000.0	[16]
3	H2+O=H+OH	5.06E+04	2.67	6290.0	[18]	46	NH2+NH2=N2H2+H2	5.00E+11	0.00	0.0	[16]
4	H+H+H2=H2+H2	1.00E+17	-0.60	0.0	[19]	47	NH2+NH2=NH+NH3	5.00E+13	0.00	10000.0	[33]
5	H+H+H2O=H2+H2O	1.00E+19	-1.00	0.0	[19]	48	NH3+OH=NH2+H2O	2.04E+06	2.04	566.0	[16]
6	H+H+H=H2+H	3.20E+15	0.00	0.0	[19]	49	NH3+H=NH2+H2	5.42E+05	2.40	9917.0	[34]
7	H+H+AR=H2+AR	7.00E+17	-1.00	0.0	[19]	50	NH3+O=NH2+OH	9.40E+06	1.94	6460.0	[35]
8	H+H+N2=H2+N2	5.40E+18	-1.30	0.0	[19]	51	NH3+M=NH2+H+M	2.20E+16	0.00	93470.0	[33]
9	H+H+M=H2+M	1.00E+18	-1.00	0.0 ^a	[16]	52	NNH+NO=N2+HNO	5.00E+13	0.00	0.0	[16]
10	H+O2=OH+O	3.52E+16	-0.70	17070.0	[20]	53	NNH+H=N2+H2	1.00E+14	0.00	0.0	[16]
11	O2+H+M=HO2+M	3.61E+17	-0.72	0.0 ^a	[16]	54	NNH+OH=N2+H2O	5.00E+13	0.00	0.0	[16]
12	O+O+M=O2+M	1.89E+13	0.00	-1788.0	[16]	55	NNH+NH2=N2+NH3	5.00E+13	0.00	0.0	[16]
13	HO2+OH=H2O+O2	7.50E+12	0.00	0.0	[16]	56	NNH+NH=N2+NH2	5.00E+13	0.00	0.0	[16]
14	HO2+H=OH+OH	1.69E+14	0.00	874.0	[21]	57	NNH=N2+H	3.00E+08	0.00	0.0	[24]
15	HO2+H=H2+O2	6.63E+13	0.00	2126.0	[21]	58	NNH+M=N2+H+M	1.00E13	0.50	3060.0	[24]
16	HO2+O=OH+O2	1.40E+13	0.00	1073.0	[16]	59	NNH+O=N2+OH	1.70E16	-1.23	497.0	[24]
17	OH+OH=H2O+O	6.00E+08	1.30	0.0	[16]	60	NNH+O=NO+NH	3.30E14	-0.23	-1013.0	[24]
18	H+OH+M=H2O+M	2.20E+22	-2.00	0.0 ^a	[22]	61	HNO+OH=NO+H2O	1.30E+07	1.88	-960.0	[36]
19	H+O+M=OH+M	6.20E+16	-0.60	0.0 ^a	[16]	62	HNO+NH2=NH3+NO	2.00E+13	0.00	1000.0	[16]
20	N2O+H=OH+N2	2.53E+10	0.00	4550.0 ^b	[23]	63	HNO+HNO=N2O+H2O	3.63E-03	3.98	1190.0	[37]
		2.23E+14	0.00	16750.0 ^b	[23]	64	HNO+NO=N2O+OH	8.51E+12	0.00	29590.0	[38]
21	NNH+O=N2O+H	1.40E+14	-0.40	477.0	[24]	65	HNO+O=OH+NO	4.50E11	0.72	656.0	[32]
22	N2O+M=N2+O+M	5.97E+14	0.00	56640.0 ^a	[25]	66	N2H2+M=NNH+H+M	5.00E+16	0.00	50000.0 ^a	[16]
23	N2O+O=N2+O2	1.40E+12	0.00	10800.0	[26]	67	N2H2+H=NNH+H2	5.00E+13	0.00	1000.0	[16]
24	N2O+O=NO+NO	6.90E+13	0.00	26600.0	[27]	68	N2H2+O=NH2+NO	1.00E+13	0.00	0.0	[16]
25	NH+NO=N2O+H	2.94E+14	-0.40	0.0 ^b	[28]	69	N2H2+O=NNH+OH	2.00E+13	0.00	1000.0	[16]
		-2.16E+13	-0.23	0.0 ^b	[28]	70	N2H2+OH=NNH+H2O	1.00E+13	0.00	1000.0	[16]
26	NH+NO=N2+OH	2.16E+13	-0.23	0.0	[28]	71	N2H2+NH=NNH+NH2	1.00E+13	0.00	1000.0	[16]
27	NH+O2=NO+OH	7.60E+10	0.00	1530.0	[29]	72	N2H2+NH2=NH3+NNH	1.00E+13	0.00	1000.0	[16]
28	NH+O2=HNO+O	3.89E+13	0.00	17885.0	[29]	73	HNO+H=H2+NO	4.46E+11	0.72	655.0	[39]
29	NH+OH=HNO+H	2.00E+13	0.00	0.0	[16]	74	NO+N=N2+O	3.27E+12	0.30	0.0	[16]
30	NH+OH=N+H2O	5.00E+11	0.50	2000.0	[16]	75	NO+M=N+O+M	1.40E+15	0.00	148430.0	[40]
31	NH+N=N2+H	3.00E+13	0.00	0.0	[16]	76	NO+H+M=HNO+M	9.00E+19	-1.30	735.0	[40]
32	N+H2=NH+H	1.60E+14	0.00	25140.0	[30]	77	NO+H=N+OH	1.70E+14	0.00	48801.0	[27]
33	NH+O=NO+H	5.50E+13	0.00	0.0	[29]	78	NO+O=N+O2	3.80E+09	1.00	41370.0	[40]
34	NH+O=N+OH	3.72E+13	0.00	0.0	[29]	79	NH2+NH2=N2H3+H	1.79E+13	-0.35	11320.0	[32]
35	NH+NH=N2+2H	5.10E+13	0.00	0.0	[31]	80	NH2+NH2+M=N2H4+M	2.98E+47	-9.44	9680.0	[32]
36	NH+M=N+H+M	2.65E+14	0.00	75514.0	[31]	81	N2H4+H=N2H3+H2	7.05E+12	0.00	2500.0	[41]
37	NH2+O=HNO+H	4.60E+13	0.00	0.0	[32]	82	N2H4+OH=N2H3+H2O	3.00E+10	0.68	1290.0	[42]
38	NH2+O=NH+OH	7.00E+12	0.00	0.0	[32]	83	N2H4+O=N2H3+OH	2.00E+13	0.00	1000.0	[42]
39	NH2+OH=NH+H2O	4.00E+06	2.00	1000.0	[16]	84	N2H3+M=N2H2+H+M	1.20E+13	0.00	58000.0	[42]
40	NH2+H=NH+H2	4.00E+13	0.00	3650.0	[33]	85	N2H3+H=N2H2+H2	1.00E+12	0.50	2000.0	[42]
41	NH2+NO=NNH+OH	6.40E+15	-1.25	0.0	[16]	86	N2H3+OH=N2H2+H2O	3.00E+10	0.68	1290.0	[42]
42	NH2+NO=N2+H2O	6.20E+15	-1.25	0.0	[16]	87	N2H3+O=N2H2+OH	2.00E+13	0.00	1000.0	[42]
43	NH2+NH=N2H2+H	1.50E+15	-0.50	0.0	[33]						

^a Third body efficiencies.

R9. H₂/0.0/H₂O/0.0/H₂O/0.0/Ar/0.0/N₂/0.0

R11. N₂/1.3/H₂O/18.6/H₂/2.9

R18. Ar/0.38/H₂O/63

R19. H₂/0.5/0

R22. N₂/0.5/H₂O/7.5/N₂/1.0/O₂/82/Ar/0.67

R66. H₂/0.15/O₂/2.0/N₂/2.0/H₂/2.0

^b For the indicated reactions the rate coefficient is computed as the sum of the two exponential expressions given for each.

($M=H_2O$) [43] for the sensitive reaction $N_2O+M=N_2+O+M$ (R22). Recent results of Hanson and coworkers for many important reactions involving NH_x species that were previously poorly quantified have also been incorporated [29–31, 33]. Finally, the reaction $OH+N_2O=HO_2+N_2$ was not included in the mechanism since recent experimental [3, 43, 44] and theoretical [45] studies indicate it is too slow to be of importance.

4. RESULTS/DISCUSSION

The experimental and predicted mole fractions of H_2 , N_2 , H_2O , and N_2O for the neat $H_2/N_2O/Ar$ flame are presented in Figure 2. Also presented are species profiles generated by increasing the temperature profile by a factor of 1.05, the experimental uncertainty. The computed profiles accurately model the experimental results throughout the entire flame for the neat flame. Quantitatively, the calculated mole fractions agree well with those measured experimentally, particularly in the post-flame region. NASA-Lewis calculations performed using a temperature of 1,822 K yield equilibrium mole-fraction values of 0.351 for N_2 and H_2O and 0.0 for N_2O , which are also in good agreement with the experimental mole fractions at 13.75 mm. The calculated H_2 equilibrium value of 0.0313 is, however, a factor of 2 smaller than the experimental value, indicating incomplete reaction.

Figure 3 shows the experimental and calculated mole-fraction profiles of the major species for the NH_3 -doped flame. Species profiles generated by increasing the experimental temperature profile by the experimental uncertainty are also presented. Both the experimental and modeled profiles are shifted away from the burner compared to their positions in the neat flame. The result follows the trend in temperature profiles (Figure 1). For the doped flame, the modeled profiles are shifted approximately 2 mm further away from the burner surface compared to those measured, indicating that the overall chemical reaction rates in the model are too slow. The experimental and calculated mole-fraction values for H_2 , H_2O , and N_2 agree reasonably well, while the N_2O profile is overpredicted by the model. As in the neat flame, equilibrium mole-

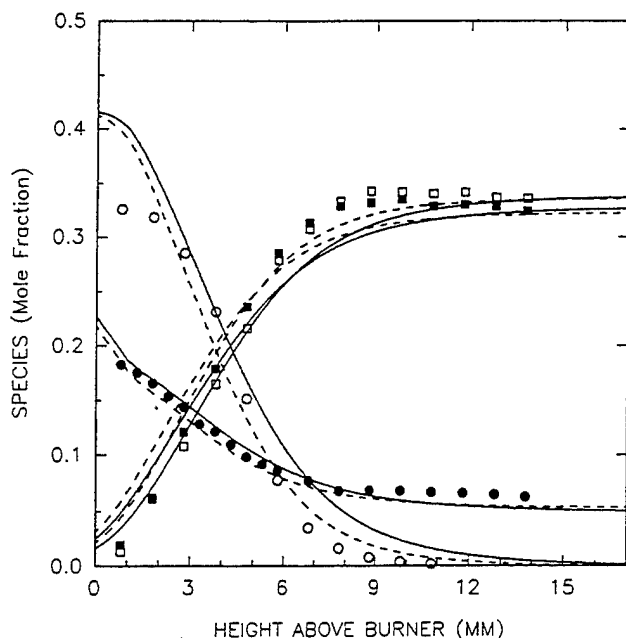


Figure 2. Calculated (—) and experimental H_2 (●), N_2O (○), H_2O (■), and N_2 (□) species profiles for a 30-torr $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ flame. The dashed curves are calculated profiles generated by increasing the temperature profile by a factor of 1.05, the experimental uncertainty.

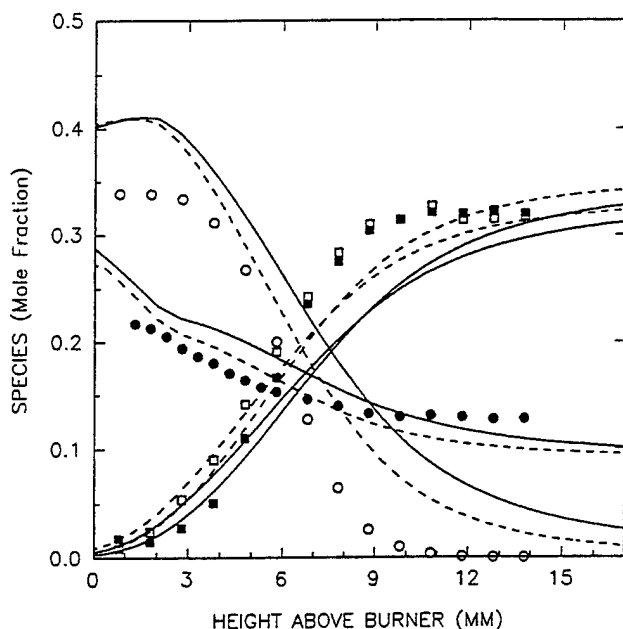


Figure 3. Calculated (—) and experimental H_2 (●), N_2O (○), H_2O (□), and N_2 (■) species profiles for a 30-torr $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ flame doped with 4% NH_3 . The dashed curves are calculated profiles generated by increasing the temperature profile by a factor of 1.05, the experimental uncertainty.

fraction values for N_2 , H_2O , and N_2O are in good agreement with the experimental values at 13.75 mm. The equilibrium H_2 mole fraction is, however, a factor of 1.4 lower than the experimental value.

The calculated and experimental NO mole-fraction profiles for both the neat and NH_3 -doped flames are shown in Figure 4. Quantitatively, excellent agreement between model and experiment is obtained in the post-flame region. The addition of 4% NH_3 reduces the NO concentration by approximately 45%, an effect predicted well by the model. Also, a leveling-off of the reduction efficiency was observed experimentally for NH_3 concentrations greater than approximately 6%. A 5% increase in the temperature profile inputted to the model resulted in approximately a 15 and 20% increase in the calculated NO mole fraction for neat and doped flames, respectively. As shown in Figure 4, the model and experimental NO profile shapes are similar. However, the modeled NO profile for the doped flame peaks at 9 mm and gradually decreases thereafter, in contrast to the experimental profile that plateaus at 9–10 mm. This discrepancy is related to an overprediction of NH_3 in the post-flame region by the model, which will be discussed in the following paragraph. Results of equilibrium calculations for NO at 13.75 mm are three orders of magnitude lower than both PREMIX and experimental values, indicating that NO in the post-flame region is well above its equilibrium concentration.

Also presented in Figure 4 are the experimental and calculated mole-fraction profiles of NH_3 for the doped flame. (The NH_3 mole fraction in the neat flame is negligibly small.) The modeled profile represented by the solid line strongly overpredicts the NH_3 mole fraction in the burnt gases. Equilibrium calculations predict the NH_3 mole fraction to be negligible at 13.75 mm, as observed experimentally. Also shown in Figure 4 are modeled profiles of NH_3 for (1) a 5% increase in the entire temperature profile, and (2) an assumed area expansion coefficient of 0.25 cm^{-1} as well as a 5% increase in the temperature profile. The profile generated with the latter conditions is in close agreement with the experimental profile in the lower part of the flame, but still overpredicts the experimental profile at distances greater than 6 mm. Although visual inspection indicated the expansion coefficient was no larger than 0.25 cm^{-1} , values of 0.50 and 1.00 cm^{-1} were also tried in the model. In all cases, the predicted NH_3 concentration in

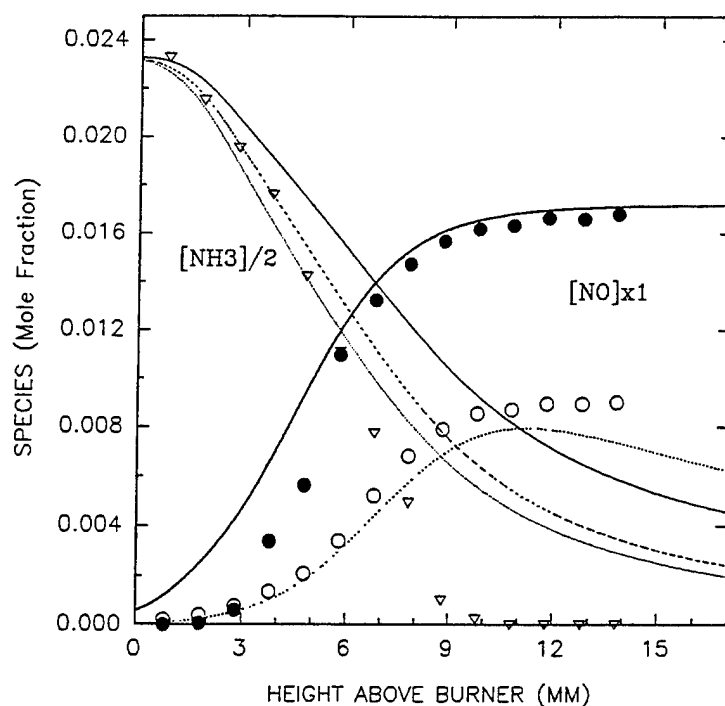


Figure 4. Calculated (—) and experimental NO profiles for both neat (●) and 4% NH₃-doped (○) H₂/N₂O/Ar flames, and experimental (▽) and calculated (—) NH₃ profiles for doped flame. The experimental NH₃ profile is normalized to that which is calculated. Also shown are NH₃ PREMIX profiles generated by (a) increasing the measured temperature profile by 5% (---) and (b) increasing the temperature profile by 5% and using $A = 1 + 0.25x$ for the area expansion term, where x is the distance from the burner surface (...). The pressure was maintained at 30 torr.

the burnt gases was far above that permitted by experimental limits. A factor of 10 reduction in the NH₃ mole fraction was obtained, however, by altering simultaneously the rate coefficients of the ten most sensitive reactions for NH₃ (see Table 2) by a factor of two in the direction that the analysis indicated would reduce the predicted NH₃ burnt gas mole fraction. However, making these changes simultaneously is rather drastic and quite unlikely to be correct since the resulting rate constants are close to or exceed the error limits for most of the reactions. The result is still far higher than the experimental limits will allow, particularly at 12–14 mm. Reaction flux analysis in the burnt gases (not shown) demonstrates conclusively that this overpredicted NH₃ mole fraction is the cause of the predicted NO profile decay in the burnt gases, which, as mentioned previously, disagrees with the experiment. In the model, NH₃ in this region reacts to

Table 2. Sensitivity Coefficients for NH_3 in NH_3 -Doped Flame at 3.75 mm Above the Burner Surface

REACTION		SENSITIVITY COEFFICIENTS (Rel.)	
		Sign	Doped ^a
22	$\text{N}_2\text{O}+\text{M}=\text{N}_2+\text{O}+\text{M}$	(-)	100.0
20	$\text{N}_2\text{O}+\text{H}=\text{OH}+\text{N}_2$	(+)	62.6
43	$\text{NH}_2+\text{NH}=\text{N}_2\text{H}_2+\text{H}$	(-)	36.2
48	$\text{NH}_3+\text{OH}=\text{NH}_2+\text{H}_2\text{O}$	(-)	32.7
2	$\text{H}_2+\text{OH}=\text{H}_2\text{O}+\text{H}$	(+)	22.1
41	$\text{NH}_2+\text{NO}=\text{NNH}+\text{OH}$	(-)	16.0
25	$\text{NH}+\text{NO}=\text{N}_2\text{O}+\text{H}$	(-)	14.7
60	$\text{NNH}+\text{O}=\text{NO}+\text{NH}$	(-)	12.9
32	$\text{N}+\text{H}_2=\text{NH}+\text{H}$	(+)	11.6
29	$\text{NH}+\text{OH}=\text{HNO}+\text{H}$	(+)	10.7
40	$\text{NH}_2+\text{H}=\text{NH}+\text{H}_2$	(-)	8.8
66	$\text{N}_2\text{H}_2+\text{M}=\text{NNH}+\text{H}+\text{M}$	(-)	8.7
49	$\text{NH}_3+\text{H}=\text{NH}_2+\text{H}_2$	(+)	7.9
44	$\text{NH}_2+\text{N}=\text{N}_2+\text{H}+\text{H}$	(-)	7.3
67	$\text{N}_2\text{H}_2+\text{H}=\text{NNH}+\text{H}_2$	(+)	6.7
77	$\text{NO}+\text{H}=\text{N}+\text{OH}$	(+)	6.4
37	$\text{NH}_2+\text{O}=\text{HNO}+\text{H}$	(+)	4.2
26	$\text{NH}+\text{NO}=\text{N}_2+\text{OH}$	(+)	4.1
76	$\text{NO}+\text{H}+\text{M}=\text{HNO}+\text{M}$	(-)	4.0

^a Logarithmically normalized [3] to 100 for the sensitivity coefficient of reaction 22 (-0.6993).

produce NH_x molecules (primarily NH_2) that continue to reduce the NO resulting in the decaying trend seen in Figure 4.

It should be noted that the choice of branching ratio for the NH_2+NO reaction (R41 and 42), a well-known subject of controversy, has little effect on the computed profiles. Tests have conclusively proven that the computed profiles are sensitive only to the total rate coefficient, not to the ratio. The tests were performed by adding the two rate coefficient expressions and then using the resulting rate coefficient for one of the two channels while removing the other. Under the current high-temperature conditions, $\text{N}_2\text{O}+\text{M}$ (R22) is the primary radical source and NH_2+NO provides comparatively few radicals. In contrast, under the lower temperature thermal

deNO_x conditions, the chain-branching reaction R41 must be included to provide a radical source to sustain the overall reaction [16].

Figure 5 is a reaction pathway diagram depicting the nitrogen chemistry occurring in the neat H₂/N₂O/Ar flame. The numbers in parentheses are the relative integrated rates (0–13.75 mm) of the various reactions normalized to 100 (4.428×10^{-6} mole/cm² s) for the reaction NH₃+OH=NH₂+H₂O in the doped flame. As seen from Figure 5, the reaction N₂O+H=N₂+OH represents the fastest step consuming N₂O to generate N₂. The reaction N₂O+M=N₂+O+M is also important. NO is formed predominantly from the reaction N₂O+H=NO+NH. The formation of NO from NH, via the HNO intermediate, and reaction N+OH=NO+H is also significant. The partial conversion of NO to N₂, directly or indirectly via NNH, occurs predominantly by reactions involving N and NH. Not surprisingly, the species NH₃, NH₂, NNH, and N₂H₂ do not play major roles in the neat flame.

Figure 6 is a reaction pathway diagram for the NH₃-doped flame. The addition of 4% NH₃ increases the number of reactions and species having major effects on the flame. As expected, the addition of the dopant causes only a small perturbation in the reactions involving the major species as compared to those in the neat flame. However, the addition of 4% NH₃ does significantly reduce the NO concentration. This results primarily from two effects: (1) a slight decrease in NO formation from reactions N₂O+H=NO+NH and N+OH=NO+H and (2) an increase in NO consumption by the NH₂ radical. NH₂ can convert NO to N₂ directly, or indirectly via the NNH intermediate. It should be specifically noted that the lowering of NO concentration in the doped flame is primarily chemical in origin, rather than due to the slight change in temperature profiles. This was proven by switching the input temperature profiles in the calculations. Switching the profiles causes only a slight change in the predicted NO profiles, particularly in the burnt gas concentrations, for either the neat or doped flame.

Table 3 compares the sensitivities of NO to various reaction rate coefficients for both neat and NH₃-doped H₂/N₂O/Ar flames. The sensitivity coefficients were calculated at 13.75 mm for both flames. They are scaled to 100 for reaction R20, N₂O+H=OH+N₂. Table 3 reveals that for

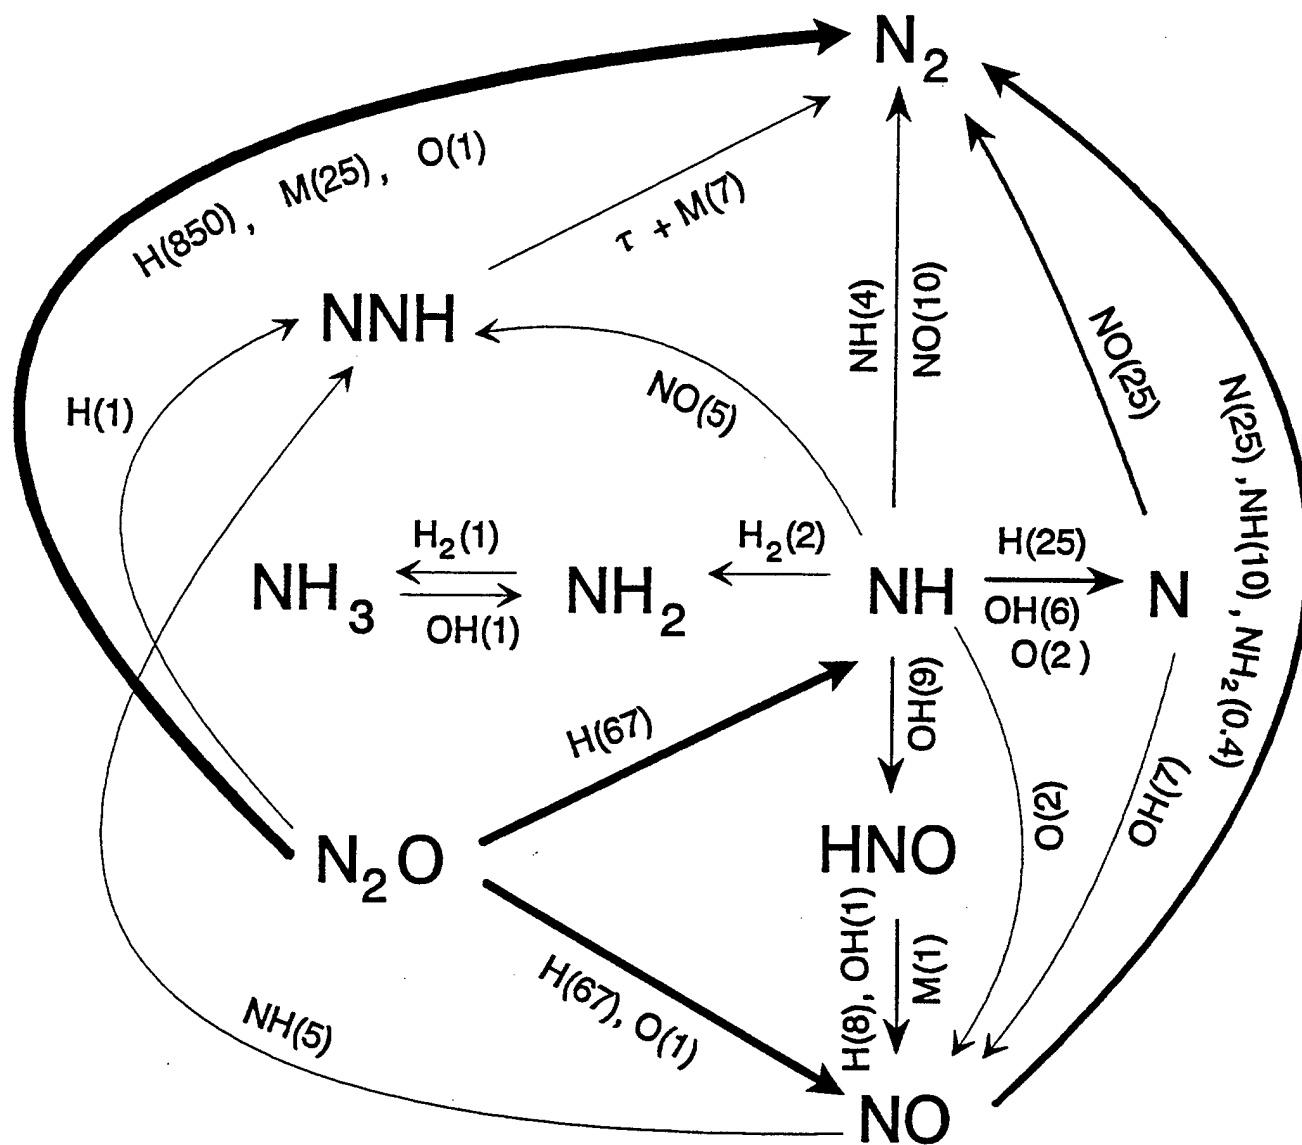


Figure 5. Pathway diagram of a 30-torr, neat $H_2/N_2O/Ar$ flame generated by integrating the net rate fluxes of individual reactions from the burner surface to 13.75 mm. For NNH destruction, $\tau + M$ indicates the total predissociation and collision assisted decomposition. ($100 = 4.428 \times 10^{-6} \text{ mole/cm}^2\text{-s}$).

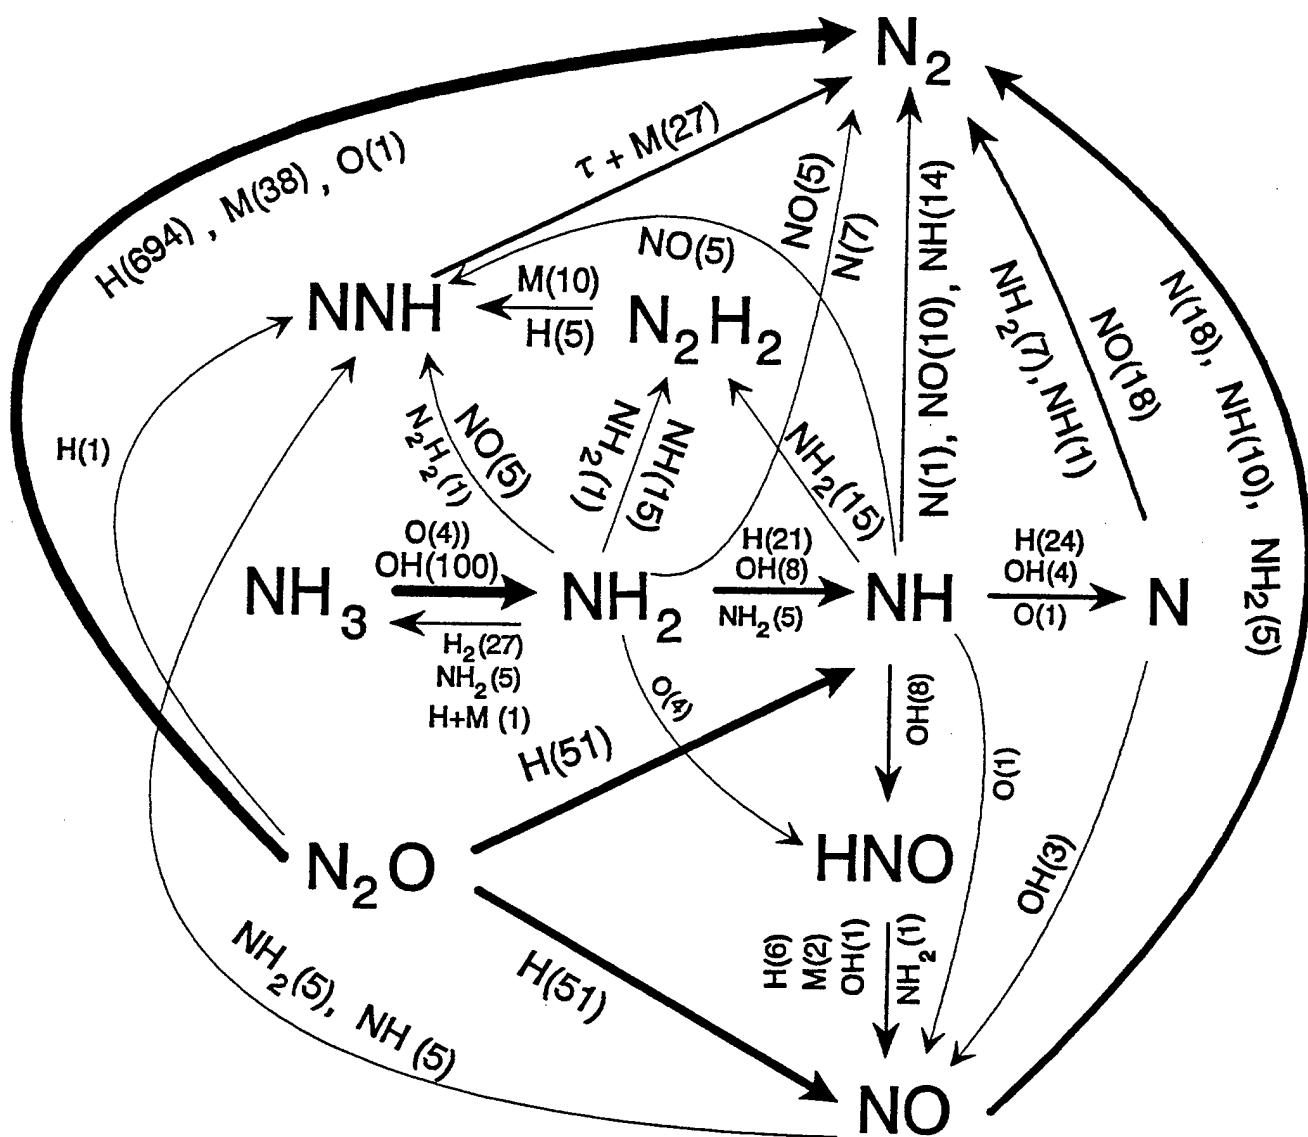


Figure 6. Pathway diagram of a 30-torr, 4% NH_3 -doped $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ flame generated by integrating the net rate fluxes of individual reactions from the burner surface to 13.75 mm. For NNH destruction, $\tau + \text{M}$ indicates the total predissociation and collision assisted decomposition. ($100 = 4.428 \times 10^{-6} \text{ mole/cm}^2\text{-s}$).

Table 3. Sensitivity Coefficients for NO in a Neat and NH₃-Doped Flame at 13.75 mm Above the Burner Surface

REACTION		SENSITIVITY COEFFICIENTS (Rel.)		
		Sign	Neat ^a	Doped ^b
20	N ₂ O+H=OH+N ₂	(-)	100.0	100.0
25	NH+NO=N ₂ O+H	(+)	60.2	71.4
2	H ₂ +OH=H ₂ O+H	(-)	25.6	21.0
29	NH+OH=HNO+H	(+)	25.5	22.7
74	NO+N=N ₂ +O	(-)	21.5	26.5
77	NO+H=N+OH	(+)	20.3	14.1
22	N ₂ O+M=N ₂ +O+M	(+)	15.0	3.4
26	NH+NO=N ₂ +OH	(-)	10.6	19.3
33	NH+O=NO+H	(+)	6.4	4.6
35	NH+NH=N ₂ +2H	(+)	3.7	11.5
3	H ₂ +O=H+OH	(-)	3.4	8.8
24	N ₂ O+O=NO+NO	(+)	2.7	1.7
32	N+H ₂ =NH+H	(-)	2.6	4.7
60	NNH+O=NO+NH	(-)	1.7	7.9
37	NH ₂ +O=HNO+H	(+)	1.3	10.4
43	NH ₂ +NH=N ₂ H ₂ +H	(+)	<1	20.4
41	NH ₂ +NO=NNH+OH	(-)	<1	11.3
42	NH ₂ +NO=N ₂ +H ₂ O	(-)	<1	10.9
44	NH ₂ +N=N ₂ +H+H	(+)	<1	10.3
40	NH ₂ +H=NH+H ₂		(+) <1	(-) 12.3
39	NH ₂ +OH=NH+H ₂ O	(-)	<1	4.3
49	NH ₃ +H=NH ₂ +H ₂	(-)	<1	3.1
17	OH+OH=H ₂ O+O		(-) <1	(+) 2.3

^a Logarithmically normalized [3] to 100 for the sensitivity coefficient of reaction 20 of neat H₂/N₂O/Ar flame (-0.5764).

^b Logarithmically normalized [3] to 100 for the sensitivity coefficient of reaction 20 of NH₃-doped H₂/N₂O/Ar flame (-0.6165).

both the neat and doped flames the NO concentration has a strong negative sensitivity to R20 and strong positive sensitivity to the reaction N₂O+H=NH+NO, -R25. This result is clearly due to the competition between the two channels for the N₂O+H reaction, one forming NO, the other N₂. For the neat flame, NO exhibits lesser but still important sensitivities to reactions R2, R29, R74, R77, R22, and R26. For most of these reactions the trends are similar for the doped flame.

However, one notes that in comparison, the doped flame shows much stronger sensitivities than the neat flame to several additional reactions. In particular, note that most of these additional reactions involve NH_2 , NH , or N . This is not surprising since the pathway diagrams indicate that these species play key roles in the consumption of NO . The signs of some of the sensitivity coefficients may be understood in terms of the competition between $\text{NH}_x + \text{NO}$ reactions, which result in the destruction of NO , and $\text{NH}_x + \text{NH}_y$ reactions, which ultimately result in conversion of the NH_3 to N_2 without removal of NO . For example, the two $\text{NH}_2 + \text{NO}$ reactions, R41 and R42, have negative coefficients because they ultimately convert NO to N_2 . In contrast the $\text{NH}_2 + \text{NH}$ and $\text{NH} + \text{NH}$ reactions, R43 and R35 respectively, merely convert two NH_x molecules ultimately to N_2 without destroying NO , thus, exhibiting a positive NO sensitivity coefficient. It appears that this competition for NH_x molecules is the reason for the leveling off of the effectiveness of NH_3 in reducing the NO that was observed experimentally. As the concentration of NH_3 is increased, the importance of $\text{NH}_x + \text{NH}_y$ reactions increases.

5. CONCLUSION

A combined experimental and modeling flame structure study of neat and NH_3 -doped $\text{H}_2/\text{N}_2\text{O}/\text{Ar}$ flames has been performed. Species' mole fractions and temperature profiles were recorded using MB/MS and thermocouple techniques, respectively. The modeling studies consisted of both equilibrium and PREMIX calculations. A chemical mechanism for the system was developed from a critical literature review and employed for modeling the species' profiles. The modeled profiles of the majority species agree very well with the experimental profiles for the neat flame and reasonably well for the doped flame. Quantitatively, the agreement between the modeled and experimental NO profiles is good for both the neat and doped flames. The modeled profile shows a 55% reduction in the NO mole fraction in the post-flame region when 4% NH_3 is added to the neat flame compared to a 45% reduction in the measured profile. The modeled and experimental NO profiles for the neat flame and the experimental profile in the doped flame exhibit plateaus in the post-flame region. However, the modeled NO profile in the doped flame exhibits a post-flame decay. In addition, the model overpredicts the NH_3 mole fraction in the post-flame region. Rate analysis shows, conclusively, that this overprediction is the primary cause

of the predicted NO decay. Calculations indicate that these discrepancies are due to the model and not the experiment, suggesting that refinements in the chemical mechanism are necessary. Rate and sensitivity analyses reveal that the dopant slightly decreases the amount of NO formed by the reactions $\text{N}_2\text{O} + \text{H} = \text{NO} + \text{NH}$ and $\text{N} + \text{OH} = \text{NO} + \text{H}$ and increases its consumption via reaction with NH_2 , which leads to conversion of NO to N_2 . The efficacy of NH_3 in reducing NO is stymied at high NH_3 concentrations, an effect likely due to the increased role of $\text{NH}_x + \text{NH}_y$ reactions that convert NH_3 to N_2 .

INTENTIONALLY LEFT BLANK.

6. REFERENCES

1. Anderson, W. R., N. Ilincic, N. E. Meagher, K. Seshadri, and J. A. Vanderhoff. "Detailed and Reduced Chemical Mechanisms for the Dark Zones of Double Base and Nitramine Propellants in the Intermediate Temperature Regime." 32nd JANNAF Combustion Subcommittee Meeting, CPIA Publication 638, vol. 1, p. 197, 1995.
2. Lyon, R. K., and J. E. Hardy. Industrial Engineering Chemistry Fundamentals. vol. 25, pp. 10-24, 1986.
3. Sausa, R. C., W. R. Anderson, D. C. Dayton, C. M. Faust, and S. L. Howard. Combustion and Flame. vol. 94, pp. 407-425, and references therein, 1993.
4. Dayton, D. C., C. M. Faust, W. R. Anderson, and R. C. Sausa. Combustion and Flame. vol. 99, pp. 323-330, and references therein, 1994.
5. Vandooren, J., M. C. Branch, and P. J. Van Tiggelen. Combustion Flame. vol. 90, pp. 247-258, 1992.
6. Kent, J. H. Combustion and Flame, vol. 14, pp. 279-281, 1970.
7. Kohse-Höinghaus, K. J. Jefferies, R. A. Copeland, G. P. Smith, and D. R. Crosley. Twenty-Second Symposium (International) on Combustion. The Combustion Institute, Pittsburgh, PA, p. 1867, 1988.
8. Svehla, R. A., and B. J. McBride. NASA-TN-D-7057, January 1973.
9. Kee, R. J., F. M. Rupley, and J. A. Miller. Sandia Report SAND-89-8009, 1989.
10. Kee, R. J., J. F. Grcar, M. D. Smooke, and J. A. Miller. Sandia Report SAND-85-8240, Sandia National Laboratories, 1985.
11. Kee, R. J., J. Warnatz, and J. A. Miller. Sandia Report SAND-83-8209, Sandia National Laboratories, 1983.
12. Kee, R. J., F. M. Rupley, and J. A. Miller. Sandia Report SAND87-8215, Sandia National Laboratories, 1987.
13. Anderson, W. R. Journal of Physical Chemistry. vol. 93, pp. 530-536, 1989.
14. Anderson, W. R. "Critical Review of the Heats of Formation of HNO and Some Related Species." ARL Technical Report, in review, 1997.

15. Ritter, E. R. Journal of Chemical Information and Computation Sciences. vol. 31, pp. 400–408, 1991.
16. Miller, J. A., and C. T. Bowman. Progress in Energy and Combustion Science. vol. 15, pp. 287–338, 1989.
17. Michael, J. V., and J. W. Sutherland. Journal of Physical Chemistry. vol. 92, pp. 3853–3857, 1988.
18. Sutherland, J. W., J. V. Michael, A. N. Pirraglia, F. L. Nesbitt, and R. B. Klemm. Twenty-First Symposium (International) on Combustion. The Combustion Institute, Pittsburgh, PA, pp. 929–941, 1988.
19. Cohen, N., and K. R. Westberg. Journal of Physical and Chemical Reference Data. vol. 12, pp. 531–590, 1983.
20. Masten, D. A., R. K. Hanson, and C. T. Bowman. Journal of Physical Chemistry. vol. 94, pp. 7119–7128, 1990.
21. Tsang, W., and R. F. Hampson. Journal of Physical and Chemical Reference Data. vol. 15, pp. 1087–1279, 1986.
22. Baulch, D. L., D. D. Drysdale, D. G. Horne, and A. C. Lloyd. Evaluated Kinetic Data for High Temperature Reactions. vol 1. Homogeneous Gas Phase Reactions of the H_2 - O_2 System Butterworth, London, 1972.
23. Marshall, P., T. Ko, and A. Fontijn. Journal of Physical Chemistry. vol. 93, pp. 1922–1927, 1989.
24. Bozzelli, J. W., and A. M. Dean. International Journal of Chemical Kinetics. vol. 27, pp. 1097–1109, 1995.
25. Röhrig, M., E. L. Peterson, D. F. Davidson, and R. K. Hanson. International Journal of Chemical Kinetics. in press.
26. Davidson, D. F., M. D. DiRosa, A. Y. Chang, and R. K. Hanson. “Shock Tube Measurements of the Major Product Channels of N_2O+O .” Shock Waves, vol. 2, pp. 813–818, K. Takayama, ed., New York: Springer-Verlag, 1992.
27. Hanson, R. K., and S. Salimian. “Survey of Rate Constants in the N/H/O System.” Combustion Chemistry. W. C. Gardiner, ed., New York: Springer-Verlag, 1985.
28. Miller, J. A., and C. F. Melius. Twenty-Fourth Symposium (International) on Combustion. The Combustion Institute, Pittsburgh, p. 719, PA, 1992.

29. Mertens, J. D., A. Y. Chang, R. K. Hanson, and C. T. Bowman. International Journal of Chemical Kinetics. vol. 23, pp. 173–196, 1991.
30. Davidson, D. F., and R. K. Hanson. International Journal of Chemical Kinetics. vol. 22, pp. 843–861, 1990.
31. Mertens, J. D., A. Y. Chang, R. K. Hanson, and C. T. Bowman. International Journal of Chemical Kinetics. vol. 21, pp. 1049–1067, 1989.
32. Bozzelli, J. W., and A. M. Dean. "Combustion Chemistry of Nitrogen." Combustion Chemistry, 2nd Edition, W. C. Gardiner, Jr., Ed., Springer-Verlag, to be published.
33. Davidson, D. F., K. K. Kohse-Hoinghaus, A. Y. Chang, and R. K. Hanson. International Journal of Chemical Kinetics. vol. 22, pp. 513–535, 1990.
34. Ko, T., P. Marshall, and A. Fontijn. Journal of Physical Chemistry. vol. 94, pp. 1401–1404, 1990.
35. Sutherland, J. W., P. M. Patterson, and R. B. Klemm. Journal of Physical Chemistry. vol. 94, pp. 2471–2475, 1990.
36. Soto, M. R., M. Page, and M. L. McKee. Chemical Physics. vol. 153, pp. 415–426, 1991.
37. Lin, M. C., Y. He, and C. F. Melius. International Journal of Chemical Kinetics. vol. 24, pp. 489–516, 1992.
38. Diau, E. W., M. J. Halbgewacks, A. R. Smith, and M. C. Lin. International Journal of Chemical Kinetics. vol. 27, pp. 867–881, 1995.
39. Soto, M. R., and M. Page. Journal of Chemical Physics. vol. 97, pp. 7287–7296, 1992.
40. Tsang, W., and J. T. Herron. Journal of Physical and Chemical Reference Data. vol. 20, pp. 609–663, 1991.
41. Vaghjiani, G. L. International Journal of Chemical Kinetics. vol. 27, pp. 777–790, 1995.
42. Dean, A. M., M. S. Chou, and D. Stern. "Nitrogen Chemistry in Flames. Observations and Detailed Kinetic Modeling." The Chemistry of Combustion Processes. T. M. Sloane, ed., ACS Symposium Series 249, American Chemical Society, Washington, DC, 1984.
43. Glarborg, P., J. E. Johnson, and K. Dam-Johansen. Combustion and Flame. vol. 99, pp. 523–532, 1994.
44. Allen, M. T., R. A. Yetter, and F. L. Dryer. International Journal of Chemical Kinetics. vol. 27, pp. 883–1909, 1995.
45. Miller, J. A. Private Communication Regarding BAC-MP4 Results of C. F. Melius, and G2 results of J. L. Durant, Jr., 1993.

INTENTIONALLY LEFT BLANK.

NO. OF
COPIES ORGANIZATION

2 DEFENSE TECHNICAL
INFORMATION CENTER
DTIC DDA
8725 JOHN J KINGMAN RD
STE 0944
FT BELVOIR VA 22060-6218

1 HQDA
DAMO FDQ
DENNIS SCHMIDT
400 ARMY PENTAGON
WASHINGTON DC 20310-0460

1 CECOM
SP & TRRSTR L COMMCTN DIV
AMSEL RD ST MC M
H SOICHER
FT MONMOUTH NJ 07703-5203

1 PRIN DPTY FOR TCHNLGY HQ
US ARMY MATCOM
AMCDCG T
M FISETTE
5001 EISENHOWER AVE
ALEXANDRIA VA 22333-0001

1 PRIN DPTY FOR ACQUSTN HQS
US ARMY MATCOM
AMCDCG A
D ADAMS
5001 EISENHOWER AVE
ALEXANDRIA VA 22333-0001

1 DPTY CG FOR RDE HQS
US ARMY MATCOM
AMCRD
BG BEAUCHAMP
5001 EISENHOWER AVE
ALEXANDRIA VA 22333-0001

1 ASST DPTY CG FOR RDE HQS
US ARMY MATCOM
AMCRD
COL S MANESS
5001 EISENHOWER AVE
ALEXANDRIA VA 22333-0001

NO. OF
COPIES ORGANIZATION

1 DPTY ASSIST SCY FOR R&T
SARD TT F MILTON
THE PENTAGON RM 3E479
WASHINGTON DC 20310-0103

1 DPTY ASSIST SCY FOR R&T
SARD TT D CHAIT
THE PENTAGON
WASHINGTON DC 20310-0103

1 DPTY ASSIST SCY FOR R&T
SARD TT K KOMINOS
THE PENTAGON
WASHINGTON DC 20310-0103

1 DPTY ASSIST SCY FOR R&T
SARD TT B REISMAN
THE PENTAGON
WASHINGTON DC 20310-0103

1 DPTY ASSIST SCY FOR R&T
SARD TT T KILLION
THE PENTAGON
WASHINGTON DC 20310-0103

1 OSD
OUSD(A&T)/ODDDR&E(R)
J LUPO
THE PENTAGON
WASHINGTON DC 20301-7100

1 INST FOR ADVNCD TCHNLGY
THE UNIV OF TEXAS AT AUSTIN
PO BOX 202797
AUSTIN TX 78720-2797

1 DUSD SPACE
1E765 J G MCNEFF
3900 DEFENSE PENTAGON
WASHINGTON DC 20301-3900

1 USAASA
MOAS AI W PARRON
9325 GUNSTON RD STE N319
FT BELVOIR VA 22060-5582

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	CECOM PM GPS COL S YOUNG FT MONMOUTH NJ 07703
1	GPS JOINT PROG OFC DIR COL J CLAY 2435 VELA WAY STE 1613 LOS ANGELES AFB CA 90245-5500
1	ELECTRONIC SYS DIV DIR CECOM RDEC J NIEMELA FT MONMOUTH NJ 07703
3	DARPA L STOTTS J PENNELLA B KASPAR 3701 N FAIRFAX DR ARLINGTON VA 22203-1714
1	SPCL ASST TO WING CMNDR 50SW/CCX CAPT P H BERNSTEIN 300 O'MALLEY AVE STE 20 FALCON AFB CO 80912-3020
1	USAF SMC/CED DMA/JPO M ISON 2435 VELA WAY STE 1613 LOS ANGELES AFB CA 90245-5500
1	US MILITARY ACADEMY MATH SCI CTR OF EXCELLENCE DEPT OF MATHEMATICAL SCI MDN A MAJ DON ENGEN THAYER HALL WEST POINT NY 10996-1786
1	DIRECTOR US ARMY RESEARCH LAB AMSRL CS AL TP 2800 POWDER MILL RD ADELPHI MD 20783-1145

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	DIRECTOR US ARMY RESEARCH LAB AMSRL CS AL TA 2800 POWDER MILL RD ADELPHI MD 20783-1145
3	DIRECTOR US ARMY RESEARCH LAB AMSRL CI LL 2800 POWDER MILL RD ADELPHI MD 20783-1145
	<u>ABERDEEN PROVING GROUND</u>
2	DIR USARL AMSRL CI LP (305)

NO. OF
PAGES ORGANIZATION

1 HQDA
SARD TT
DR F MILTON
WASH DC 20310-0103

1 HQDA
SARD TT
MR J APPEL
WASH DC 20310-0103

1 HQDA OASA RDA
DR C H CHURCH
PENTAGON ROOM 3E486
WASH DC 20310-0103

4 COMMANDER
US ARMY RESEARCH OFC
R GHIRARDELLI
D MANN
R SINGLETON
R SHAW
P O BOX 12211
RESEARCH TRIANGLE PARK NC
27709-2211

1 DIRECTOR
ARMY RESEARCH OFFICE
AMXRO RT IP LIB SRVCS
P O BOX 12211
RESEARCH TRIANGLE PARK NC
27709-2211

2 COMMANDER
US ARMY ARDEC
AMSTA AR AEE B
D S DOWNS
PICATINNY ARSENAL NJ
07806-5000

2 COMMANDER
US ARMY ARDEC
AMSTA AR AEE J A LANNON
PICATINNY ARSENAL NJ
07806-5000

1 COMMANDER
US ARMY ARDEC
AMSTA AR AEE BR
L HARRIS
PICATINNY ARSENAL NJ
07806-5000

NO. OF
PAGES ORGANIZATION

2 COMMANDER
US ARMY MISSILE COMMAND
AMSMI RD PR E A R MAYKUT
AMSMI RD PR P R BETTS
REDSTONE ARSENAL AL

1 OFFICE OF NAVAL RESEARCH
DEPARTMENT OF THE NAVY
R S MILLER CODE 432
800 N QUINCY STREET
ARLINGTON VA 22217

1 COMMANDER
NAVAL AIR SYSTEMS COMMAND
J RAMNARACE AIR-54111C
WASHINGTON DC 20360

2 COMMANDER
NSWC
R BERNECKER R-13
G B WILMOT R-16
SILVER SPRING MD 20903-5000

5 COMMANDER
NAVAL RSRCH LAB
M C LIN
J MCDONALD
E ORAN
J SHNUR
R J DOYLE CODE 6110
WASHINGTON DC 20375

2 COMMANDER
NAVAL WEAPONS CENTER
T BOGGS CODE 388
T PARR CODE 3895
CHINA LAKE CA 93555-6001

1 SUPERINTENDENT
NAVAL POSTGRDTE SCHL
DEPT OF AERONAUTICS
D W NETZER
MONTEREY CA 93940

3 AL LSCF
R CORLEY
R GEISLER
J LEVINE
EDWARDS AFB CA 93523-5000

<u>NO. OF PAGES</u>	<u>ORGANIZATION</u>	<u>NO. OF PAGES</u>	<u>ORGANIZATION</u>
1	AFOSR J M TISHKOFF BOLLING AIR FORCE BASE WASHINGTON DC 20332	2	PRINCETON COMBUSTION RSRCH LABORATORIES INC N A MESSINA M SUMMERFIELD PRINCETON CORPORATE PLAZA BLDG IV SUITE 119 11 DEERPARK DRIVE MONMOUTH JUNCTION NJ 08852
1	OSD SDIO IST L CAVENY PENTAGON WASHINGTON DC 20301-7100		
1	COMMANDANT USAFAS ATSF TSM CN FORT SILL OK 73503-5600	3	DIRECTOR SANDIA NATIONAL LABS DIVISION 8354 S JOHNSTON P MATTERN D STEPHENSON LIVERMORE CA 94550
1	UNIV OF DAYTON RSRCH INST D CAMPBELL AL PAP EDWARDS AFB CA 93523	1	BRIGHAM YOUNG UNIVERSITY DEPT OF CHMCL ENGNRNG M W BECKSTEAD PROVO UT 84058
1	NASA LANGLEY RESEARCH CENTER LANGLEY STATION G B NORTHAM MS 168 HAMPTON VA 23365	1	CALIFORNIA INST OF TECH JET PROPULSION LAB L STRAND MS 125 224 4800 OAK GROVE DRIVE PASADENA CA 91109
4	NTNL BUREAU OF STNDRDS J HASTIE M JACOX T KASHIWAGI H SEMERJIAN US DEPT OF COMMERCE WASHINGTON DC 20234	1	CALIFORNIA INSTITUTE OF TECHNOLOGY F E C CULICK MC 301-46 204 KARMAN LAB PASADENA CA 91125
2	DIRECTOR LLNL C WESTBROOK W TAO MS L 282 P O BOX 808 LIVERMORE CA 94550	1	UNIV OF CALIFORNIA LOS ALAMOS SCNTFC LAB P O BOX 1663 MAIL STOP B216 LOS ALAMOS NM 87545
1	DIRECTOR LOS ALAMOS NATIONAL LAB B NICHOLS T7 MS-B284 P O BOX 1663 LOS ALAMOS NM 87545	1	UNIV OF CA BERKELEY CHEMISTRY DEPARTMENT C BRADLEY MOORE 211 LEWIS HALL BERKELEY CA 94720
		1	UNIV OF CA SAN DIEGO F A WILLIAMS AMES B010 LA JOLLA CA 92093

<u>NO. OF PAGES</u>	<u>ORGANIZATION</u>
2	UNIV OF CA SANTA BARBARA QUANTUM INSTITUTE K SCHOFIELD M STEINBERG SANTA BARBARA CA 93106
1	UNIV OF CO AT BOULDER ENGINEERING CENTER J DAILY CAMPUS BOX 427 BOULDER CO 80309-0427
3	UNIV OF SOUTHERN CA DEPT OF CHEMISTRY R BEAUDET S BENSON C WITTIG LOS ANGELES CA 90007
1	CORNELL UNIVERSITY DEPT OF CHEMISTRY T A COOL BAKER LABORATORY ITHACA NY 14853
1	UNIV OF DELAWARE T BRILL CHEMISTRY DEPARTMENT NEWARK DE 19711
1	UNIVERSITY OF FLORIDA DEPT OF CHEMISTRY J WINEFORDNER GAINESVILLE FL 32611
3	GA INST OF TECHNOLOGY SCHL OF AERSPCE ENGNRNG E PRICE W C STRAHLE B T ZINN ATLANTA GA 30332
1	UNIVERSITY OF ILLINOIS DEPT OF MECH ENG H KRIER 144MEB 1206 W GREEN ST URBANA IL 61801

<u>NO. OF PAGES</u>	<u>ORGANIZATION</u>
1	THE JOHNS HOPKINS UNIV CPIA T W CHRISTIAN 10630 LTLE PTXNT PKWY STE 202 COLUMBIA MD 21044-3200
1	UNIVERSITY OF MICHIGAN GAS DYNAMICS LAB AEROSPACE ENGNRNG BLDG G M FAETH ANN ARBOR MI 48109-2140
1	UNIVERSITY OF MINNESOTA DEPT OF MCHNCL ENGNRNG E FLETCHER MINNEAPOLIS MN 55455
4	PA STATE UNIVERSITY DEPT OF MCHNCL ENGNRNG K KUO M MICCI S THYNELL V YANG UNIVERSITY PARK PA 16802
2	PRINCETON UNIVERSITY FORRESTAL CAMPUS LIB K BREZINSKY I GLASSMAN P O BOX 710 PRINCETON NJ 08540
1	PURDUE UNIVERSITY SCHOOL OF AERO & ASTRO J R OSBORN GRISSOM HALL WEST LAFAYETTE IN 47906
1	PURDUE UNIVERSITY DEPT OF CHEMISTRY E GRANT WEST LAFAYETTE IN 47906
2	PURDUE UNIVERSITY SCHL OF MCHNCL ENGNRNG N M LAURENDEAU S N B MURTHY TSPC CHAFFEE HALL WEST LAFAYETTE IN 47906

<u>NO. OF PAGES</u>	<u>ORGANIZATION</u>	<u>NO. OF PAGES</u>	<u>ORGANIZATION</u>
1	RENSSELAER PLTYCHNC INST DEPT OF CHMCL ENGRNG A FONTIJN TROY NY 12181	1	GENERAL APPLIED SCIENCE LABORATORIES INC 77 RAYNOR AVENUE RONKONKAMA NY 11779-6649
1	STANFORD UNIVERSITY DEPT OF MCHNCL ENGRNG R HANSON STANFORD CA 94305	1	GENERAL ELECTRIC ORDNANCE SYSTEMS J MANDZY 100 PLASTICS AVENUE PITTSFIELD MA 01203
1	UNIVERSITY OF TEXAS DEPT OF CHEMISTRY W GARDINER AUSTIN TX 78712	1	GENERAL MOTORS RSCH LABS PHYSCL CHMSTRY DEPT T SLOANE WARREN MI 48090-9055
1	VIRGINIA PLYTCHNC INST AND STATE UNIVERSITY A SCHETZ BLACKSBURG VA 24061	2	HERCULES INC ALLEGHENY BALLISTICS LAB W B WALKUP E A YOUNT P O BOX 210 ROCKET CENTER WV 26726
1	APPLIED COMBUSTION TECHNOLOGY INC A M VARNEY P O BOX 607885 ORLANDO FL 32860	1	HERCULES INC R V CARTWRIGHT 100 HOWARD BLVD KENVIL NJ 07847
2	APPLIED MCHNCS REVIEWS THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS R E WHITE A B WENZEL 345 E 47TH STREET NEW YORK NY 10017	1	ALLIANT TECHSYSTEMS INC MARINE SYSTEMS GROUP D E BRODEN MS MN50-2000 600 2ND STREET NE HOPKINS MN 55343
1	BATTELLE TWSTIAC 505 KING AVENUE COLUMBUS OH 43201-2693	1	ALLIANT TECHSYSTEMS INC R E TOMPKINS MN 11 2720 600 SECOND ST NORTH HOPKINS MN 55343
1	COHEN PRFSSNL SERVICES N S COHEN 141 CHANNING STREET REDLANDS CA 92373	1	IBM CORPORATION A C TAM RESEARCH DIVISION 5600 COTTLE ROAD SAN JOSE CA 95193
1	EXXON RSRCH & ENGRNG CO A DEAN ROUTE 22E ANNANDALE NJ 08801	1	IIT RESEARCH INSTITUTE R F REMALY 10 WEST 35TH STREET CHICAGO IL 60616

<u>NO. OF PAGES</u>	<u>ORGANIZATION</u>
1	LOCKHEED MSLS & SPACE CO GEORGE LO 3251 HANOVER STREET DEPT 52-35 B204 2 PALO ALTO CA 94304
1	OLIN ORDNANCE V MCDONALD LIBRARY P O BOX 222 ST MARKS FL 32355-0222
1	PAUL GOUGH ASSOCIATES INC P S GOUGH 1048 SOUTH STREET PORTSMOUTH NH 03801-5423
1	HUGHES AIRCRAFT COMPANY T E WARD 8433 FALLBROOK AVENUE CANOGA PARK CA 91303
1	ROCKWELL INTRNTNL CORP ROCKETDYNE DIVISION J E FLANAGAN HB02 6633 CANOGA AVENUE CANOGA PARK CA 91304
1	SCIENCE APPLICATIONS INC R B EDELMAN 23146 CUMORAH CREST WOODLAND HILLS CA 91364
3	SRI INTERNATIONAL G SMITH D CROSLEY D GOLDEN 333 RAVENSWOOD AVENUE MENLO PARK CA 94025
1	STEVENS INST OF TECH DAVIDSON LABORATORY R MCALEVY III HOBOKEN NJ 07030
1	SVERDRUP TCHNLGY INC LERC GROUP R J LOCKE MS SVR 2 2001 AEROSPACE PKWY BROOK PARK OH 44142

<u>NO. OF PAGES</u>	<u>ORGANIZATION</u>
1	SVERDRUP TCHNLGY INC J DEUR 2001 AEROSPACE PARKWAY BROOK PARK OH 44142
3	THIOKOL CORPORATION ELKTON DIVISION R BIDDLE R WILLER TECH LIB P O BOX 241 ELKTON MD 21921
3	THIOKOL CORPORATION WASATCH DIVISION S J BENNETT P O BOX 524 BRIGHAM CITY UT 84302
1	UNITED TCHNLGS RSRCH CTR A C ECKBRETH EAST HARTFORD CT 06108
1	UNITED TECHNOLOGIES CORP CHEMICAL SYSTEMS DIVISION R R MILLER P O BOX 49028 SAN JOSE CA 95161-9028
1	UNIVERSAL PRPLSN CO H J MCSPADDEN 25401 NORTH CENTRAL AVE PHOENIX AZ 85027-7837
1	VERITAY TECHNOLOGY INC E B FISHER 4845 MILLERSPORT HWY P O BOX 305 EAST AMHERST NY 14051-0305
1	FREEDMAN ASSOCIATES E FREEDMAN 2411 DIANA ROAD BALTIMORE MD 21209-1525
1	ALLIANT TECHSYSTEMS INC J BODE 600 SECOND ST NE HOPKINS MN 55343

<u>NO. OF PAGES</u>	<u>ORGANIZATION</u>
1	ALLIANT TECHSYSTEMS INC C CANDLAND 600 SECOND ST NE HOPKINS MN 55343
1	ALLIANT TECHSYSTEMS INC L OSGOOD 600 SECOND ST NE HOPKINS MN 55343
1	ALLIANT TECHSYSTEMS INC R BURETTA 600 SECOND ST NE HOPKINS MN 55343
1	ALLIANT TECHSYSTEMS INC R BECKER 600 SECOND ST NE HOPKINS MN 55343
1	ALLIANT TECHSYSTEMS INC M SWENSON 600 SECOND ST NE HOPKINS MN 55343
1	BENET LABORATORIES SAM SOPOK AMSTA AR CCB B WATERVLIET NY 12189

<u>NO. OF PAGES</u>	<u>ORGANIZATION</u>
	<u>ABERDEEN PROVING GROUND</u>
41	DIR, USARL ATTN: AMSRL-WM-P, A.W. HORST AMSRL-WM-PC, B.E. FORCH G.F. ADAMS W.R. ANDERSON R.A. BEYER S.W. BUNTE C.F. CHABALOWSKI K.P. MCNEILL- BOONSTOPPEL A. COHEN R. CUMPTON R. DANIEL D. DEVYNCK R.A. FIFER J.M. HEIMERL B.E. HOMAN A. JUHASZ A.J. KOTLAR R. KRANZE E. LANCASTER W.F. MCBRATNEY K.L. MCNESBY M. MCQUAID N.E. MEAGHER M.S. MILLER A.W. MIZIOLEK J.B. MORRIS J.E. NEWBERRY S.V. PAI R.A. PESCE-RODRIGUEZ J. RASIMAS P. REEVES B.M. RICE P. SAEGAR R.C. SAUSA M.A. SCHROEDER R. SCHWEITZER L.D. SEGER J.A. VANDERHOFF D. VENIZELOS A. WHREN H.L. WILLIAMS

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE June 1997	3. REPORT TYPE AND DATES COVERED Final, Jan 94 - Jan 97		
4. TITLE AND SUBTITLE Flame Structure Studies of Neat and NH ₃ -Doped Low-Pressure H ₂ /N ₂ O/Ar Flames by Molecular Beam Mass Spectrometry		5. FUNDING NUMBERS PR: 1L161102AH43		
6. AUTHOR(S) R. C. Sausa, G. Singh, G. W. Lemire, and W. R. Anderson				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRL-WM-PC Aberdeen Proving Ground, MD 21005-5066		8. PERFORMING ORGANIZATION REPORT NUMBER ARL-TR-1410		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSORING/MONITORING AGENCY REPORT NUMBER		
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.		12b. DISTRIBUTION CODE		
13. ABSTRACT (Maximum 200 words) understand the fundamental mechanism for NO formation and destruction and to predict the efficacy of NH ₃ on the rate of conversion of NO to N ₂ . Species concentration and temperature profiles are measured with molecular-beam-mass spectrometer and thin-wire thermocouple, respectively. Species profiled include H ₂ , N ₂ O, NH ₃ , N ₂ , NO, and Ar. The experimental mole fractions are compared to both equilibrium and one-dimensional premixed laminar flame code (PREMIX) calculations. The PREMIX code employs a chemical mechanism consisting of 87 reactions and 20 species with rate constants obtained from a critical literature review. Equilibrium calculations are in very good agreement with both experimental and PREMIX calculations for N ₂ O, N ₂ , and H ₂ O in the postflame region of both neat and doped flames, but underpredict the H ₂ and NO mole fractions. The PREMIX profiles of the majority species agree very well with the experiment for the neat flame and reasonably well for the doped flame. A 55% reduction in the NO mole fraction for 4% dopant is predicted in the post-flame region, in good agreement with that observed experimentally. The flame calculations overpredict, however, the NH ₃ mole fractions in the post-flame region, suggesting that refinements in the model are necessary. Rate and sensitivity analyses reveal that the decrease in NO mole fraction results from less NO formation by the reactions involving N ₂ O+H and more of its consumption to N ₂ by reactions involving NO+NH ₂ .				
14. SUBJECT TERMS molecular beam mass spectrometry, PREMIX modeling, low-pressure flames, hydrogen/nitrous oxide, ammonia doped, species profiles, temperature			15. NUMBER OF PAGES 33	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL	

INTENTIONALLY LEFT BLANK.

USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

1. ARL Report Number/Author ARL-TR-1410 (Sausa) Date of Report June 1997

2. Date Report Received _____

3. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) _____

4. Specifically, how is the report being used? (Information source, design data, procedure, source of ideas, etc.) _____

5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. _____

6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) _____

**CURRENT
ADDRESS**

Organization

Name

E-mail Name

Street or P.O. Box No.

City, State, Zip Code

7. If indicating a Change of Address or Address Correction, please provide the Current or Correct address above and the Old or Incorrect address below.

**OLD
ADDRESS**

Organization

Name

Street or P.O. Box No.

City, State, Zip Code

(Remove this sheet, fold as indicated, tape closed, and mail.)
(DO NOT STAPLE)

DEPARTMENT OF THE ARMY


OFFICIAL BUSINESS

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 0001,APG,MD

POSTAGE WILL BE PAID BY ADDRESSEE

DIRECTOR
US ARMY RESEARCH LABORATORY
ATTN AMSRL WM PC
ABERDEEN PROVING GROUND MD 21005-5066



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

