



FuelCell Energy

World Leader in Ultra-Clean Power

Fuel Cell Power Plants Renewable and Waste Fuels

**DOE-DOD Workshop
Washington, DC.
January 13, 2011**

reliable, efficient, ultra-clean

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 13 JAN 2011		2. REPORT TYPE		3. DATES COVERED 00-00-2011 to 00-00-2011	
4. TITLE AND SUBTITLE Fuel Cell Power Plants Renewable and Waste Fuels				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) FuelCell Energy, Inc,3 Great Pasture Rd,Danbury,CT,06813				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES presented at the DOE-DOD Waste-to-Energy using Fuel Cells Workshop held Jan. 13, 2011 in Washington DC. U.S. Government or Federal Rights License					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 23	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			



FuelCell Energy

FuelCell Energy, Inc.


- Premier developer of stationary fuel cell technology — founded in 1969
- Over 50 installations in North America, Europe, and Asia
- Industrial, commercial, utility products
- 300 KW to 50 MW and beyond





FuelCell Energy

Product Line Based on Stack Building Block

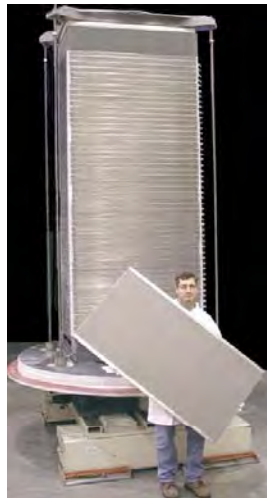

Cell Package and Stack




Single-Stack Module




Four-Stack Module



DFC300
Single Module
Powerplant
300 kW

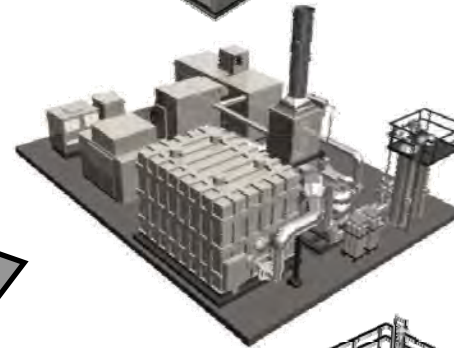

DFC1500
One 4-Stack
Module
1.4 MW

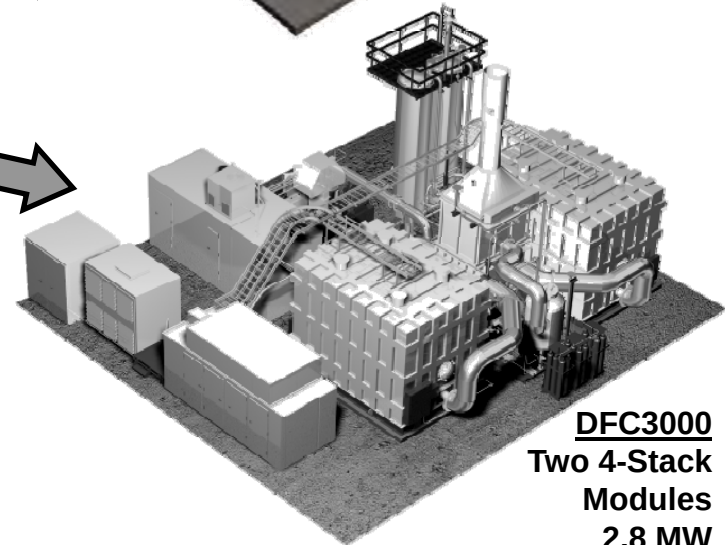

DFC3000
Two 4-Stack
Modules
2.8 MW



DFC1500 Powerplant Subsystems


Electrical Balance Of Plant (EBOP):

- Converts DC power to grid quality AC power
- Meets IEEE and UL Codes for Safety and Grid Interface

Mechanical Balance Of Plant (MBOP):

- Water and Fuel flow cleanup and preheat
- Air supply, startup heater

Direct Fuel Cell Module: 4-stack Module

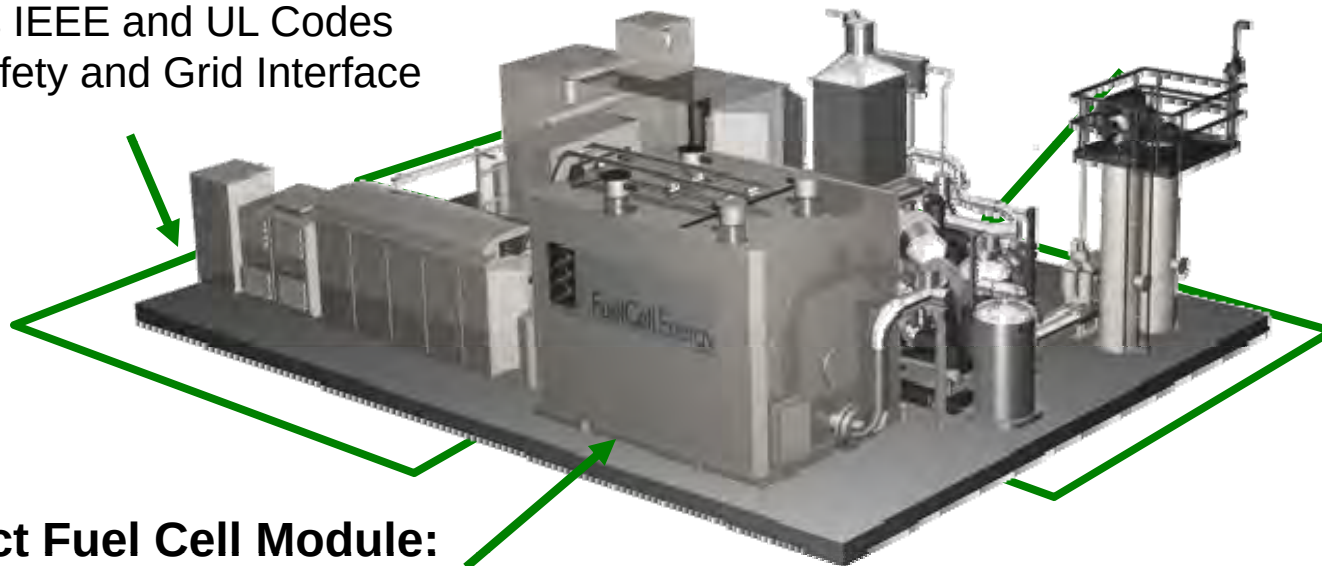



- **On-site self generation of combined heat and power**
 - Clean Power with natural gas fuel
 - Renewable Power with biofuels
- **Grid connected power generation**
 - High Efficiency Grid support
 - Renewable Portfolio Standards





Fuels Resources for DFC


- Natural Gas and LNG
- Propane
- Biogas (by Anaerobic Digestion)
 - Municipal Waste Water Treatment
 - Brewery
 - Food and Animal Waste
- Biogasifier derived Fuels



FuelCell Energy

Comparative Electrical Efficiency

DFC power plants offer the high efficiency

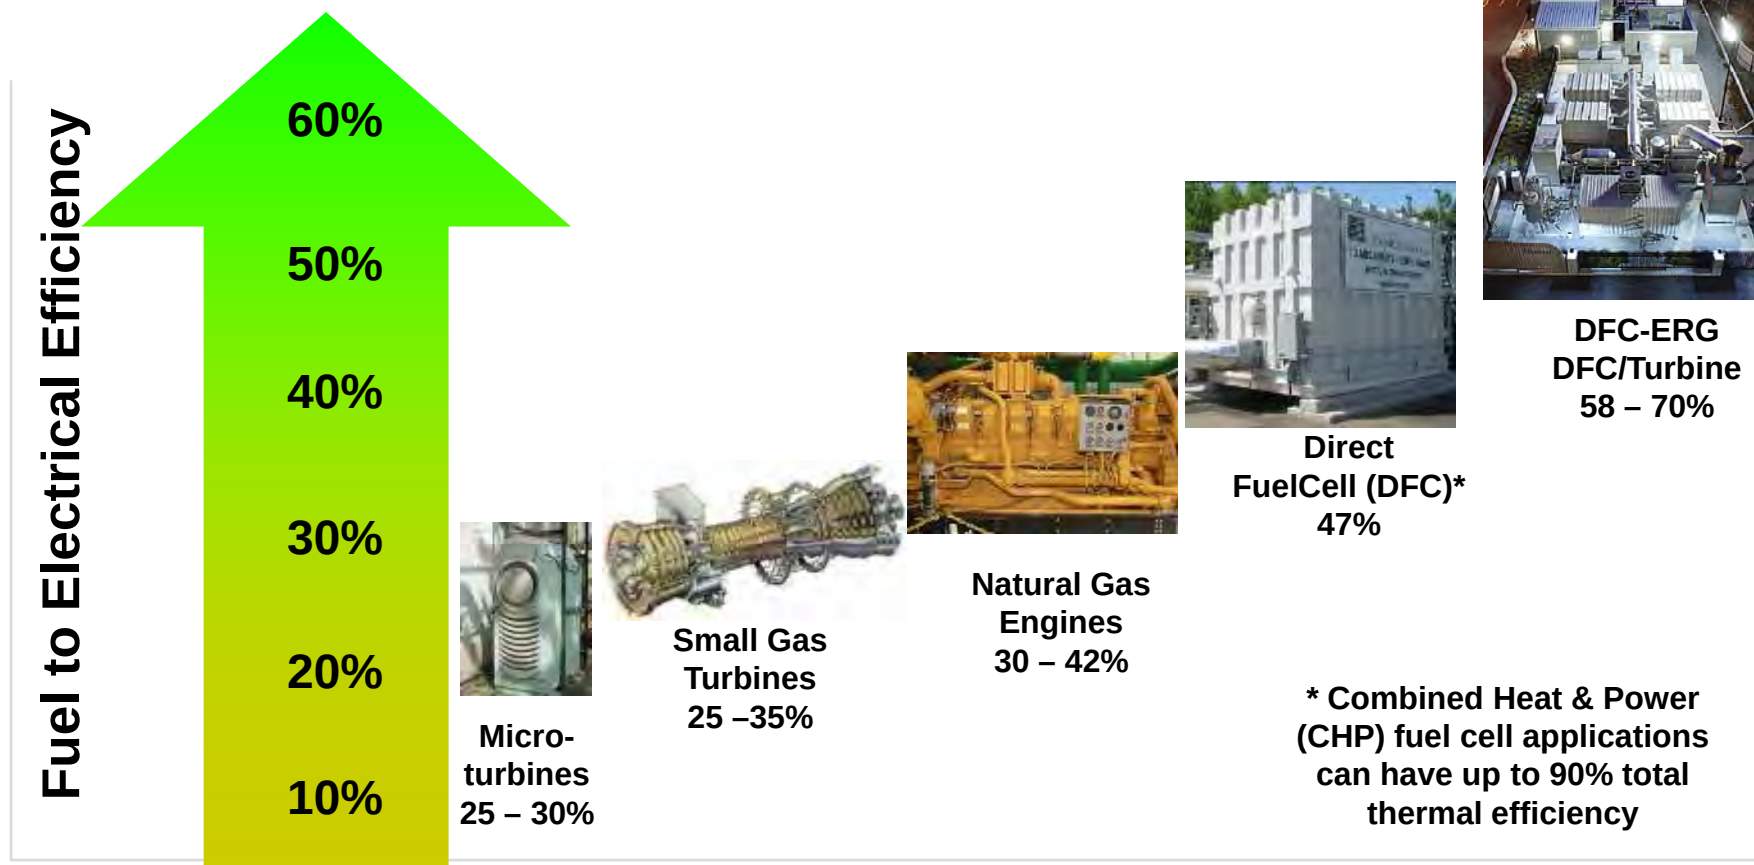

FuelCell Energy, the FuelCell Energy logo, Direct FuelCell and "DFC" are all registered trademarks (®) of FuelCell Energy, Inc.




FuelCell Energy

Fuels Diversity and Efficiency

FUEL RESOURCES

- NATURAL GAS
- PROPANE
- ETHANOL
- WASTE METHANE
- BIOGAS
- COAL GAS

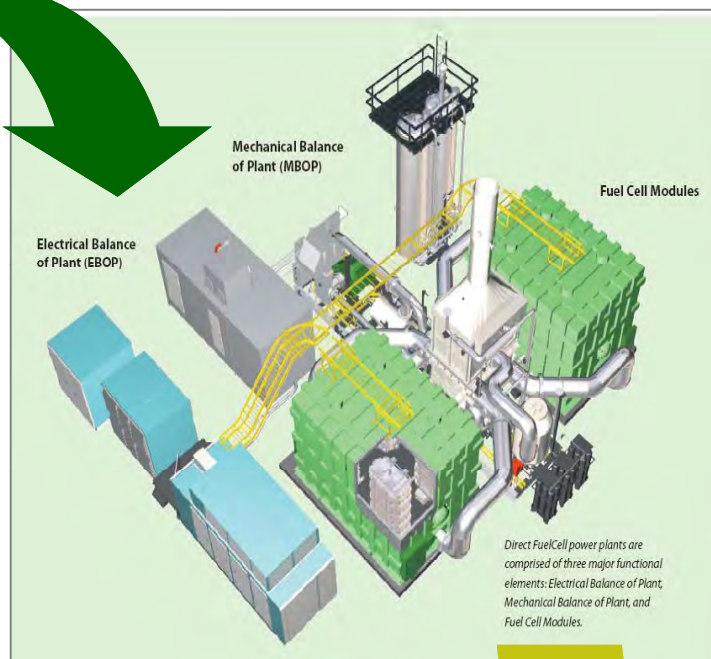

INTEGRATED SYSTEMS IMPROVE EFFICIENCY

- DFC – (47%)
- DFC – CHP (60-80%)
- DFC – ERG (55-60%)
- DFC/T – (55-60%)
- DFC H₂ (50-60%)

Diversity of Fuels plus High Efficiency – High Sustainability



	NOX (lb/MWh)	SOX (lb/MWh)	PM-10 (lb/MWh)	CO2 (lb/MWh)
Average US Grid	3.43	7.9	0.19	1,408
Average US Fossil Fuel Plant	5.06	11.6	0.27	2,031
Microturbine (60 kW)	0.44	0.008	.09	1,596
Small Gas Turbine (250 kW)	1.15	0.008	.08	1,494
DFC Fuel Cell 47% efficiency	0.01	0.0001	.00002	980
DFC Fuel Cell – CHP 80% efficiency	0.006	0.00006	.00001	552

Source for non-DFC data: “Model Regulations For The Output Of Specified Air Emissions From Smallscale Electric Generation Resources Model Rule and Supporting Documentation”, October 15, 2002; The Regulatory Assistance Project report to NREL



FuelCell Energy

DFC Advantages for Biogas

- **More power for given amount of biogas:** Higher efficiency than any other generation at typical digester facility sizes
- **Good heat to power ratio for digester support:** Fuel cell makes enough heat to support digester operation
- **Avoids generation of NO_x and other pollutants** from flare or from other generation technologies






Typical Fuels Composition

Composition	Natural Gas	Biogases			
		Waste Water	Food Waste	Animal Waste	Landfill
Methane (Vol%)	80-100	~50-60	~50-70	45-60	40-55
Carbon Dioxide (Vol%)	<3	30-40	25-45	35-50	35-50
Nitrogen (Vol%)	<3	<4	<4	<4	<20
Oxygen (Vol%)	<0.2	<1	<1	<1	<2
H ₂ S, ppm	<0.1	<400	<10000	<300	<200
Non-H ₂ S Sulfur, ppm	<10	<1	<1000	<30	<30
Halogens, ppm	<0.1	<0.2	<0.2	<0.2	<100
Moisture, %	<0.02	~3	~3	~3	~3



FuelCell Energy

Bio-gas Plants in North America

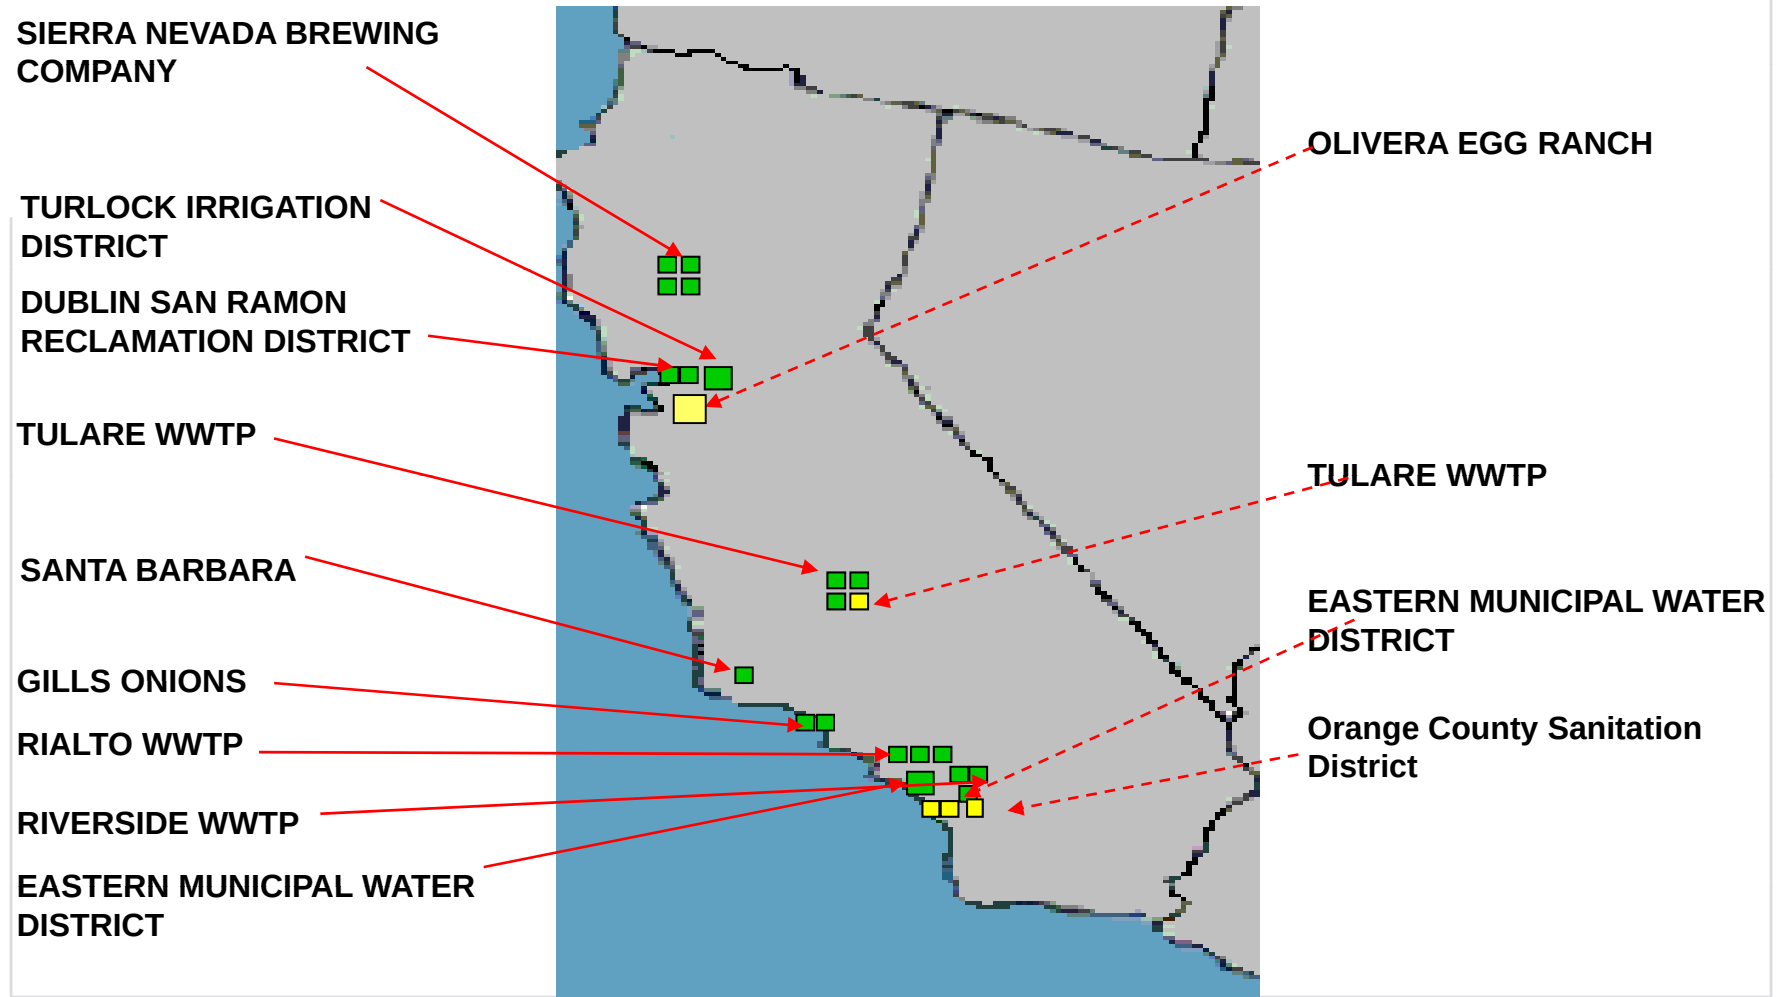

FuelCell Energy, the FuelCell Energy logo, Direct FuelCell and "DFC" are all registered trademarks (®) of FuelCell Energy, Inc.



FuelCell Energy

Tulare CA Wastewater Treatment Plant



- 3 DFC300 Units operating on ADG, provide ~ half of facility load
- 94% Availability from Jan 2008 through Aug 2010
- Recently ordered fourth unit



FuelCell Energy

4 DFC300 Plants Sierra Nevada Brewery, California



**Site With Power Generation in Excess of ADG Supply
First Site with Automated Fuel Blending**

FuelCell Energy, the FuelCell Energy logo, Direct FuelCell and "DFC" are all registered trademarks (®) of FuelCell Energy, Inc.



FuelCell Energy

Turlock Irrigation District Waste Water Treatment Facility, Turlock, CA



FuelCell Energy, the FuelCell Energy logo, Direct FuelCell and "DFC" are all registered trademarks (®) of FuelCell Energy, Inc.



FuelCell Energy

Gills Onion Food Processing Facility, Oxnard, CA



FuelCell Energy, the FuelCell Energy logo, Direct FuelCell and "DFC" are all registered trademarks (®) of FuelCell Energy, Inc.



FuelCell Energy

Eastern Municipal Water District Waste Water Treatment Facility, Moreno Valley, CA



FuelCell Energy, the FuelCell Energy logo, Direct FuelCell and "DFC" are all registered trademarks (®) of FuelCell Energy, Inc.



VOC Solvent Fuel.

Ford Motor Company, Ontario Assembly

- Challenge:
 - Cost-effectively dispose of VOC*
 - Reduce emissions in paint operations
- Solution:
 - 300 kW Ultra-Clean 24/7 reliable power running on VOC
- Results:
 - Low-cost, low-emissions electricity
 - VOC disposal cost cut in half over ten years



* Volatile Organic Compounds



FuelCell Energy

DFC-ERG High Efficiency Application

- DFC-ERG designed for pipeline letdown operations
 - Byproduct heat warms gas to prevent freezing
 - Energy from pressure letdown fed to turbine
 - Combined electricity delivered to the grid
- Improved economics and lower CO₂ emissions
- 2.2MW Toronto plant demonstrating technology and validating value proposition
 - Efficiency greater than 70%



2.2 MW DFC-ERG in Toronto



FuelCell Energy

Co-Production of Renewable Hydrogen Orange County, CA



Orange County
Sanitation
District (OCSD)

Renewable H₂
Filling Station

ADG fueled
DFC-H2®
Production Unit



Energy Efficiency &
Renewable Energy






FuelCell Energy

Co-Production of Renewable Hydrogen Orange County, CA

First DFC-H₂[®] Unit Installation

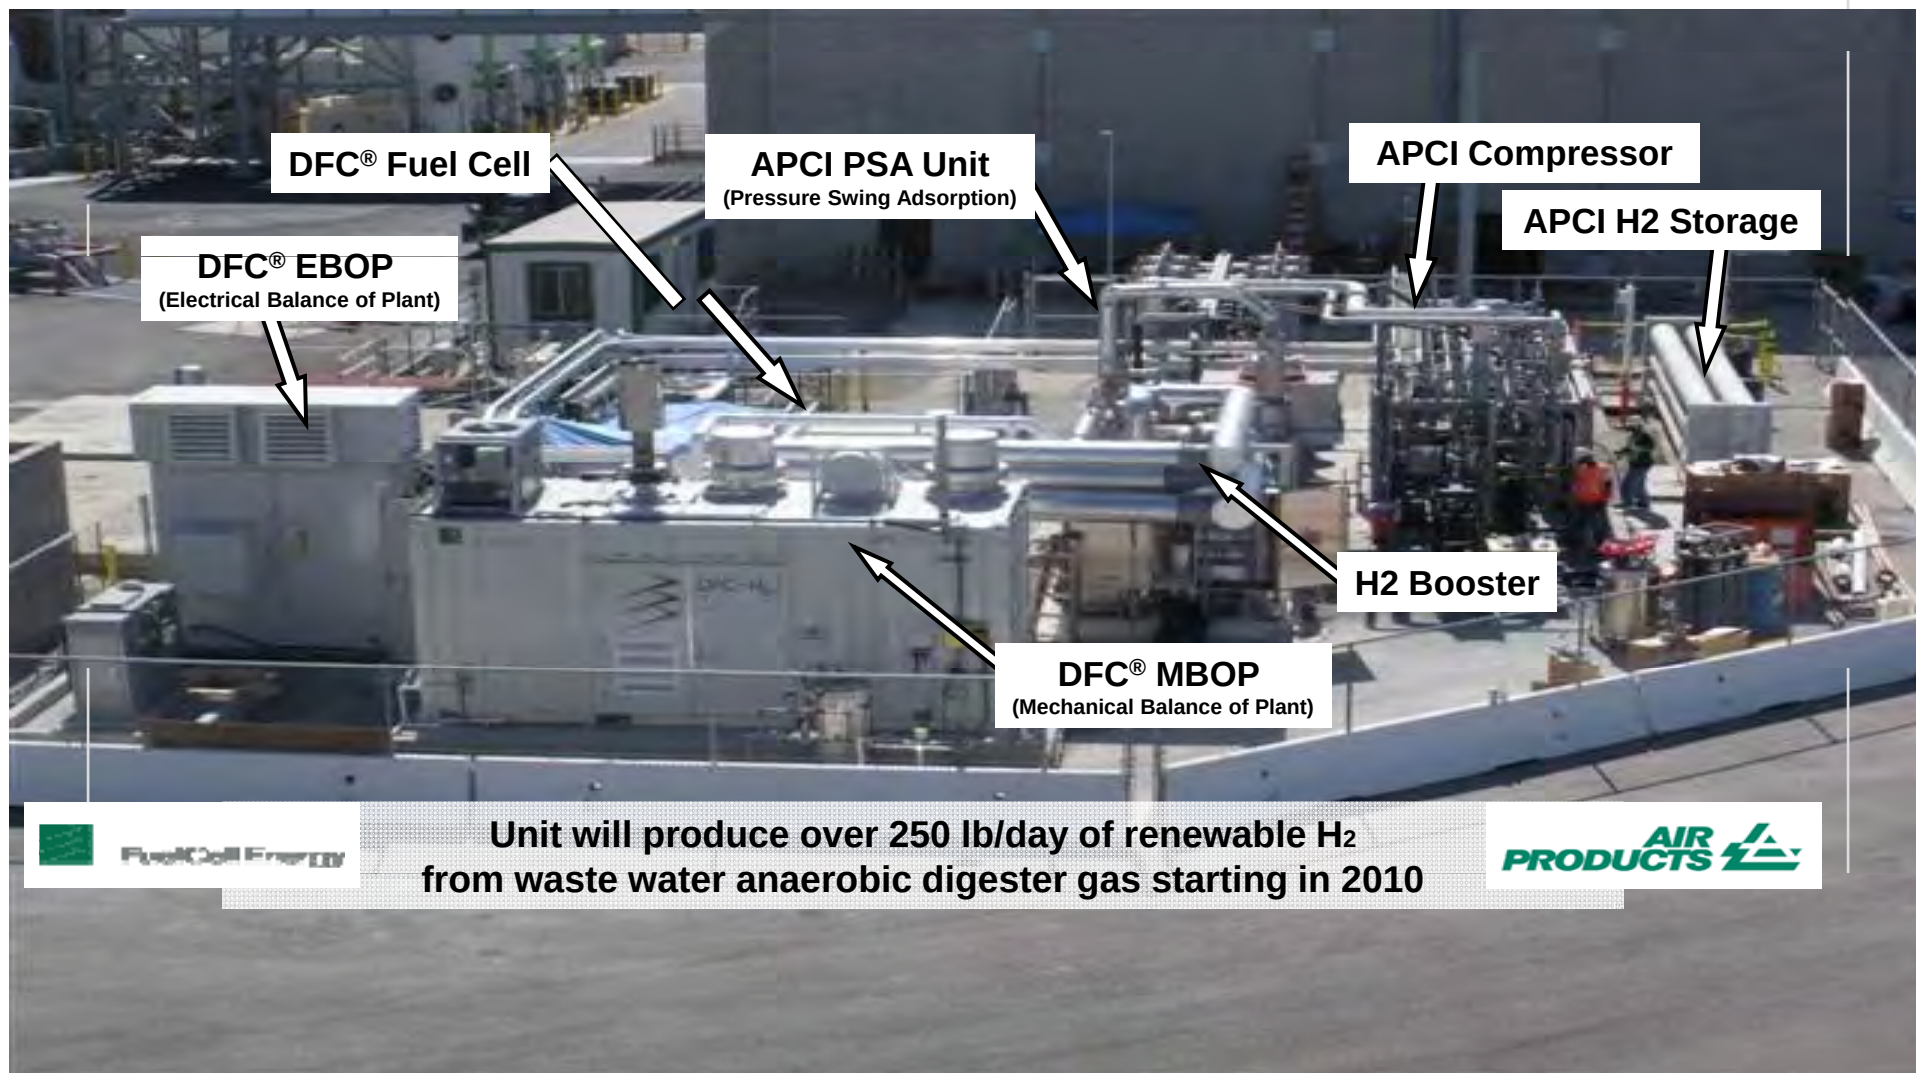




FuelCell Energy

Smart Grid Integration Power, Fuel and Energy Storage

DFC-H2® Peaker - Compliments Smart Grid

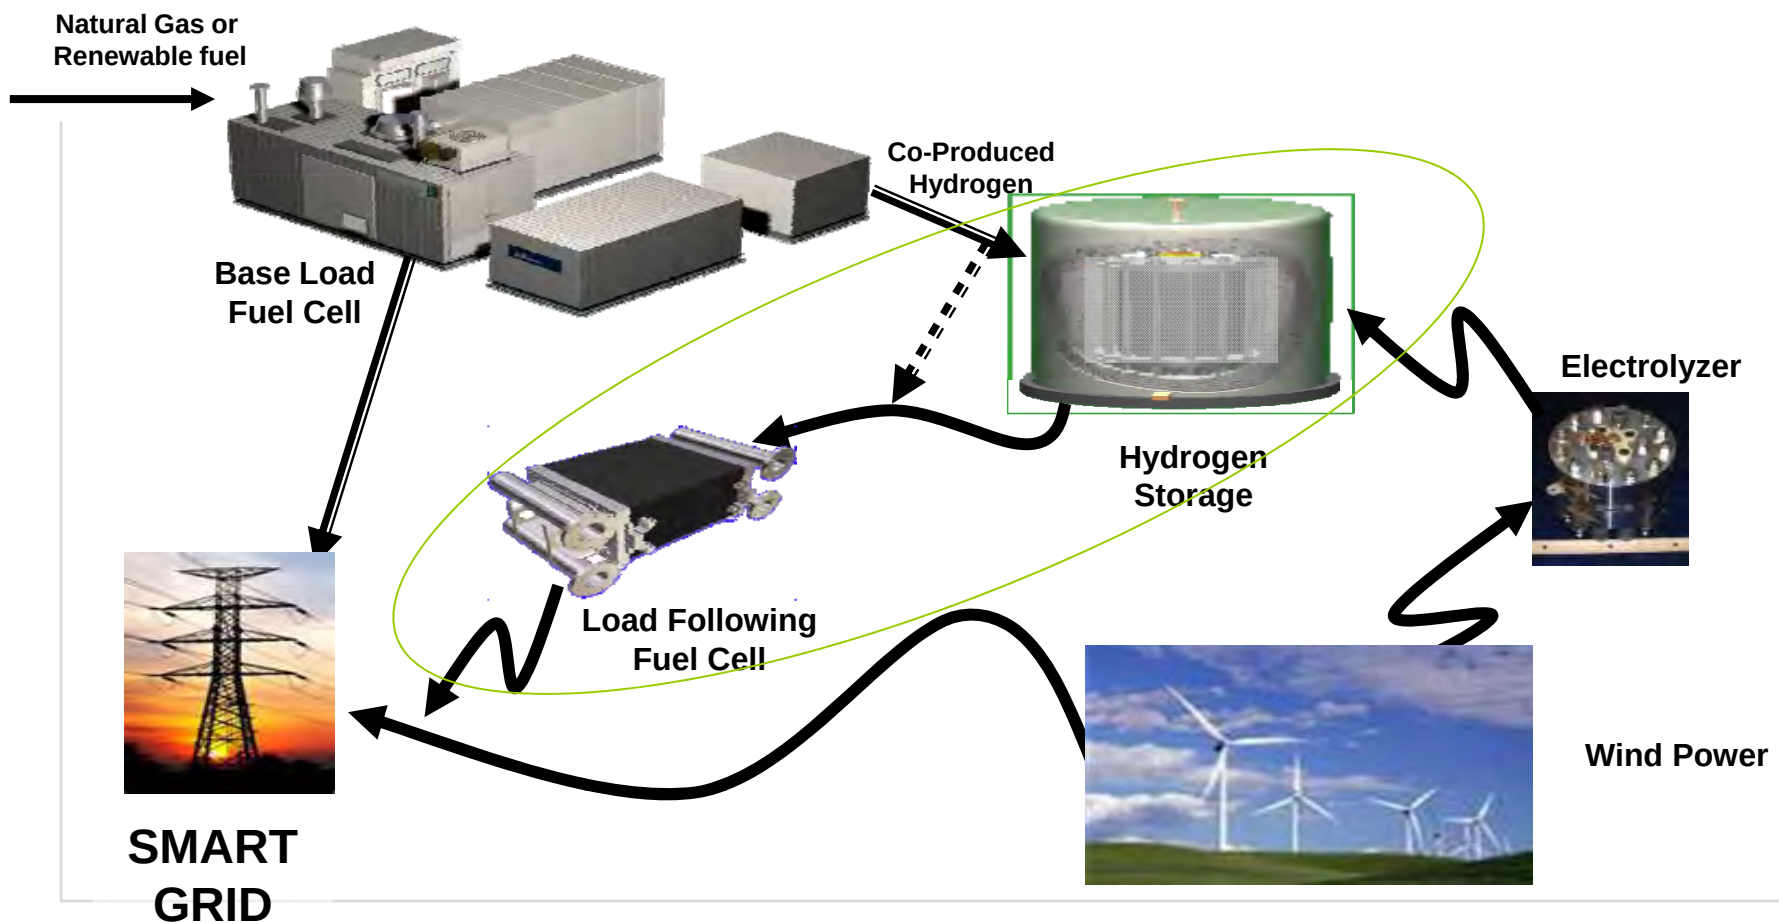

FuelCell Energy, the FuelCell Energy logo, Direct FuelCell and "DFC" are all registered trademarks (®) of FuelCell Energy, Inc.



FuelCell Energy

Co-Production Capacity of DFC-H₂[®] Power Plants

DFC300[®]



DFC1500[®]



DFC3000[®]



Co-product

Power, kW	250	1,000	2,000
Hydrogen, kg/day	125	500	1,000
Heat, mmBtu/hr	0.5	2.0	4.0

Peaker Capacity

Peak Power (8 hrs/day), kw	500	2,000	4,000
----------------------------	-----	-------	-------

Refueling Capacity

Fuel Cell Cars, 0.5 kg/day	300	1,200	2,400
----------------------------	-----	-------	-------