

UNCLASSIFIED

AD NUMBER
ADB058960
NEW LIMITATION CHANGE
TO Approved for public release, distribution unlimited
FROM Distribution authorized to U.S. Gov't. agencies and their contractors; Specific Authority; JUL 1981. Other requests shall be referred to Commander, Army Armament Research and Development Command, Attn: DRDAR-TSB. Aberdeen Proving Ground, MD 21005.
AUTHORITY
AMSRL-CS-IO-SC [380] ltr dtd 1 Nov 2001

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD NUMBER
ADB058960
NEW LIMITATION CHANGE
TO Distribution authorized to U.S. Gov't. agencies and their contractors; Specific Authority, Jul 1981. Other requests must be referred to Commander, Army Armament Research and Development Command, Attn: DRDAR-TSB. Aberdeen Proving Ground, MD 21005.
FROM Distribution authorized to U.S. Gov't. agencies only; Test and Evaluation; Jul 1981. Other requests must be referred to Commander, Army Armament Research and Development Command, Attn: DRDAR-TSB. Aberdeen Proving Ground, MD 21005.
AUTHORITY
ARBRL, per DTIC Form 55, dtd Jul 1981

THIS PAGE IS UNCLASSIFIED

LEVEL

2
155

AD

AD B058960

MEMORANDUM REPORT ARBRL-MR-03115

6 BLAST COMPUTATIONS OVER A
HEMICYLINDRICAL AIRCRAFT SHELTER.

10 John D. Wortman

20030422083

11 July 1981

12
54

DTIC
ELECTE
AUG 18 1981

9 Final rept.

16 16162618 ASD



US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND
BALLISTIC RESEARCH LABORATORY
ABERDEEN PROVING GROUND, MARYLAND

Distribution limited to US Government agencies only; Test and
Evaluation; J. L. H. Other requests for this document must be
referred to Director, USA Ballistic Research Laboratory.
ATTN: DRDAR-TSB, Aberdeen Proving Ground, Maryland 21005.

DTIC FILE COPY

81 8 18 3 93 471
0 68

Destroy this report when it is no longer needed.
Do not return it to the originator.

Secondary distribution of this report by originating
or sponsoring activity is prohibited.

Additional copies of this report may be obtained
from the Defense Technical Information Center, Cameron
Station, Alexandria, Virginia 22314.

The findings in this report are not to be construed as
an official Department of the Army position, unless
so designated by other authorized documents.

The use of trade names or manufacturers' names in this report
does not constitute endorsement of any commercial product.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER MEMORANDUM REPORT ARBRL-MR-03115	2. GOVT ACCESSION NO. AD-B058 9606	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) BLAST COMPUTATIONS OVER A HEMICYLINDRICAL AIRCRAFT SHELTER	5. TYPE OF REPORT & PERIOD COVERED Final	
7. AUTHOR(s) John D. Wortman	6. PERFORMING ORG. REPORT NUMBER	
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Army Ballistic Research Laboratory ATTN: DRDAR-BLT Aberdeen Proving Ground, MD 21005	8. CONTRACT OR GRANT NUMBER(s)	
11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army Armament Research & Development Command U.S. Army Ballistic Research Lab. (DRDAR-BLT) Aberdeen Proving Ground, MD 21005	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS RDT&E 1L162618AH80	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	12. REPORT DATE JULY 1981	
	13. NUMBER OF PAGES 54	
	15. SECURITY CLASS. (of this report) UNCLASSIFIED	
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Distribution limited to US Government agencies only; Test and Evaluation; Jul 1981 Other requests for this document must be referred to Director, US Army Ballistic Research Laboratory, ATTN: DRDAR-TSB, Aberdeen Proving Ground, MD 21005.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Aircraft Shelter Model Finite Difference Shock Impingement HULL-Experiment Comparisons HULL LAMB Three Dimensional Hydrocode		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report describes a three dimensional, finite difference hydrocode (HULL) simulation of an experiment for blast leakage into a hardened aircraft shelter model. The computer program uses LAMB subroutines to simulate the blast wave and HULL to solve the hydrodynamic equations. Experimental and computed pressure-time results are compared. Some additional HULL results are shown and advantages and difficulties are discussed.		

DD FORM 1 JAN 75 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

TABLE OF CONTENTS

	Page
LIST OF ILLUSTRATIONS	5
I. INTRODUCTION	7
II. COMPUTATIONAL PROCEDURE	8
A. Test Model	8
B. Computational Grid and Boundary Conditions	9
III. RESULTS	10
A. Overpressures Inside the Shelter	10
B. Free Field Overpressures	11
C. Isobars and Vector Plots	11
IV. COMMENTS AND CONCLUSIONS	12
APPENDIX	15
A. HULL and LAMB	17
DISTRIBUTION LIST	43

Accounting for
 1944-1945
 1946-1947
 1948-1949
 1950-1951
 1952-1953
 1954-1955
 1956-1957
 1958-1959
 1960-1961
 1962-1963
 1964-1965
 1966-1967
 1968-1969
 1970-1971
 1972-1973
 1974-1975
 1976-1977
 1978-1979
 1980-1981
 1982-1983
 1984-1985
 1986-1987
 1988-1989
 1990-1991
 1992-1993
 1994-1995
 1996-1997
 1998-1999
 2000-2001
 2002-2003
 2004-2005
 2006-2007
 2008-2009
 2010-2011
 2012-2013
 2014-2015
 2016-2017
 2018-2019
 2020-2021
 2022-2023
 2024-2025
 2026-2027
 2028-2029
 2030-2031
 2032-2033
 2034-2035
 2036-2037
 2038-2039
 2040-2041
 2042-2043
 2044-2045
 2046-2047
 2048-2049
 2050-2051
 2052-2053
 2054-2055
 2056-2057
 2058-2059
 2060-2061
 2062-2063
 2064-2065
 2066-2067
 2068-2069
 2070-2071
 2072-2073
 2074-2075
 2076-2077
 2078-2079
 2080-2081
 2082-2083
 2084-2085
 2086-2087
 2088-2089
 2090-2091
 2092-2093
 2094-2095
 2096-2097
 2098-2099
 2100-2101
 2102-2103
 2104-2105
 2106-2107
 2108-2109
 2110-2111
 2112-2113
 2114-2115
 2116-2117
 2118-2119
 2120-2121
 2122-2123
 2124-2125
 2126-2127
 2128-2129
 2130-2131
 2132-2133
 2134-2135
 2136-2137
 2138-2139
 2140-2141
 2142-2143
 2144-2145
 2146-2147
 2148-2149
 2150-2151
 2152-2153
 2154-2155
 2156-2157
 2158-2159
 2160-2161
 2162-2163
 2164-2165
 2166-2167
 2168-2169
 2170-2171
 2172-2173
 2174-2175
 2176-2177
 2178-2179
 2180-2181
 2182-2183
 2184-2185
 2186-2187
 2188-2189
 2190-2191
 2192-2193
 2194-2195
 2196-2197
 2198-2199
 2200-2201
 2202-2203
 2204-2205
 2206-2207
 2208-2209
 2210-2211
 2212-2213
 2214-2215
 2216-2217
 2218-2219
 2220-2221
 2222-2223
 2224-2225
 2226-2227
 2228-2229
 2230-2231
 2232-2233
 2234-2235
 2236-2237
 2238-2239
 2240-2241
 2242-2243
 2244-2245
 2246-2247
 2248-2249
 2250-2251
 2252-2253
 2254-2255
 2256-2257
 2258-2259
 2260-2261
 2262-2263
 2264-2265
 2266-2267
 2268-2269
 2270-2271
 2272-2273
 2274-2275
 2276-2277
 2278-2279
 2280-2281
 2282-2283
 2284-2285
 2286-2287
 2288-2289
 2290-2291
 2292-2293
 2294-2295
 2296-2297
 2298-2299
 2300-2301
 2302-2303
 2304-2305
 2306-2307
 2308-2309
 2310-2311
 2312-2313
 2314-2315
 2316-2317
 2318-2319
 2320-2321
 2322-2323
 2324-2325
 2326-2327
 2328-2329
 2330-2331
 2332-2333
 2334-2335
 2336-2337
 2338-2339
 2340-2341
 2342-2343
 2344-2345
 2346-2347
 2348-2349
 2350-2351
 2352-2353
 2354-2355
 2356-2357
 2358-2359
 2360-2361
 2362-2363
 2364-2365
 2366-2367
 2368-2369
 2370-2371
 2372-2373
 2374-2375
 2376-2377
 2378-2379
 2380-2381
 2382-2383
 2384-2385
 2386-2387
 2388-2389
 2390-2391
 2392-2393
 2394-2395
 2396-2397
 2398-2399
 2400-2401
 2402-2403
 2404-2405
 2406-2407
 2408-2409
 2410-2411
 2412-2413
 2414-2415
 2416-2417
 2418-2419
 2420-2421
 2422-2423
 2424-2425
 2426-2427
 2428-2429
 2430-2431
 2432-2433
 2434-2435
 2436-2437
 2438-2439
 2440-2441
 2442-2443
 2444-2445
 2446-2447
 2448-2449
 2450-2451
 2452-2453
 2454-2455
 2456-2457
 2458-2459
 2460-2461
 2462-2463
 2464-2465
 2466-2467
 2468-2469
 2470-2471
 2472-2473
 2474-2475
 2476-2477
 2478-2479
 2480-2481
 2482-2483
 2484-2485
 2486-2487
 2488-2489
 2490-2491
 2492-2493
 2494-2495
 2496-2497
 2498-2499
 2500-2501
 2502-2503
 2504-2505
 2506-2507
 2508-2509
 2510-2511
 2512-2513
 2514-2515
 2516-2517
 2518-2519
 2520-2521
 2522-2523
 2524-2525
 2526-2527

PRECEDING PAGE BLANK-NOT FILMED

LIST OF ILLUSTRATIONS

Figure	Page
1. Sketch of the test set-up for which computation was performed	19
2. Schematic of pressure gauge locations for test	20
3. Computational grid on front of aircraft shelter model . .	21
4a. Comparison of measured and HULL predicted overpressure at gauge position 1	22
4b. Comparison of measured and HULL predicted overpressure at gauge position 2	23
4c. Comparison of measured and HULL predicted overpressure at gauge position 3	24
4d. Comparison of measured and HULL predicted overpressure at gauge position 4	25
4e. Comparison of measured and HULL predicted overpressure at gauge position 5	26
4f. Comparison of measured and HULL predicted overpressure at gauge position 10	27
4g. Comparison of measured and HULL predicted overpressure at gauge position 6	28
4h. Comparison of measured and HULL predicted overpressure at gauge position 7	29
4i. Comparison of measured and HULL predicted overpressure at gauge position 8	30
4j. Comparison of measured and HULL predicted overpressure at gauge position 9	31
5a. Predicted HULL overpressure in a cell just in front of the open door of the model	32
5b. Predicted HULL overpressure in the back corner of the model	33

LIST OF ILLUSTRATIONS (Continued)

Figure		Page
6.	Comparison of measured free field overpressure 289 cm from ground zero and HULL predicted overpressure in two cells containing points at that distance but of different size and shape	34
7.	HULL generated isobars in the bottom computational plane at 5 ms.	35
8.	HULL generated isobars in the vertical plane adjacent to the $y=0$ symmetry boundary	36
9a.	HULL generated isobars near the floor of the model at 5 ms	37
9b.	HULL generated isobars near the floor of the model at 6 ms	38
9c.	HULL generated isobars near the floor of the model at 7 ms	39
10a.	HULL generated velocity vector plots near the floor of the model at 5 ms	40
10b.	HULL generated velocity vector plots near the floor of the model at 6 ms	41
10c.	HULL generated velocity vector plots near the floor of the model at 7 ms	42

I. INTRODUCTION

Necessity or expediency sometimes forces stockpiles of explosive munitions to be stored in the vicinity of highly vulnerable targets such as aircraft. Often one takes measures to protect the aircraft by housing them in various hangar-like buildings. This protection permits more efficient use of space by allowing a higher aircraft storage density. A particular kind of aircraft storage shelter used in Europe is one that is hemicylindrical in shape with doors that slide sideways at the ends (Quonset hut shape). In an effort to quantify the measure of protection afforded aircraft, BRL has undertaken the task of measuring the blast environment that marked aircraft would experience when a munitions detonation occurs nearby. The experimental portion of the task was performed by Kingery¹ and measurements at various locations inside and outside the shelter model are reported for a number of different door openings and shock obliquity impingements.

This report describes a complementary computational effort on the same problem. It serves as a difficult test for the HULL^{2,3} hydrocode in a further attempt to validate its predictive capability for three dimensional problems. Previous computations with HULL proved extremely fruitful. Shock impingements of various strengths and obliquities on an S-280 Electronic Equipment Shelter model are discussed in References 4, 5, and 6. Comparisons with shock tube experiments on the model show very good agreement. Similar computations were performed for shock

¹ Kingery, C.N., "Blast Leakage Into a Hardened Aircraft Shelter Model", (to be published as a BRL Report), U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD.

² Fry, M.A., Durrett, R.E., Ganong, G.P., Matuska, D.A., Stucker, M.D., Chambers, B.S., Needham, C.E., and Westmoreland, C.D., "The HULL Hydro-dynamics Computer Code", AFWL-TR-76-183, U.S. Air Force Weapons Laboratory, Kirtland Air Force Base, NM (September 1976).

³ Hasdal, J.A., Chambers, B.S., Clemens, R.W., "Support to BRL: HULL Code Implementation on a CDC 7600", SAI-80-701-AQ, Science Applications Inc., McLean, VA (August 1979).

⁴ Lottero, R.E., "Comparison of 3-D Hydrocode Computations for Shock Diffraction Loading on an S-280 Electrical Equipment Shelter", ARD Report 80-3, Proceedings of the 1980 Army Numerical Analysis and Computers Conference (August 1980).

⁵ Lottero, R.E., "Detailed Comparison of 3-D Hydrocode Computation for Shock Diffraction Loading on an S-280 Electrical Equipment Shelter", (to be published as a BRL Report), U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD.

⁶ Lottero, R.E., Wortman, J.D., Bertrand, B.P., and Kitchens, C.W., "Oblique Interaction of a Shock Wave with a Three-Dimensional Simple Structure, Part I", (to be published as a BRL Report), U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD.

impingements on open structures⁷. From the pressure differences between the outside and inside walls, one can draw conclusions as to vulnerability of the structure. In all these problems the shock input was of the constant pressure (step shock) type. The present computation uses LAMB⁸, a code based on a standard 1 KT nuclear blast⁹, to generate a decaying blast wave to simulate the wave generated in the experiment. Pressure-time results are compared at the various measuring stations in the floor of the model and regions of focused (high) pressure are correlated and pointed out.

II. COMPUTATIONAL PROCEDURE

A. Test Model

In order to convey the ideas for the computational model, a brief description of the test performed on the scale model is given here. The experiments are described more completely in Reference 1.

The test structure is a 1/42 scale model of a U.S. third generation semi-hardened aircraft shelter. There were several different experimental configurations. The computation in this report compares with the particular conditions depicted in Figure 1. For this test, there are two models: Model A with its longitudinal axis aligned with the charge burst point and its partially open end facing the burst, and Model B at an angle of 90° to the burst. The computational simulation is concerned only with Model A. The test models were 87.1 cm long sections of pipe with an inside diameter of 57.4 cm that had floors welded somewhat above the center. The resulting inside dimensions were 54.8 cm across the floor and 20.09 cm high. These models were buried so the floors were level with the ground. The front of Model A had a centered slot opening from the roof to the floor that was 30% of the front (presented) cross-sectional area of 809.3 cm². Ten pressure gauges were located on the floor as indicated in Figure 2. There were also two free field pressure gauges, labeled F1 and F2, located 183 cm and 289 cm from ground zero, respectively (see Figure 1). A charge of .758 kg of TNT was used to produce a nominal 103 kPa (15 psi) blast wave at 289 cm (the distance from ground zero to gauge F2 and the inside center of the front wall of Model A). This scaled charge-distance relationship represents 56,181 kg of TNT at a distance of 121.5 m.

⁷ Wortman, J.D., Kitchens, C.W., and Lottero, R.E., "Prediction of 3-D Blast Loading on a Partially Open Industrial Building: Feasibility Study", (to be published as a BRL Memorandum Report), U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD.

⁸ C.E. Needham and L.A. Wittwer, "The Air Force Weapons Laboratory Low Altitude Multiple Burst (LAMB) Model", AFWL-DYT-75-2 (unpublished).

⁹ Needham, C.E., Havens, M.L., and Knauth, C.S., "Nuclear Blast Standard (1 KT)", AFWL-TR-73-55 (Rev.) U.S. Air Force Weapons Lab., Kirtland Air Force Base, NM (April 1975).

B. Computational Grid and Boundary Conditions

HULL grid cells are parallelepiped shaped only. Although this is a drawback when attempting to model complicated geometry, many structures of interest to the Army can be represented with reasonable computational accuracy. The original intent for this project was to carry out the computation with a coarse grid and then repeat the computation with a finer mesh. The assignment of the grid was complicated by the need to follow the curvature of the roof, have the proper cross-sectional area, and have a slot door opening that was 30% of this area. The cells in the region of interest, the aircraft shelter model and immediate vicinity, were all about 3 cm by 2 cm by 3 cm. This was smaller than we originally intended, but the smallest cell face was still about five times larger than the gauge faces. However, in view of the relatively good comparison between the computations and the experiment, it was felt that a recomputation with smaller cells was not warranted at this time. We took advantage of symmetry to cut the modeled region in half. The computational region is sketched in Figure 1. Figure 3 shows a sketch of the front of the computational shelter model showing the end of the stair step representation for the curved roof and the closed and open portions of the front.

The faces of cells within the shelter and nearby had a 3 to 2 aspect ratio. This increased gradually with distance from the shelter. The 65 mesh spaces in the x direction diminished from 8.998 cm at $x = 0$ to 3.03 cm at the shelter model and gradually increased beyond the shelter model to 10.394 cm at $x = 289$ cm. The 31 mesh spaces in the y direction varied from 2.03 cm at $y = 0$ (the model center) to 32.842 cm at $y = 243$ cm. The 32 mesh spaces in the z direction varied from 2.85 cm at $z = 0$ (the model floor) to 35.394 cm at $z = 243$ cm. The resulting grid contained 64,480 cells.

The boundaries were placed to allow at least 3.5 milliseconds between shock arrival at the shelter and the arrival of any spurious signal from the boundaries. (This time was based on the crude assumption that all signals traveled at the shock velocity.) For example, when the reflected shock from the aircraft shelter reaches the LAMB input boundary at $x = 0$ the computation at this boundary becomes meaningless. Spurious waves are then propagated back toward the shelter. To a lesser extent the interaction between the shock wave and the transmissive boundaries (the x boundary at 289 cm and the y and z boundaries at 243 cm) produce a similar false reflection. All the outer boundaries were treated as transmissive which in HULL is an extrapolative scheme where boundary cells are given the same values as their inside neighbors. The bottom boundary at $z = 0$ and the boundary at $y = 0$ were treated as perfectly reflective. The one cell thick walls of the shelter model were designated ISLAND cells, which are also totally reflective. The LAMB input boundary at $x = 0$ was simulated with a virtual external row of cells that were assigned hydrodynamic values specified by LAMB as functions of time and location.

A 1.2767×10^{-6} KT burst was assumed at the external point (x,y,z) = (-144.5,0,0). This yield was chosen so that LAMB calculations would match the experimental free field gauge peak overpressure of 97.5 kPa at 2.89 meters from the burst point.

The HULL calculations were initiated at time = 2.455 ms with the shock front about 2 cells in front of the shelter. Initial hydrodynamic values at, and behind, the shock wave were supplied by LAMB. Ambient values were inserted in front of the shock to simulate undisturbed air. Then the HULL calculations proceeded with LAMB values using input through the $x = 0$ boundary.

III. RESULTS

The main purpose of this work was to make quantitative comparisons between experiments and HULL computations. As a necessary byproduct a decaying wave capability was introduced into HULL to simulate a three dimensional free field blast (see the APPENDIX). Overpressures were recorded as functions of time in the experimental series at the ten labeled locations in Figure 2. These were all on the floor of the model. These experimental pressure records are compared with HULL predictions in Figures 4a through 4j. The zero time for each experimental plot is the time of arrival of the shock wave at the transducer location. Since the experiment and the HULL calculation did not have the same reference time, a time shift for the HULL results was selected by matching the points of inflection on the leading edge of the pressure-time histories at Position 1 (see Figure 2) just inside the open door. This time shift of -0.63 ms in the HULL results was applied to each computed waveform inside the shelter.

A. Overpressures Inside the Shelter

In general, the computed HULL overpressures match the experimental records fairly well, although the computed values do not exhibit the high frequency response evident in the experiments. There are at least two reasons for this: First, the transducers in the experiment exhibit some noise (ringing) and it is sometimes difficult to differentiate the true pressure peaks from noise peaks. Second, the computational cell size is larger than the sensitive area of a typical transducer; this causes an "average" value to be computed and thus rounds the peaks.

The comparison at gauge A-1 (Figure 4a) near the narrow door is the poorest. The peak pressure of 104 kPa recorded here at 291 cm from ground zero is higher than the 97.5 kPa recorded with the free field gauge at 289 cm from ground zero. However, it is difficult to tell whether the peak of 104 kPa is a true peak or noise. If it were noise, the average value approximates 97.5 kPa more closely. On the other hand, we could be seeing the effects of reflections within the door opening itself in which case the multiple peaks would be real. Finally, it is not known to what extent viscous effects, which HULL ignores, influence the flow in the narrow opening.

The experiment recorded a significantly higher peak pressure at gauge A-8 than at A-9 which is in the center of the building near the back wall (see Figures 4i and 4j, respectively), where HULL recorded nearly equal pressures. This is because the experimental model had a small opening in the back near the center gauge and this opening was omitted from the computer model.

The highest computed overpressure inside the model was 97.6 kPa in the back corner near the floor. This points to a problem of shock focusing and should be brought to the attention of the shelter user.

We include examples of HULL generated plots for computed overpressure at two additional stations. Figure 5a shows the overpressure in a cell on the ground, in front of the building, at the center of the opening. This shows the strong reflected shock from the front of the building and later the reflected shock through the opening from the back of the model. Figure 5b shows the overpressure in the back corner of the model where HULL predicted a high pressure.

B Free Field Overpressures

Two HULL sampling stations were located 289 cm from ground zero, the same distance as free field gauge F-2. Both of these were in large cells. One station was in a cell about 3.5 by 13 by 3 centimeters on a side (cells inside the shelter model were about 3 by 2 by 3 cm). Its center was 289.7 cm from ground zero and the radial distance across it was about 7.8 cm. The second station was in a larger cell, 6.5 by 27 by 3 cm. Its center was 283.4 cm from ground zero and the radial distance across it was nearly 24 cm. This latter cell was more than half engulfed in the shock wave at the start of the computation. In Figure 6 the overpressure records from these two cells are superposed over the experimental record from free field gauge F-2. Beyond the initial peak, both HULL results are good approximations.

C. Isobars and Vector Plots

Although isobars generally indicate only qualitative results, they are instructive because they show the progression of shock waves, formation of vortices, and point to complex shock patterns such as Mach stems, triple points, etc. Figure 7 shows isobars at 5 ms in the bottom computation plane. Figure 8 shows isobars in the vertical plane adjacent to the $y = 0$ symmetry boundary at the same time. The walls of the model are outlined as a low contour value. The interpolation for this contour tends to thicken the apparent walls. The straight sections of the isobars near the transmissive boundaries is due to the large size of the cells and the extrapolation-type boundary condition used there. The scallops in the isobars are caused by interpolation between the centers of large cells.

Figures 9a through 9c show three isobar plots along the floor of the model. The high pressure region that forms and sweeps along the wall and floor is pointed out by the half-rounded contours in Figure 9a. This causes the sharp pressure spike in Figure 4f.

Velocity vector plots indicate the magnitude and direction of the moving gas. Figures 10a through 10c, with times corresponding to Figures 9a through 9c, clearly show a vortex generated just inside the door of the model.

The maximum pressures inside the model occur at the door when the shock front first enters and at the back wall when the shock front reflects from it at about 6 ms. The maximum velocities occur at the open door when the shock wave first enters, but high velocities are evident in the middle of the model in Figures 10a and 10b. A complete flow reversal, due to an inward traveling rarefaction wave, will cause debris and cargo stored inside the shelter to pile near the open door.

IV. COMMENTS AND CONCLUSIONS

It is evident that the HULL computations can be used to help plan further experiments, to aid in interpreting experimental results, and to fill gaps in experimental studies.

Except for the sharp peaks and valleys in the pressure records, the computed pressures in this study were a good approximation to the experimental pressures at most of the test locations. Such results would probably be quite adequate for structural response analyses. The rounding of the peaks in HULL is caused by the diffusion of the difference method and by the fact that HULL computes average values in each cell. Depending on time and expense, we could force HULL to define the peaks more sharply by using a finer mesh. In our present case we had cells of about 3 by 2 by 3 centimeters in the shelter region. The HULL run required about 1½ hours of the CDC 7600 CPU time to simulate 5.5 ms of real time. If we simply filled the same space with proportionally reduced cells so the smaller cells were cubes 1 cm on a side (this would approach the pressure gauge size) and repeated the run, it would take roughly 36 times as long for 18 times as many cells and half the time step. The resulting 54 hours of CDC 7600 computer time is prohibitive for most purposes. There are many factors which affect the rate at which HULL solves a problem. The present case averaged .32 ms per cell per cycle. (The time step for a cycle is one-half the smallest cell dimension divided by the shock velocity.)

HULL runs require a lot of personnel time. The present project took several man months with most of that time spent on code checking and modifications. Barring unforeseen difficulties it is estimated that it would take two or three weeks to do a preliminary study (e.g.

LAMB runs to establish yield, initiation time, initial conditions, etc.) and set up the grid with proper boundaries, sampling stations, etc. for a similar computation for a different building. Actual running of the KEEL (program which sets up a HULL computation) and HULL codes does not take much personnel time, but the results, particularly from the KEEL run, should be checked at each stage. The most useful form of HULL output is obtained through plots. Analysis of these plots and correlation with experimental data is time consuming. Some time must also be devoted to the management of files. For this project the final restart file contained 19 restart dumps and over 6,000,000 words. This large amount of data must be manipulated carefully in order to properly interpret the computed results and to make comparisons with experimental pressure records.

ACKNOWLEDGMENT

The author would like to acknowledge the assistance of Andrew Mark for his many improvements to the content of this report.

APPENDIX A
HULL and LAMB.

RECORDING DATE BLANK-NOT FILMED

The HULL^{2,3} (Air Force Weapons Laboratory version 8) code used for this computation is an air blast version received at the BRL in September, 1978. It was modified by Science Applications Inc. under contract to the BRL⁸ to run on the CDC 7600 at the BRL. Other changes by SAI and BRL personnel introduced the optional input of an oblique "step" shock and the replacement of the preprocessor SAIL¹⁰ by a combination of the CDC utility UPDATE and the SAI program POST. These maintain and update files and select the particular coding for a given run. This collection of coding, which we loosely refer to as HULL, is a number of related programs and subroutines. The program of principal interest, called HULL, does the hydrodynamic calculations.

The program HULL is also really a collection of programs and subprograms. In particular, the three-dimensional (3-D) and two-dimensional (2-D) programs are different. The 2-D version is older. There are a number of options for the 2-D HULL version which are not in the 3-D version. The desired options for any run are selected through input control parameters. The results reported in this report are from the 3-D version and the changes and comments discussed apply only to the 3-D version.

The HULL hydrocode uses an explicit time-step scheme (in the spirit of Lax-Wendroff) to solve the inviscid Euler equations. This computation is carried out in two phases: first a Lagrangian calculation "steps" velocity and energy forward in time, and then an Eulerian transport phase computes the mass movement between cells and adjusts the energy and velocity accordingly. The hydrodynamic variables stored for each computational cell for 3-D runs are the three components of velocity, the specific internal energy, and the mass of material in the cell. The other hydrodynamic variables needed for the solution are density, total specific energy, pressure, and the "effective" gamma (ratio of specific heats of the gas). The average density in the cell is found from the mass and dimensions of the cell. The total specific energy is computed from the velocity and internal energy. The pressure and effective gamma are supplied by the equation of state.

The HULL program runs are preceded by a KEEL run which sets up the computational grid and the initial conditions. The computational grid consists of rectangular parallelepiped cells set off by orthogonal parallel planes. For 3-D runs, the contents of a cell is either AIR or ISLAND. Any region with non-ambient conditions is entered in a "geometry" (any of several geometric shapes can be specified). For each geometry containing AIR, the KEEL routine subdivides each cell into 27 equal subcells. If the center of a subcell is inside the

¹⁰ Graham, D.C., Gaby, L.P., and Rhoades, C.E., "SAIL, An Automated Approach to Software Development and Management", AFWL Interim Report 1971-6, U.S. Air Force Weapons Laboratory, Kirtland Air Force Base, NM, October 1976.

specified geometric region specified hydrodynamic variables are assigned to one twenty-seventh of the cell. For geometries designated as ISLAND, the entire cell is designated ISLAND (a totally reflective cell) if the center of the cell is in the geometry. At the end, any unfilled portions of cells are filled with ambient air. During the iJLL run, a hydrodynamic variable in a cell may be considered either the average value in the cell, the value in the cell, or the value at the center of the cell.

Positions called STATIONS, at which hydrodynamic data as a function of time are collected, are assigned in the KEEL run. Most of the variables and control parameters for HULL are also defined through KEEL.

The package of coding called LAMB (acronym for Low Altitude MultiBurst) is a collection of programs and subroutines which, among other things, can produce the hydrodynamic variables needed by HULL, for any position and time, from one or more bursts of nearly arbitrary yields and positions. There was optional coding in the HULL program to use part of the LAMB subroutines to supply hydrodynamic variables at some boundaries. We could not find coding in KEEL to initiate the grid directly from LAMB. We later modified KEEL to use LAMB subroutines, as in HULL, to supply initial values.

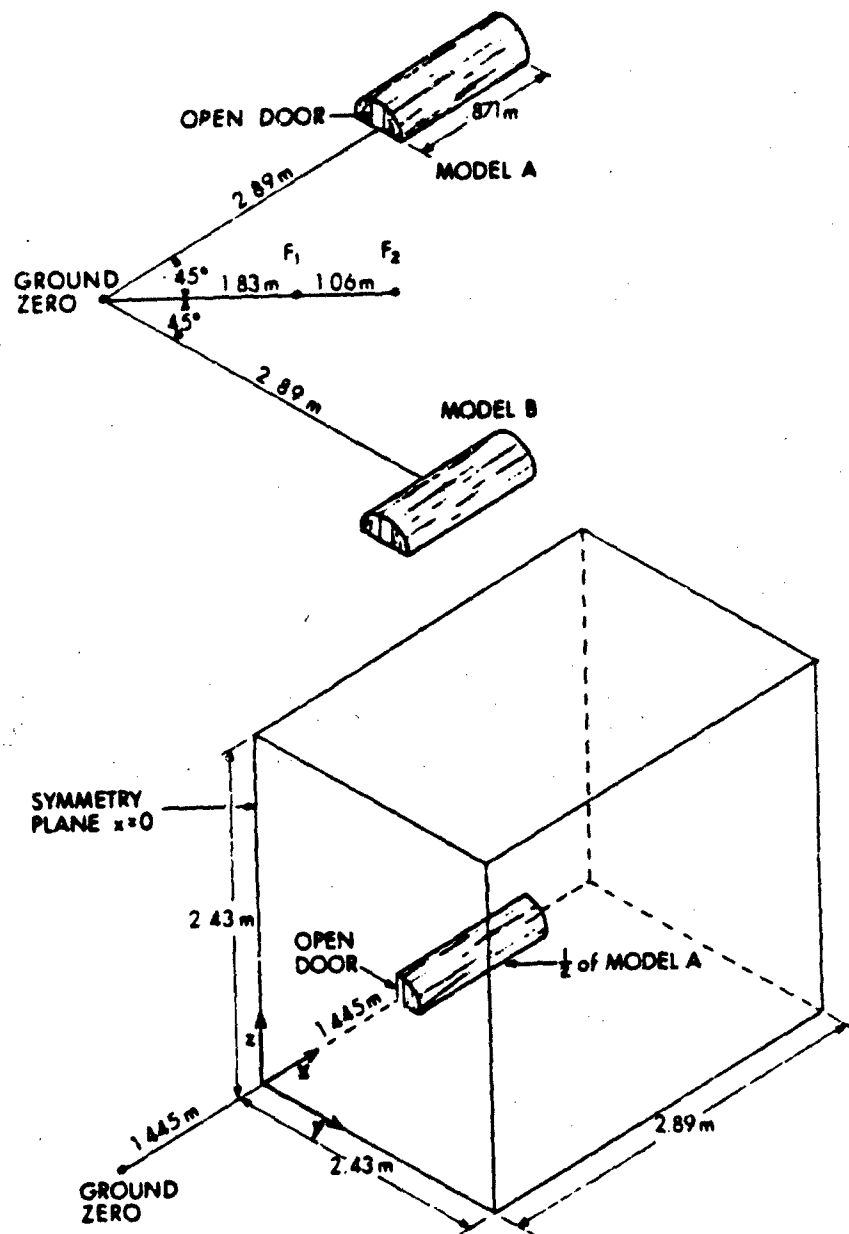


Figure 1. Sketch of the test set-up for which computation was performed.

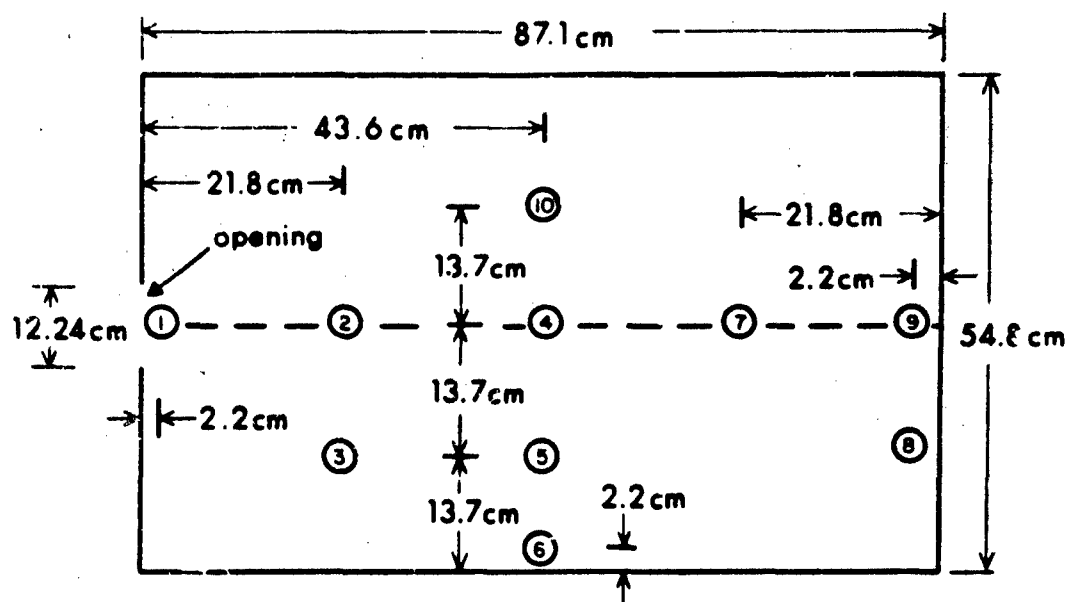


Figure 2. Schematic of pressure gauge locations for test.

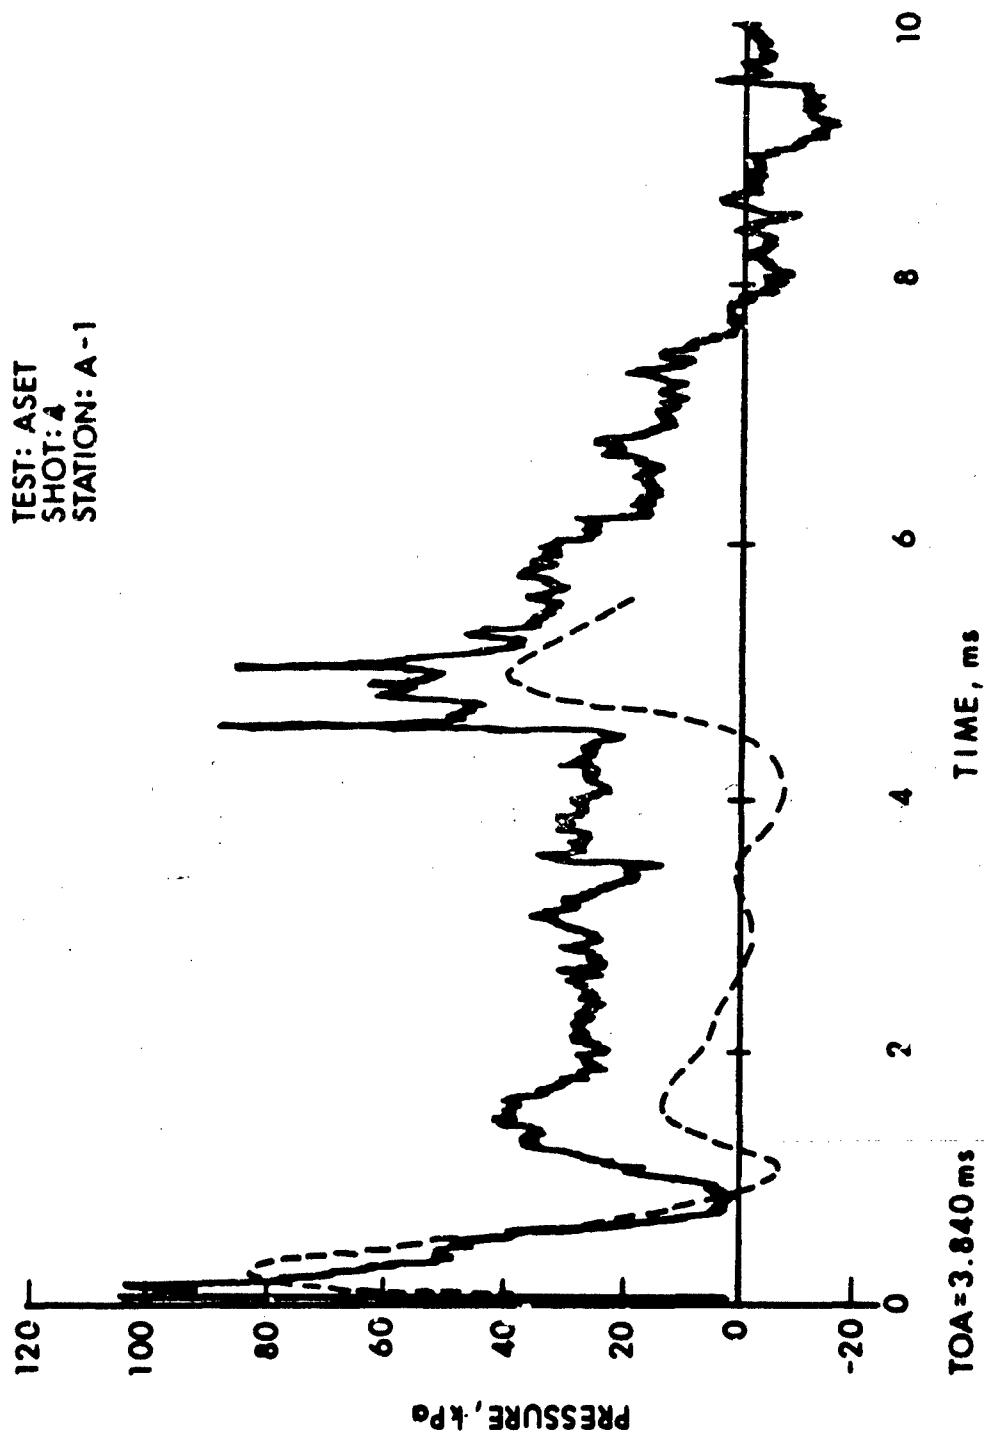


Figure 4a. Comparison of measured and HULL predicted overpressure at gauge position 1.

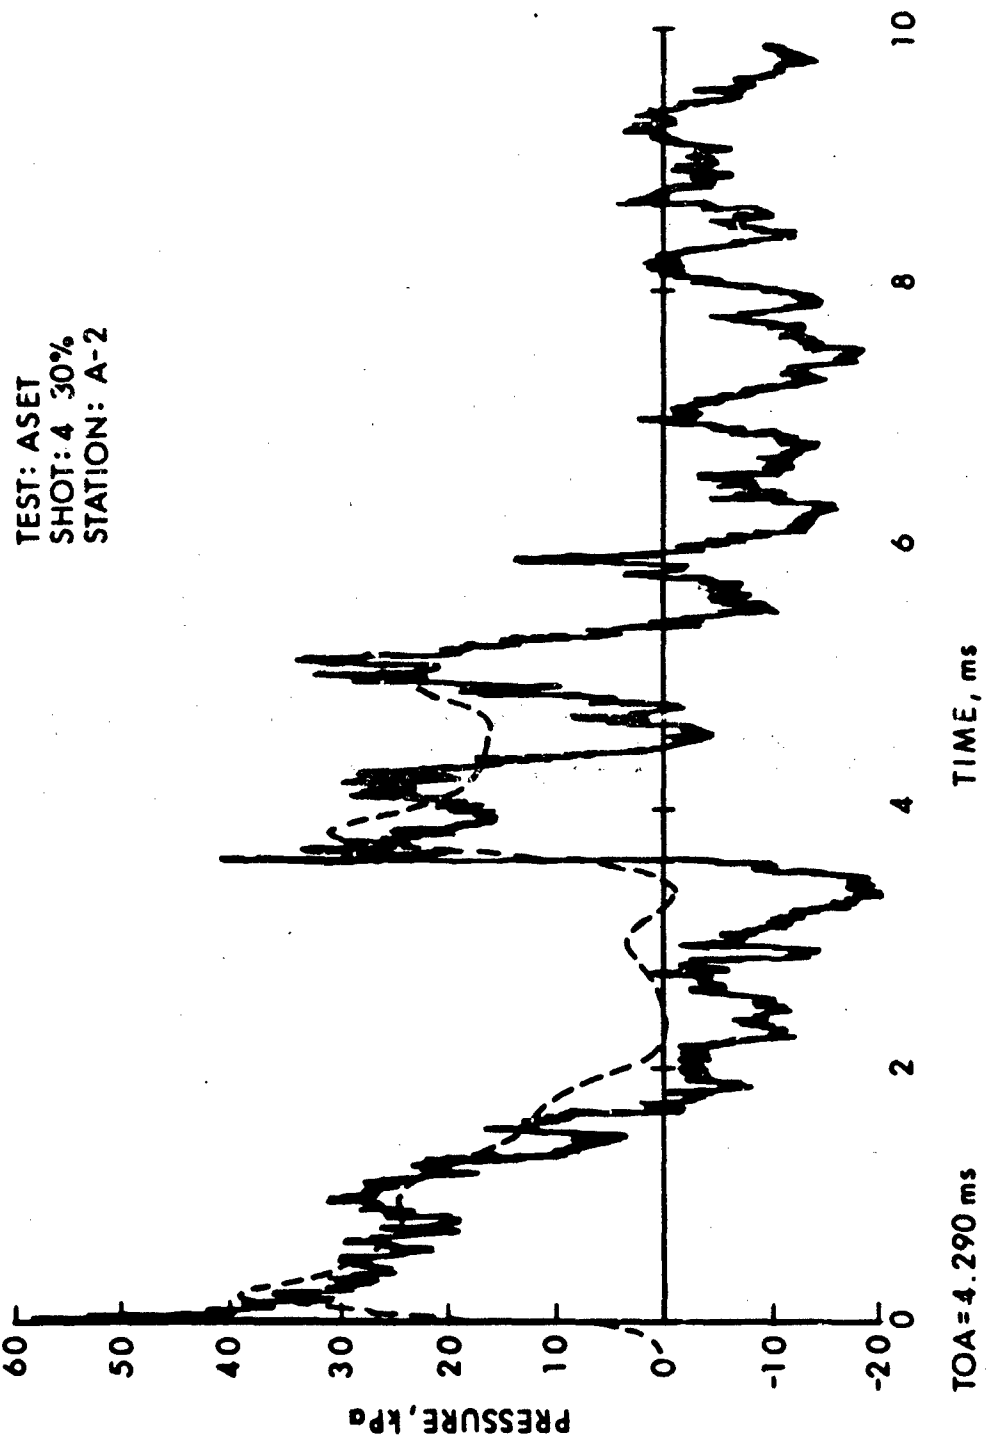


Figure 1b. Comparison of measured and HHI predicted overpressure at gauge position 2.

TEST: ASET
SHOT: 4
STATION: A-3

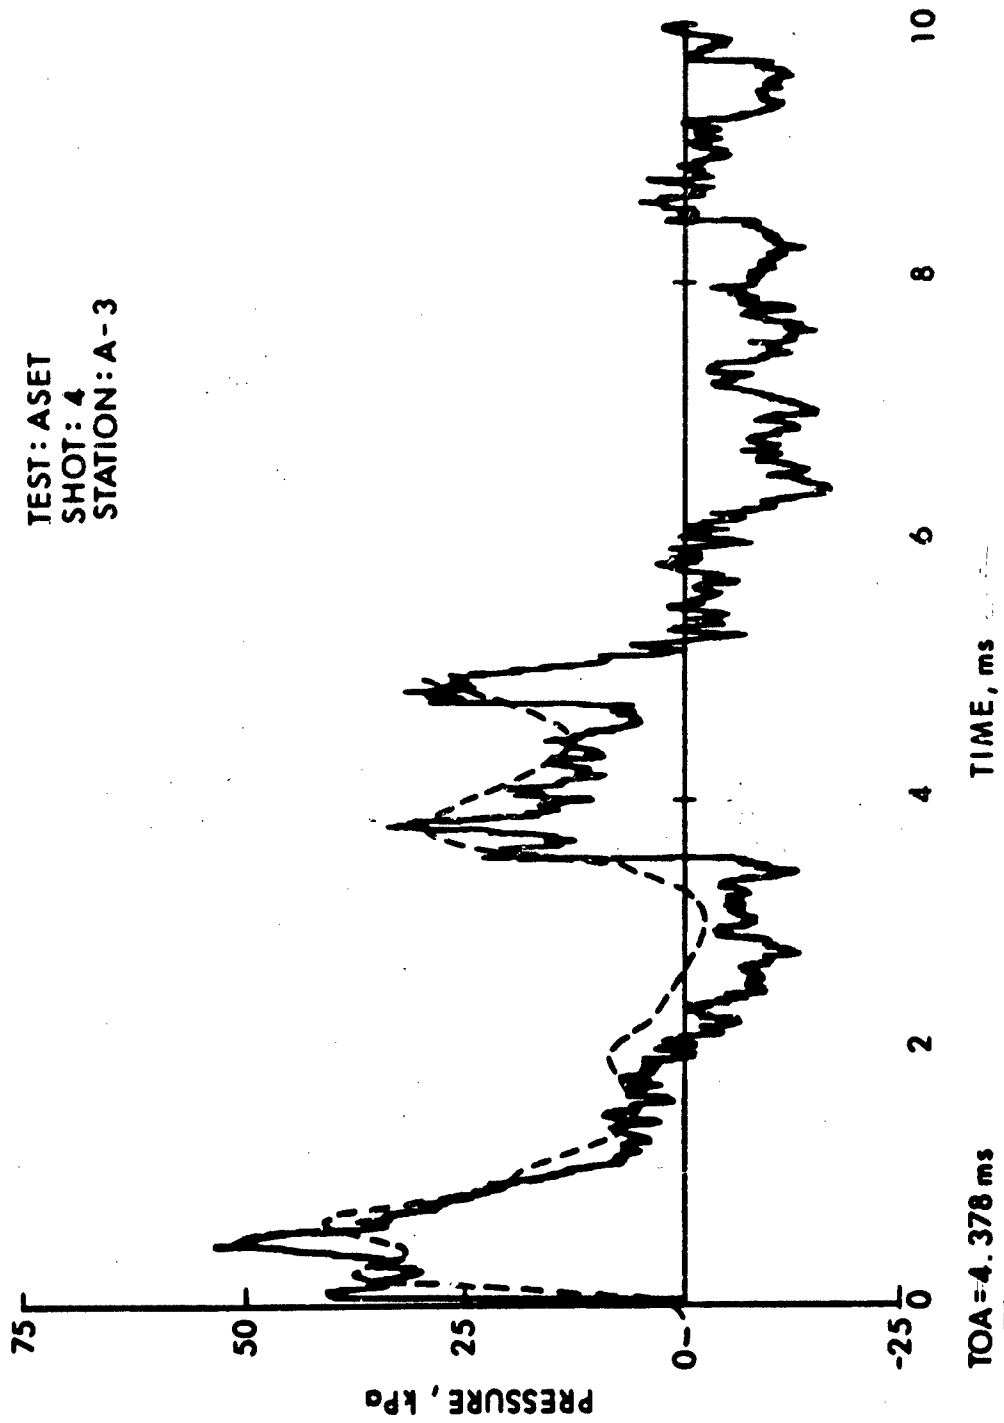


Figure 4c. Comparison of measured and HULL predicted overpressure at gauge position 3.

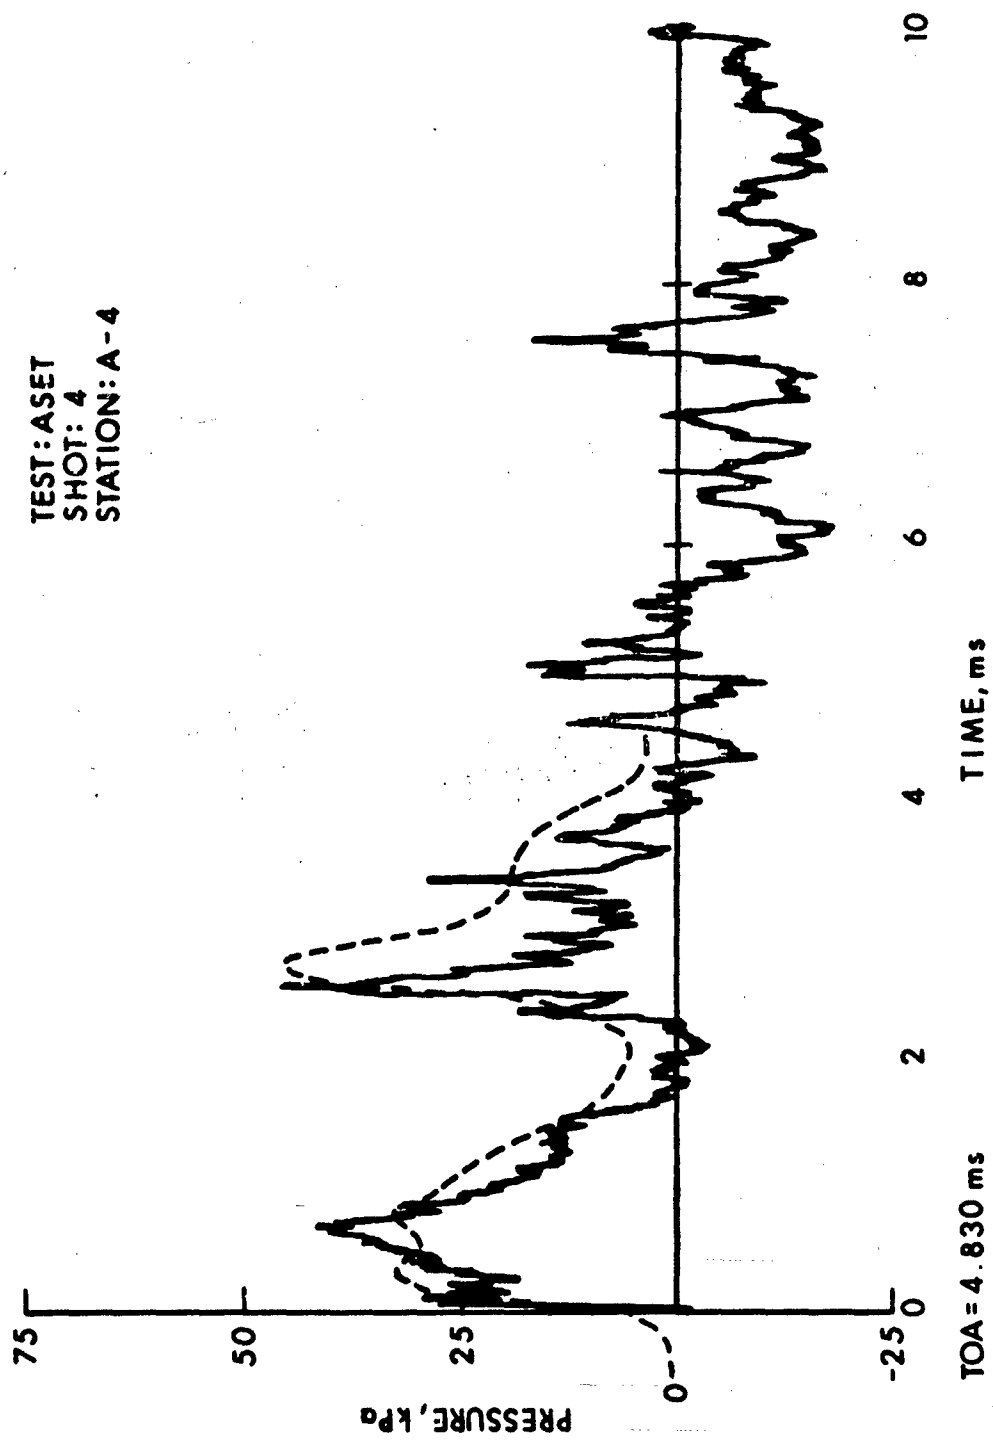


Figure 4d. Comparison of measured and HULL predicted overpressure at gauge position 1.

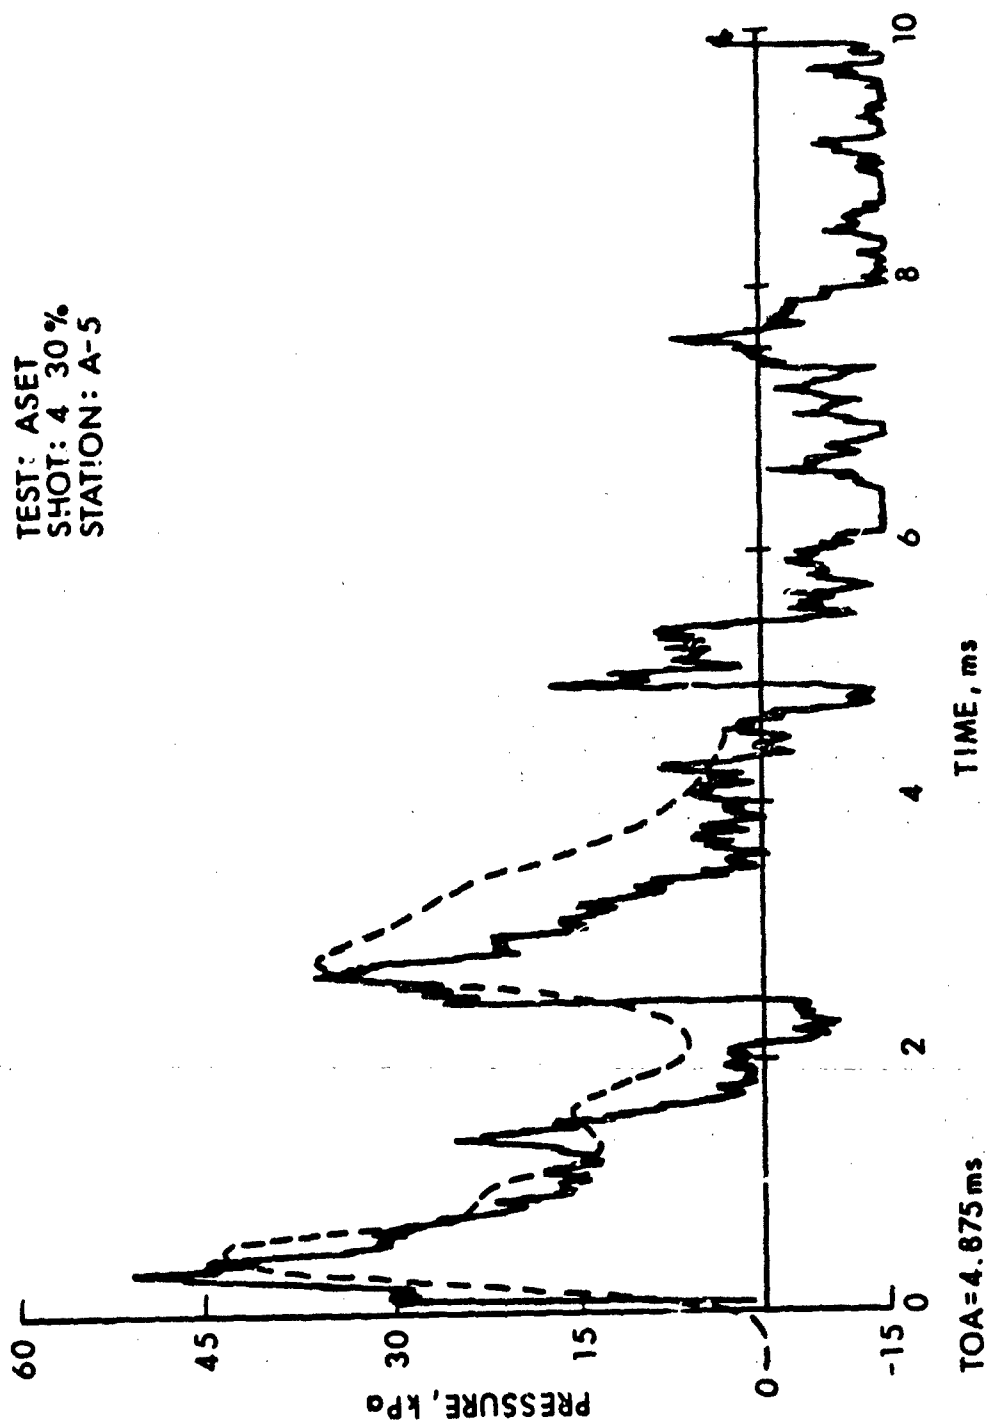


Figure 4c. Comparison of measured and MLL predicted overpressure at gauge position 5.

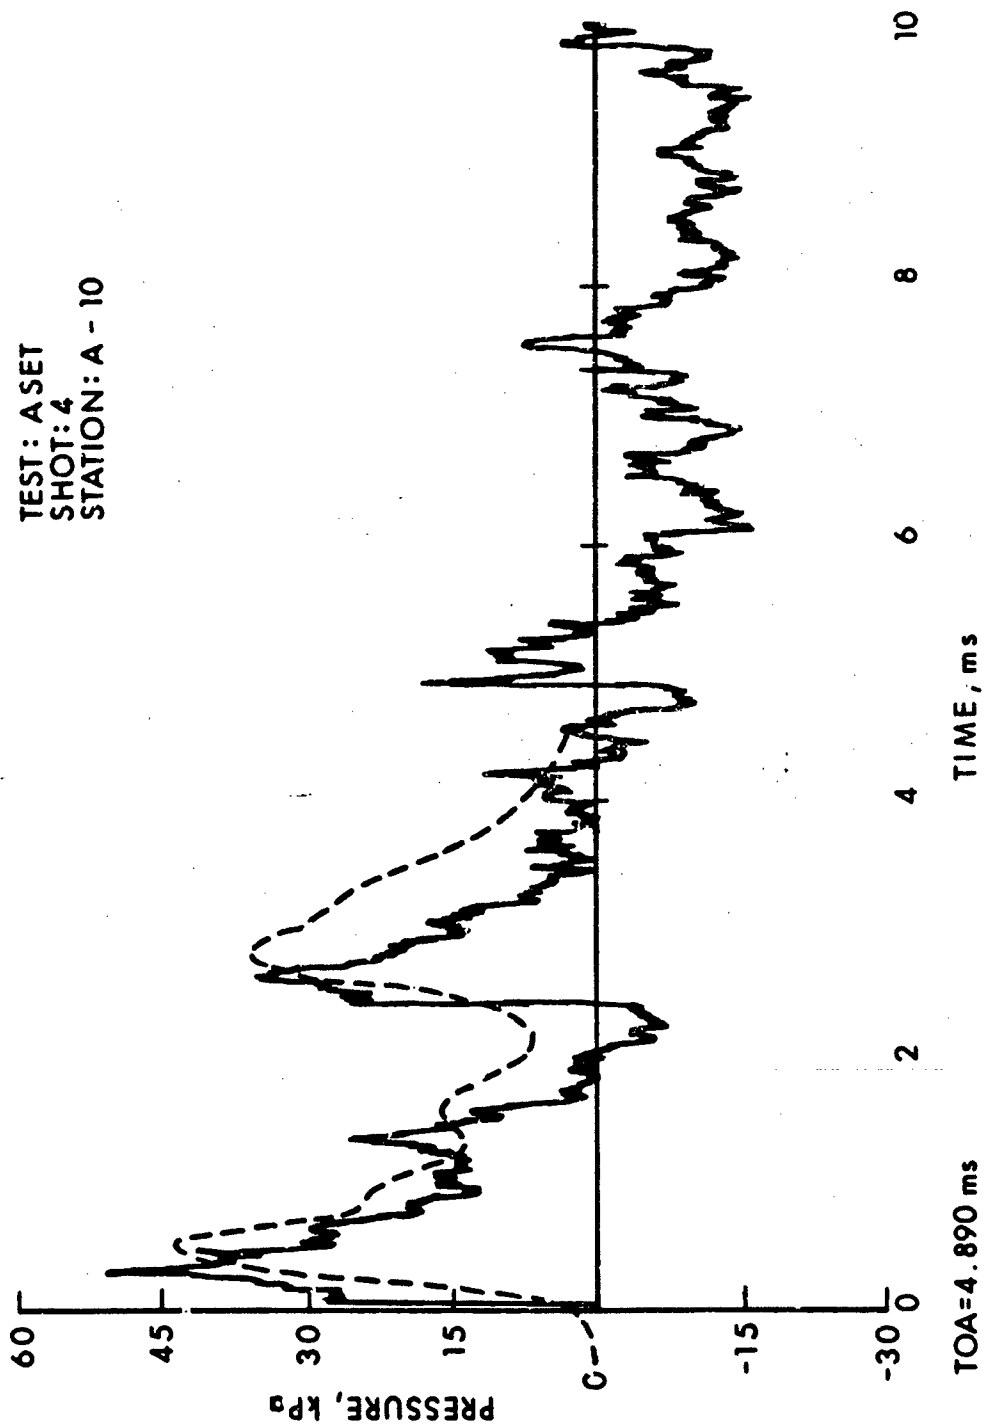


Figure 4f. Comparison of measured and ILLL predicted overpressure at gauge position 10.

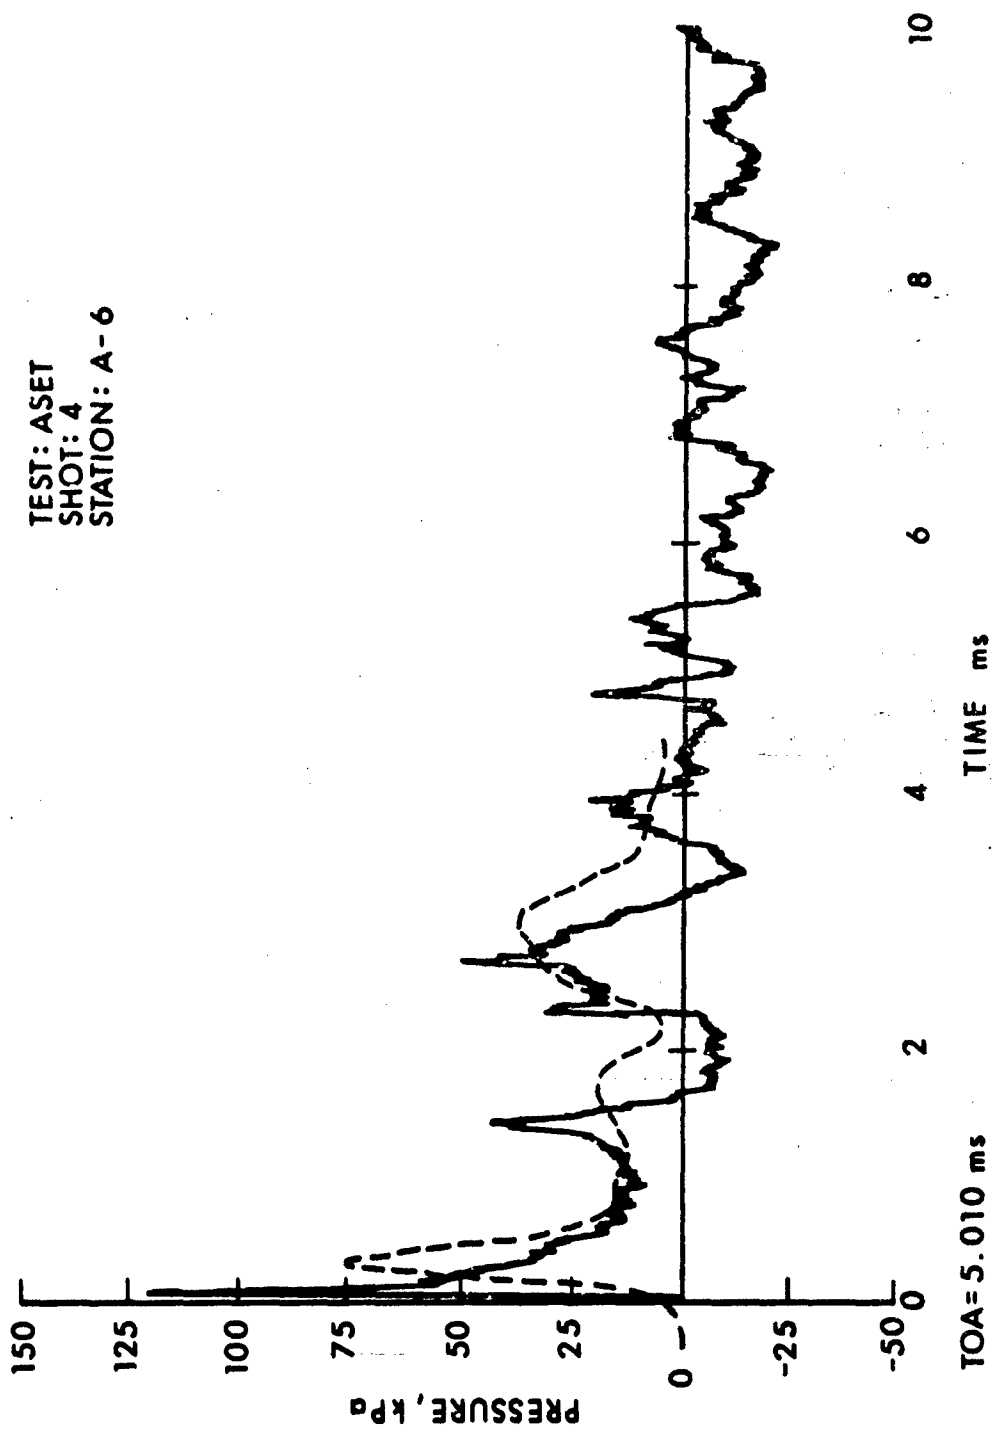


Figure 4g. Comparison of measured and ILLI.L predicted overpressure at gauge position 6.

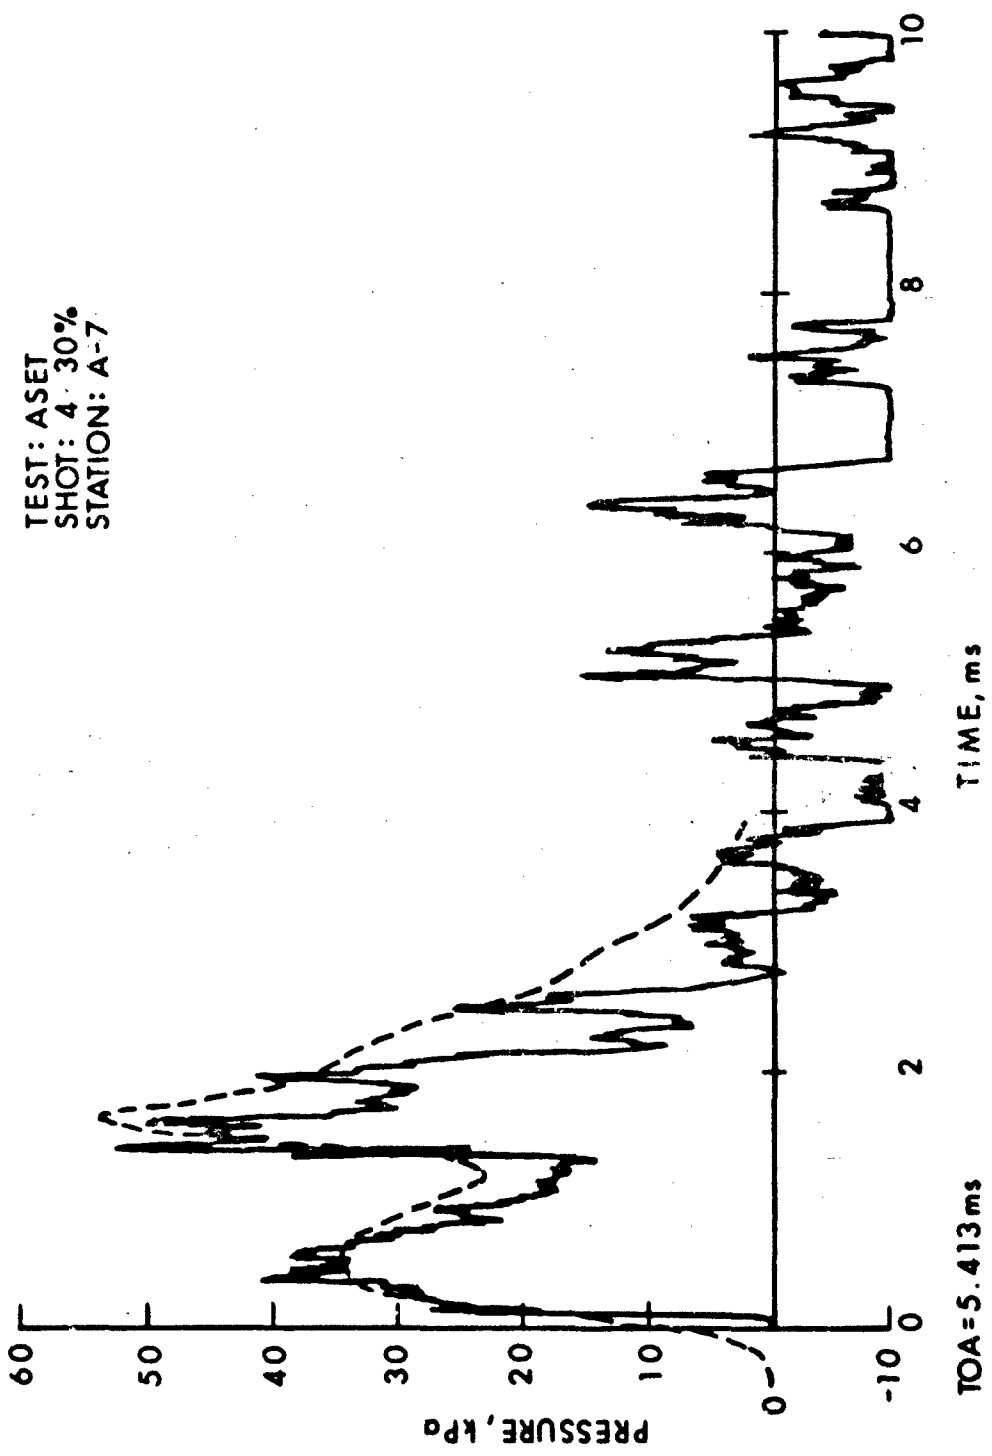


Figure 4b. Comparison of measured and fitted predicted overpressure at gauge position 7.

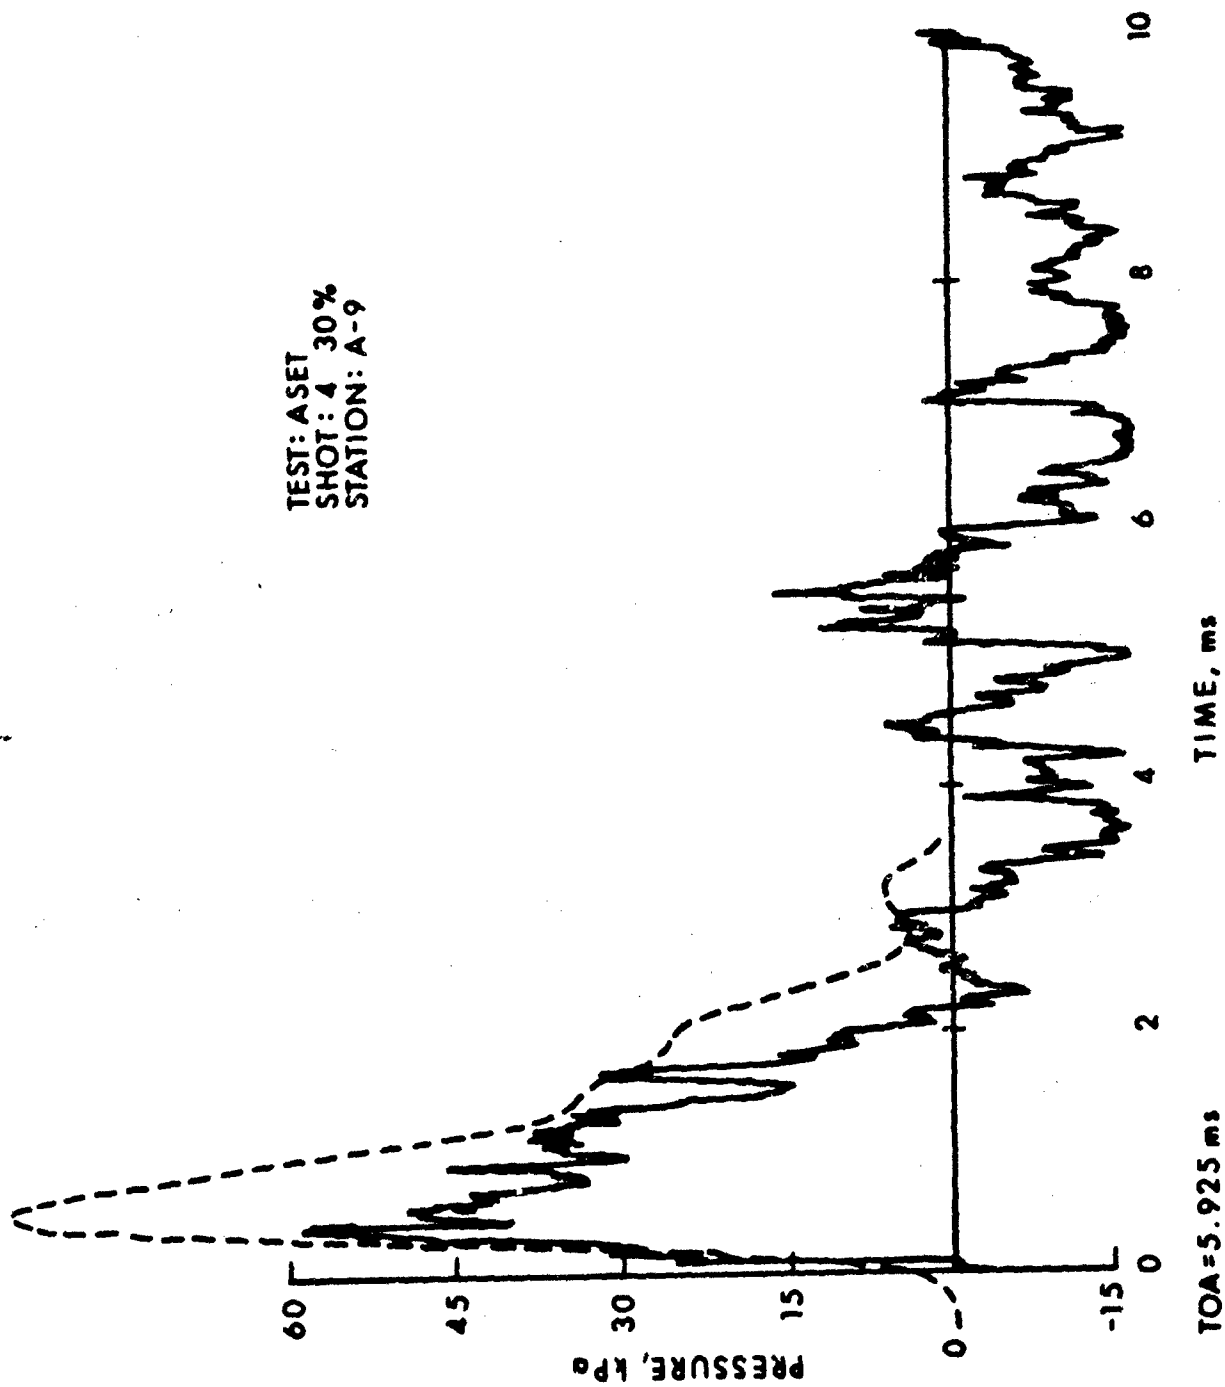


Figure 11. Comparison of measured and IIII predicted overpressure at gauge position 8.

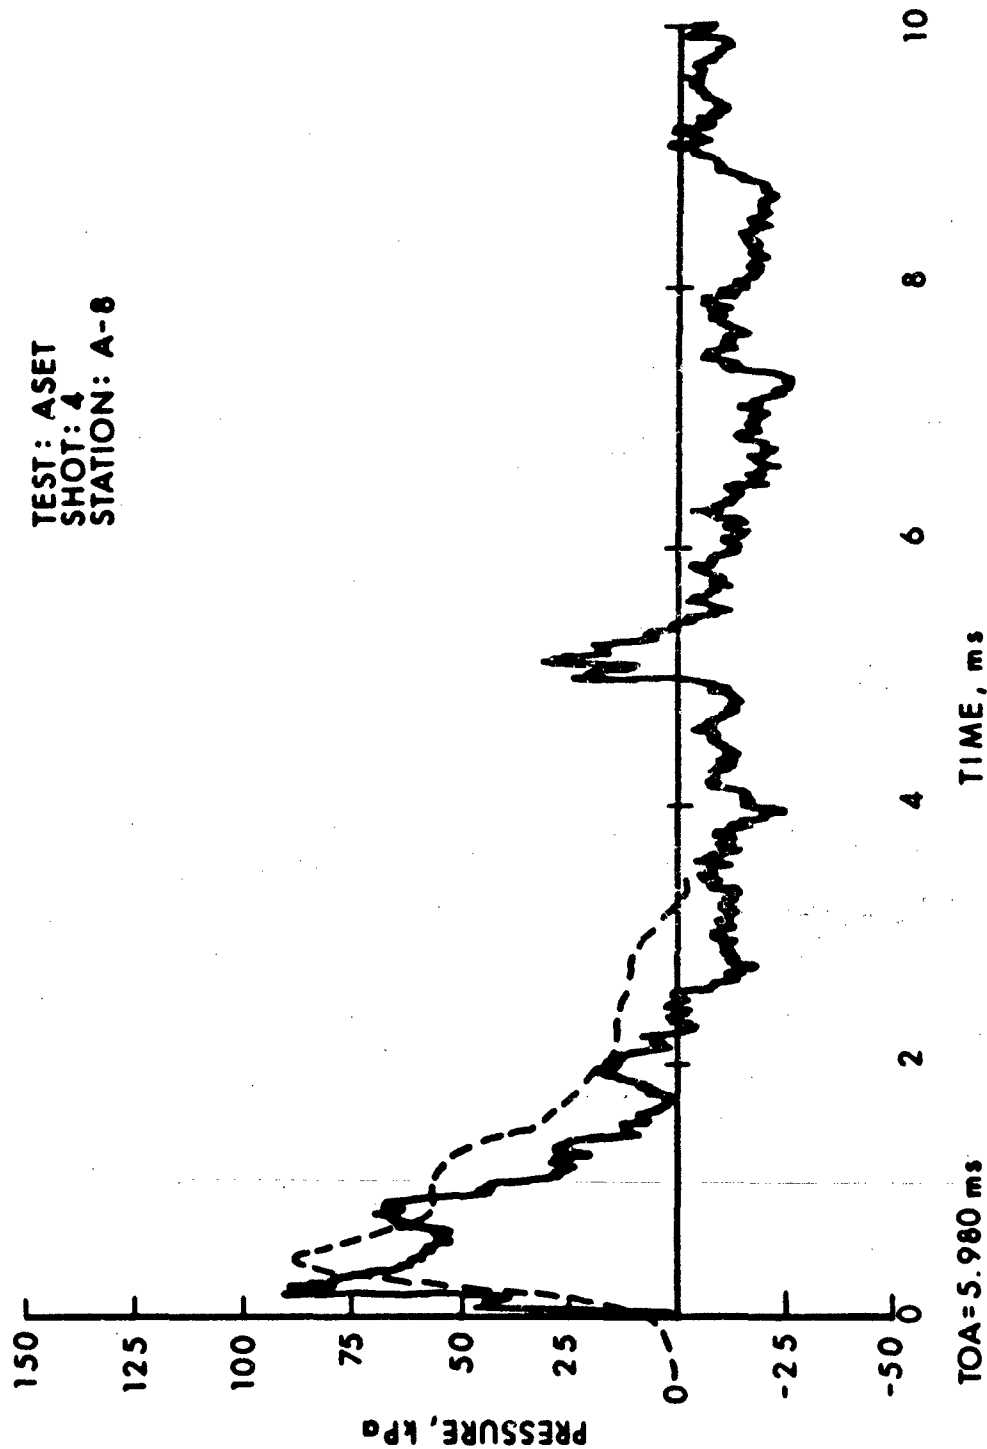


Figure 4j. Comparison of measured and MLL predicted overpressure at gauge position 9.

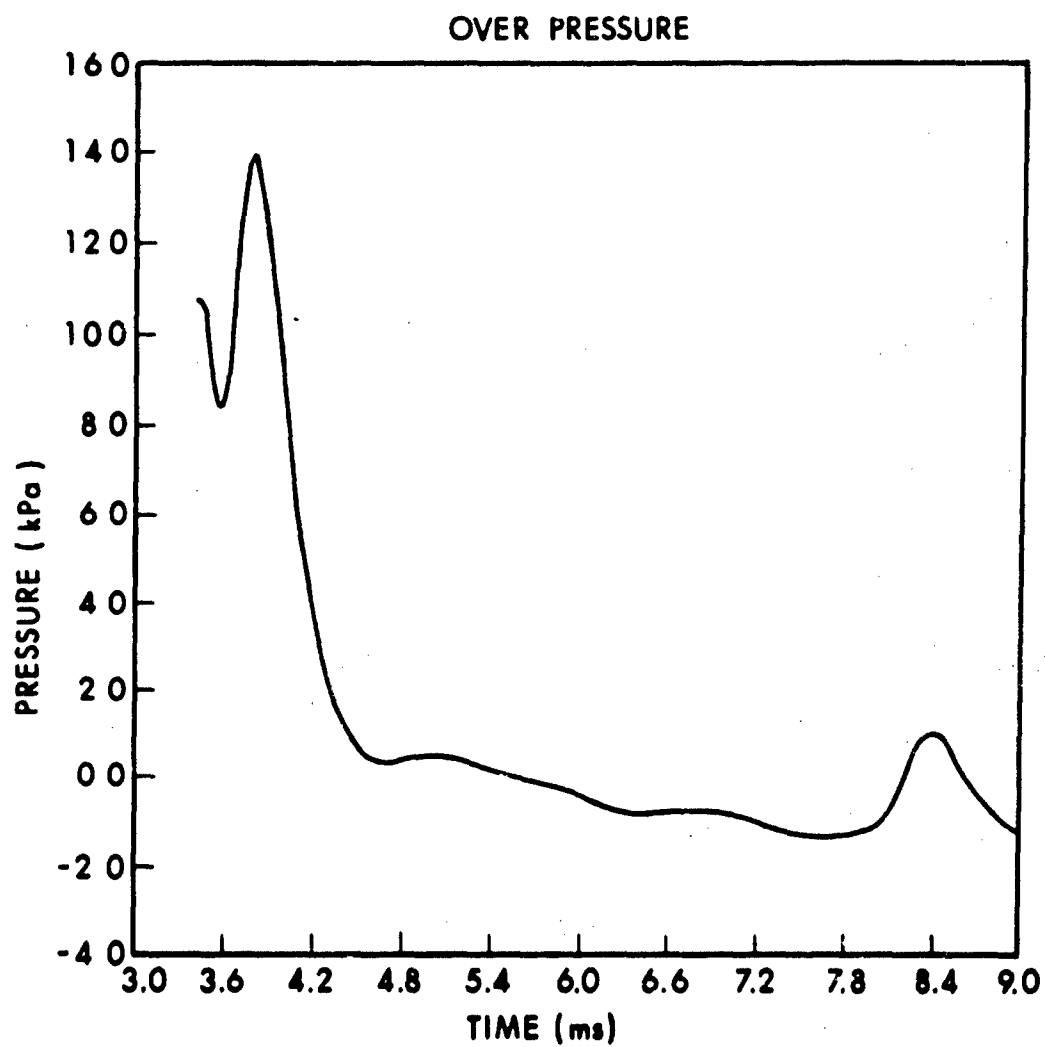


Figure 5a. Predicted HULL overpressure in a cell just in front of the open door of the model.

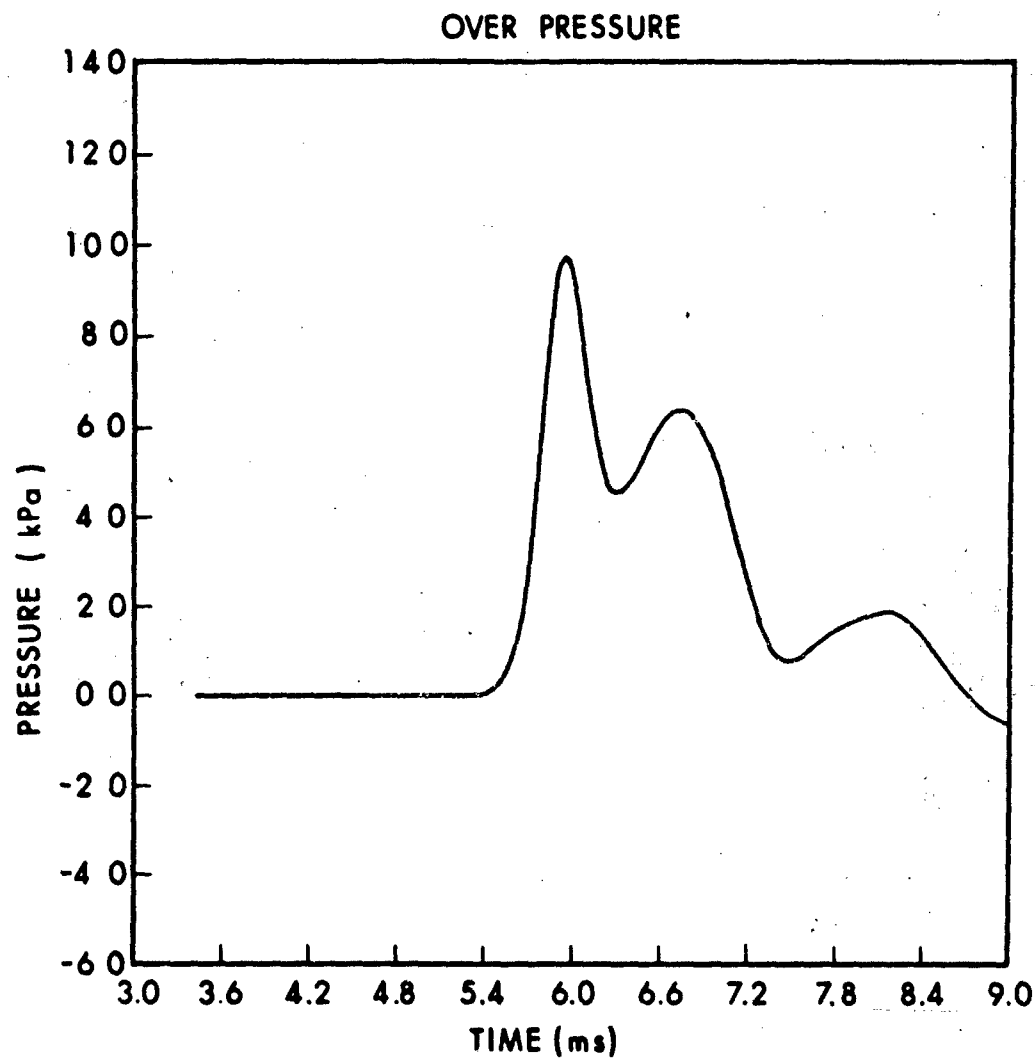


Figure 5b. Predicted HULL overpressure in the back corner of the model.

TEST: ASET
 SHOT: 4
 STATION: F-2

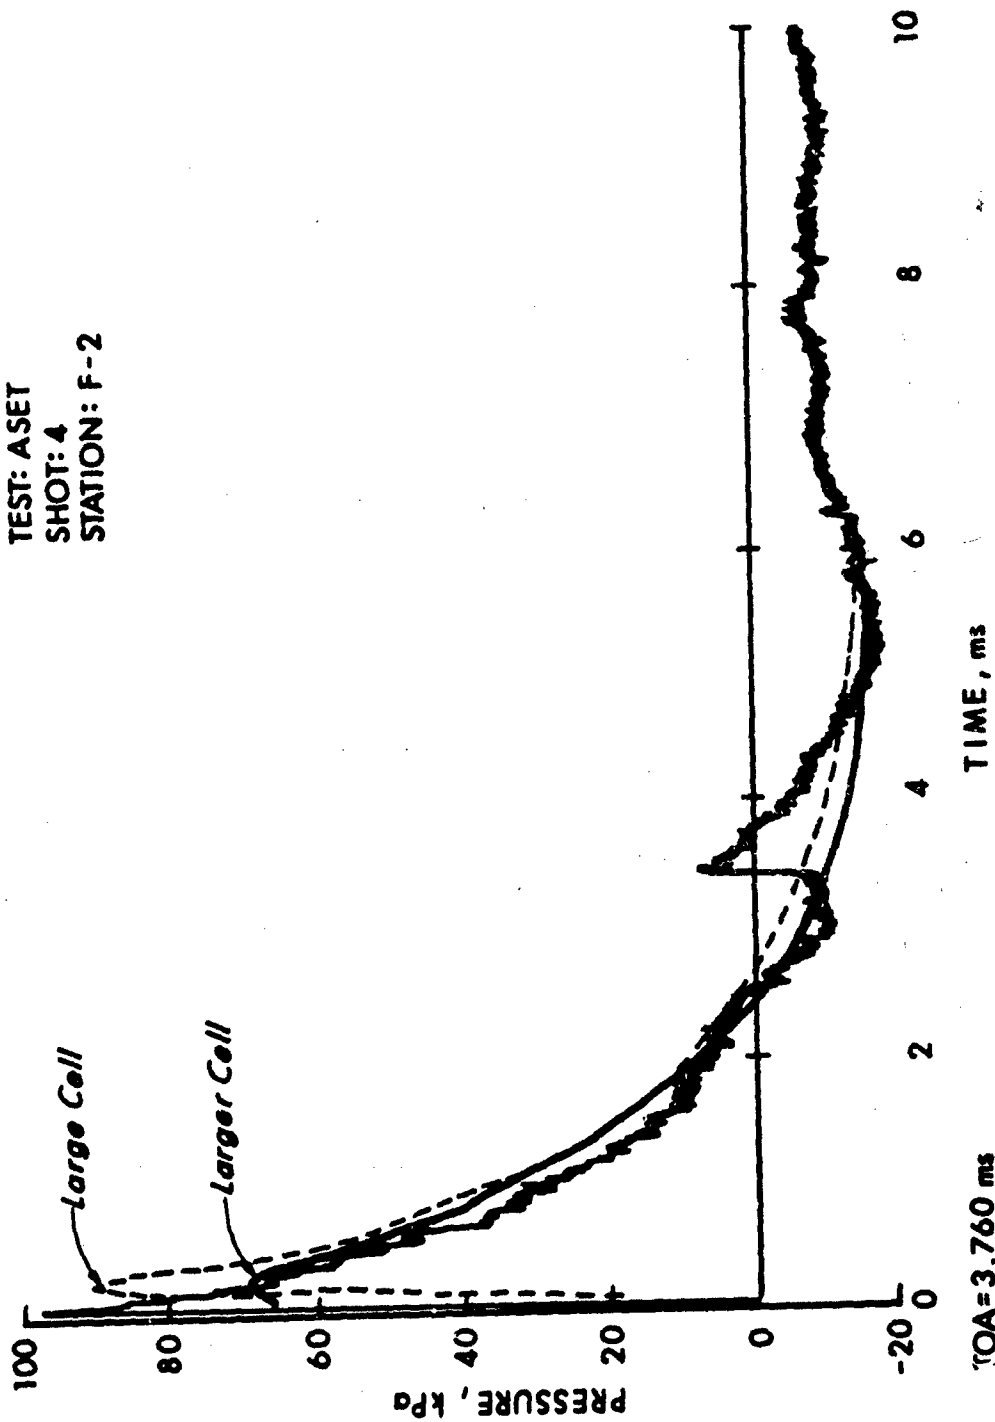


Figure 6. Comparison of measured free field overpressure 289 cm from ground zero and HULL predicted overpressure in two cells containing points at that distance but of different size and shape.

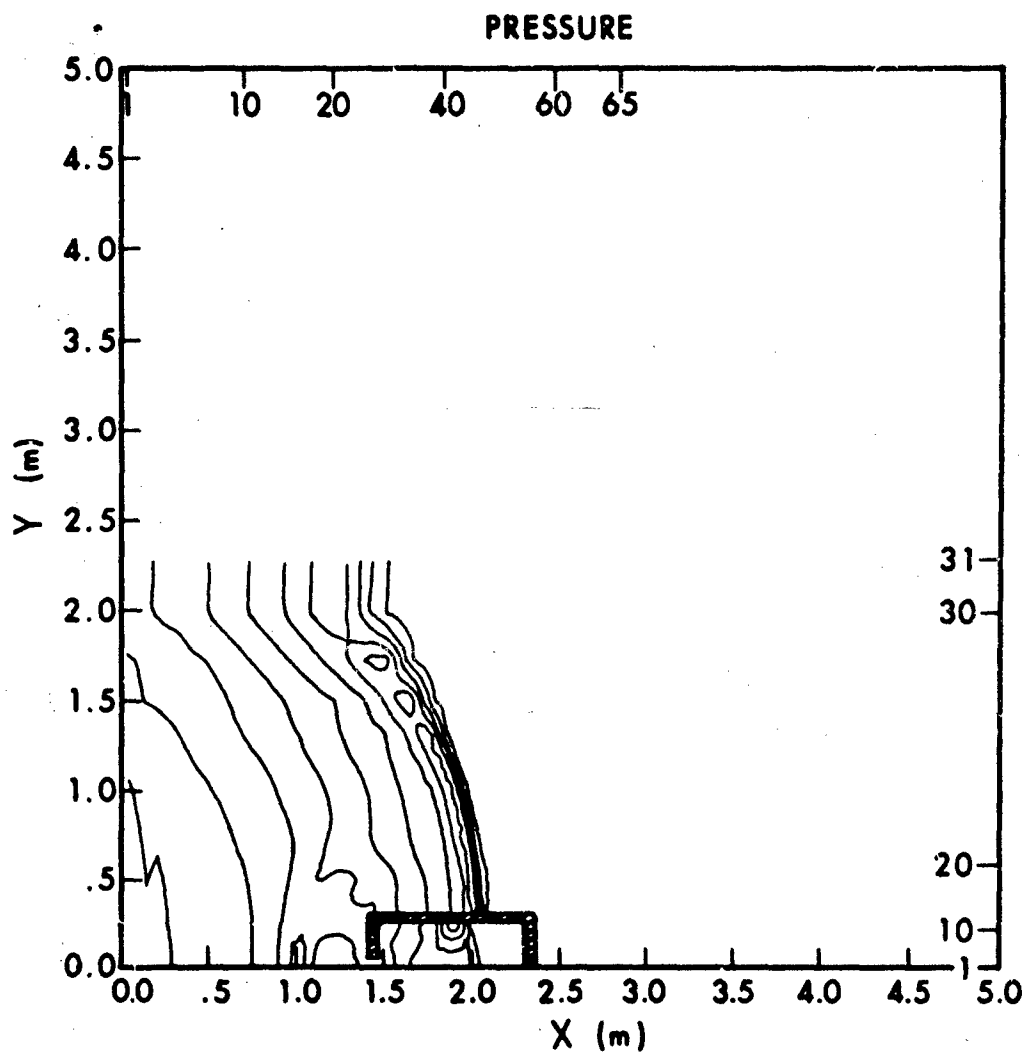


Figure 7. HULL generated isobars in the bottom computational plane at 5 ms.

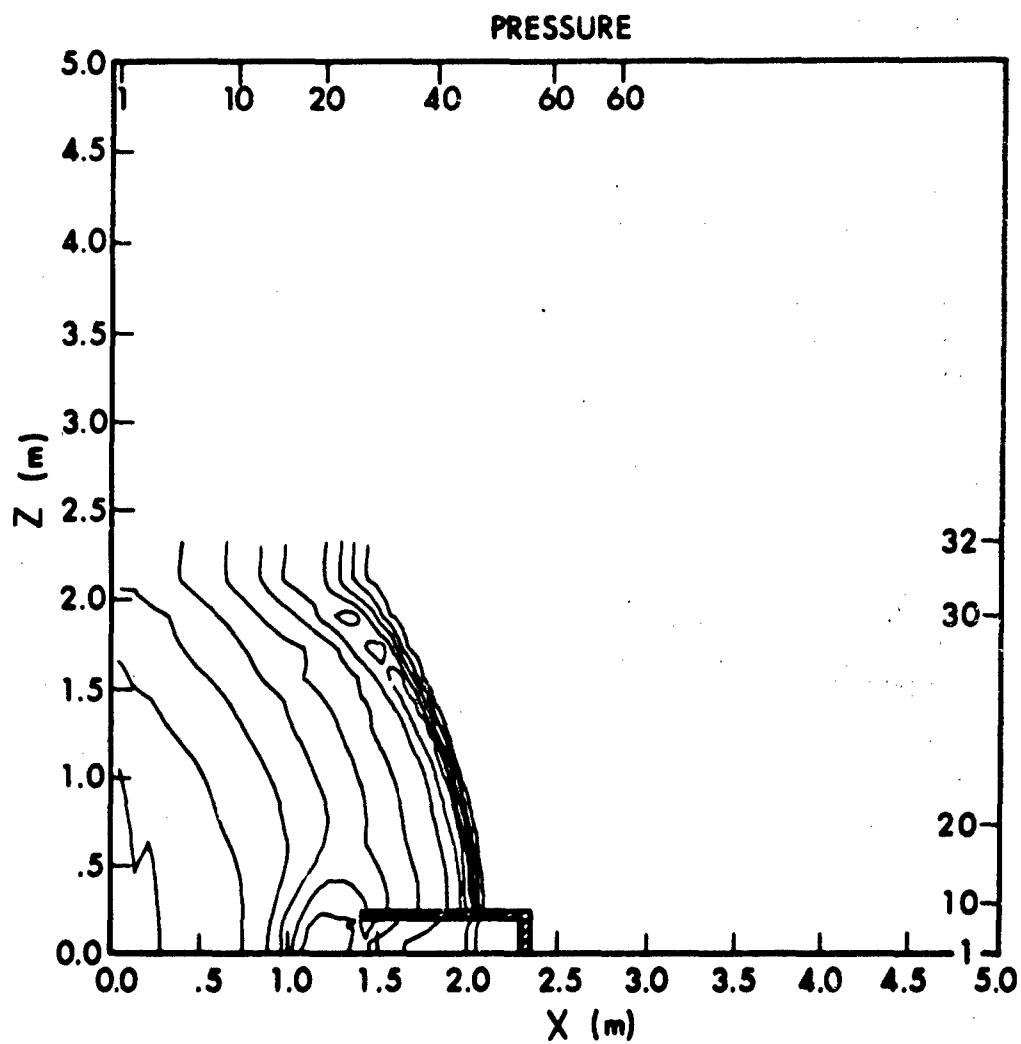


Figure 8. HULL generated isobars in the vertical plane adjacent to the $y=0$ symmetry boundary.

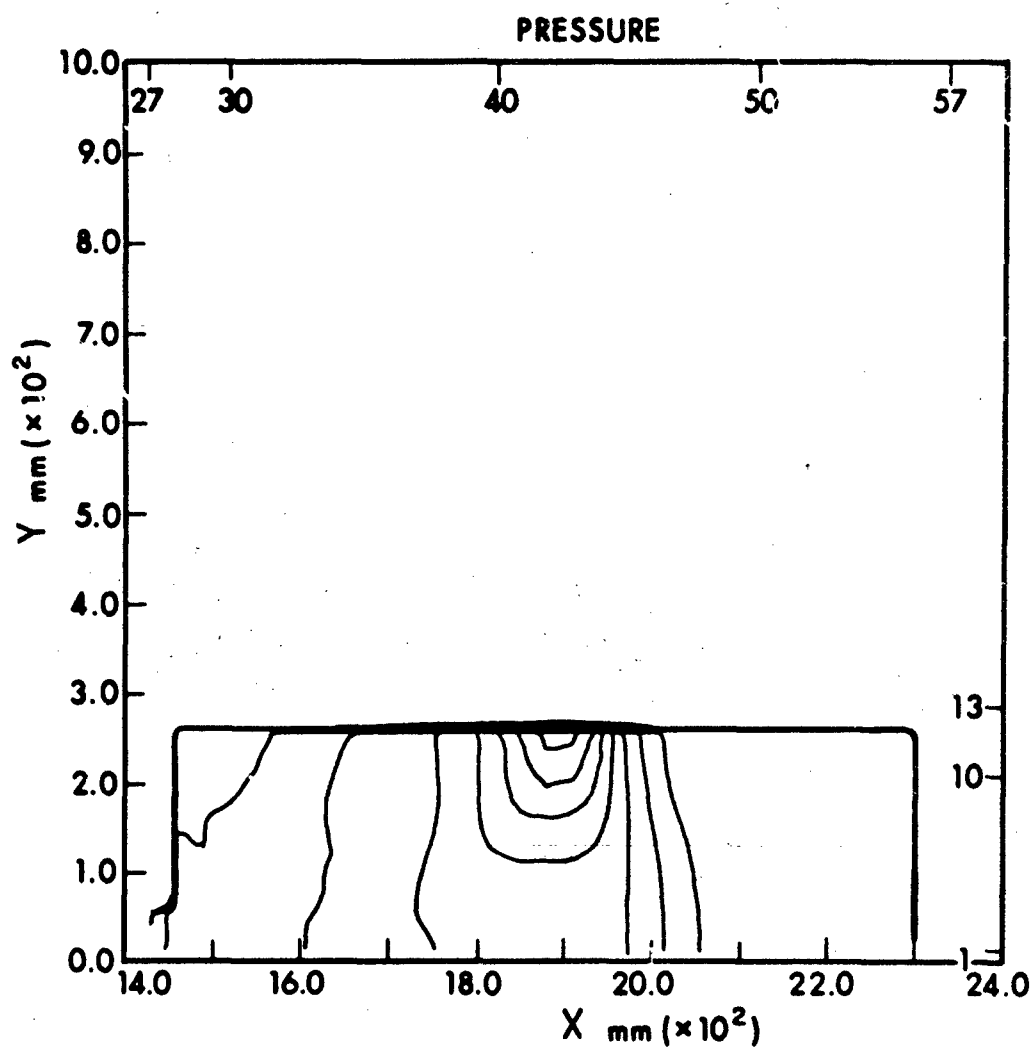


Figure 9a. HULL generated isobars near the floor of the model at 5 ms.

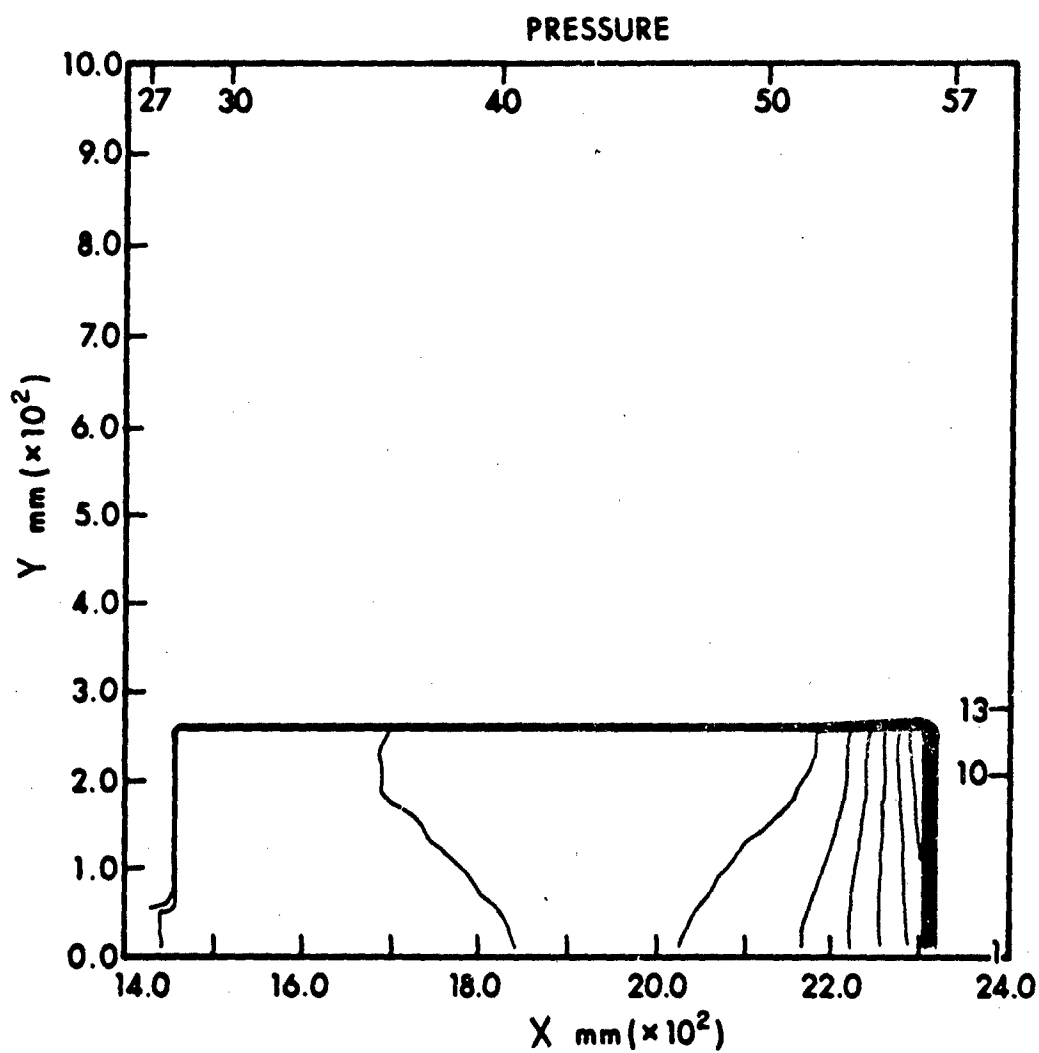


Figure 9b. HULL generated isobars near the floor of the model at 6 ms.

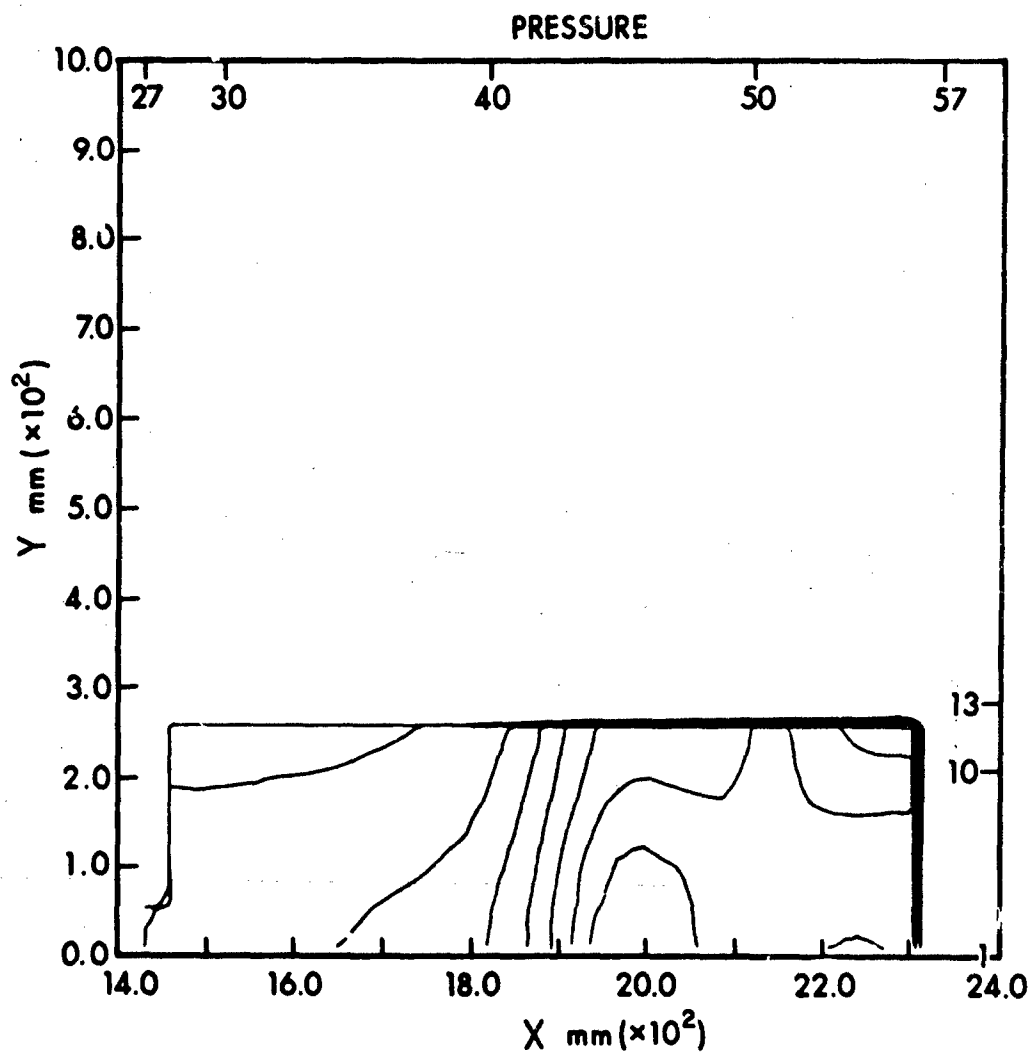


Figure 9c. HULL generated isobars near the floor of the model at 7 ms.

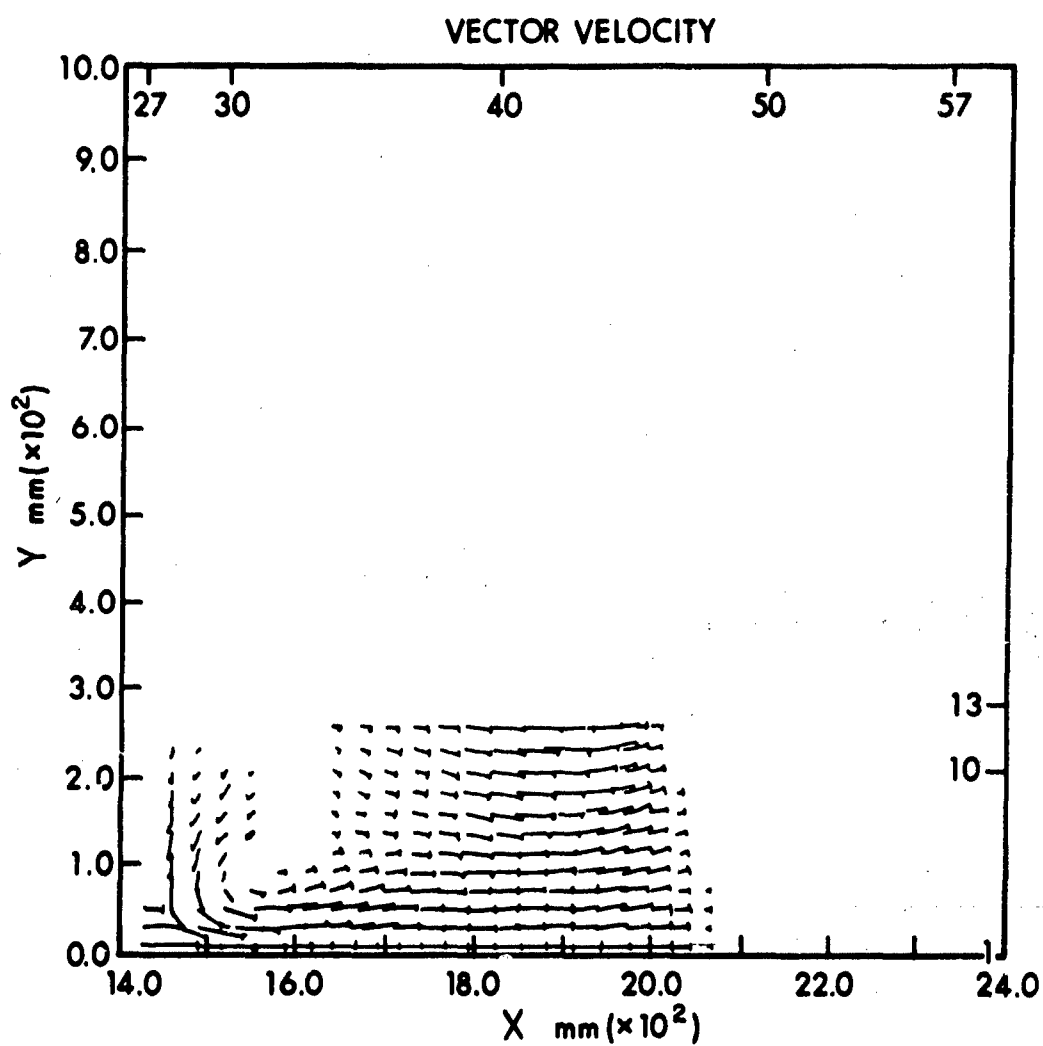


Figure 10a. HULL generated velocity vector plots near the floor of the model at 5 ms.

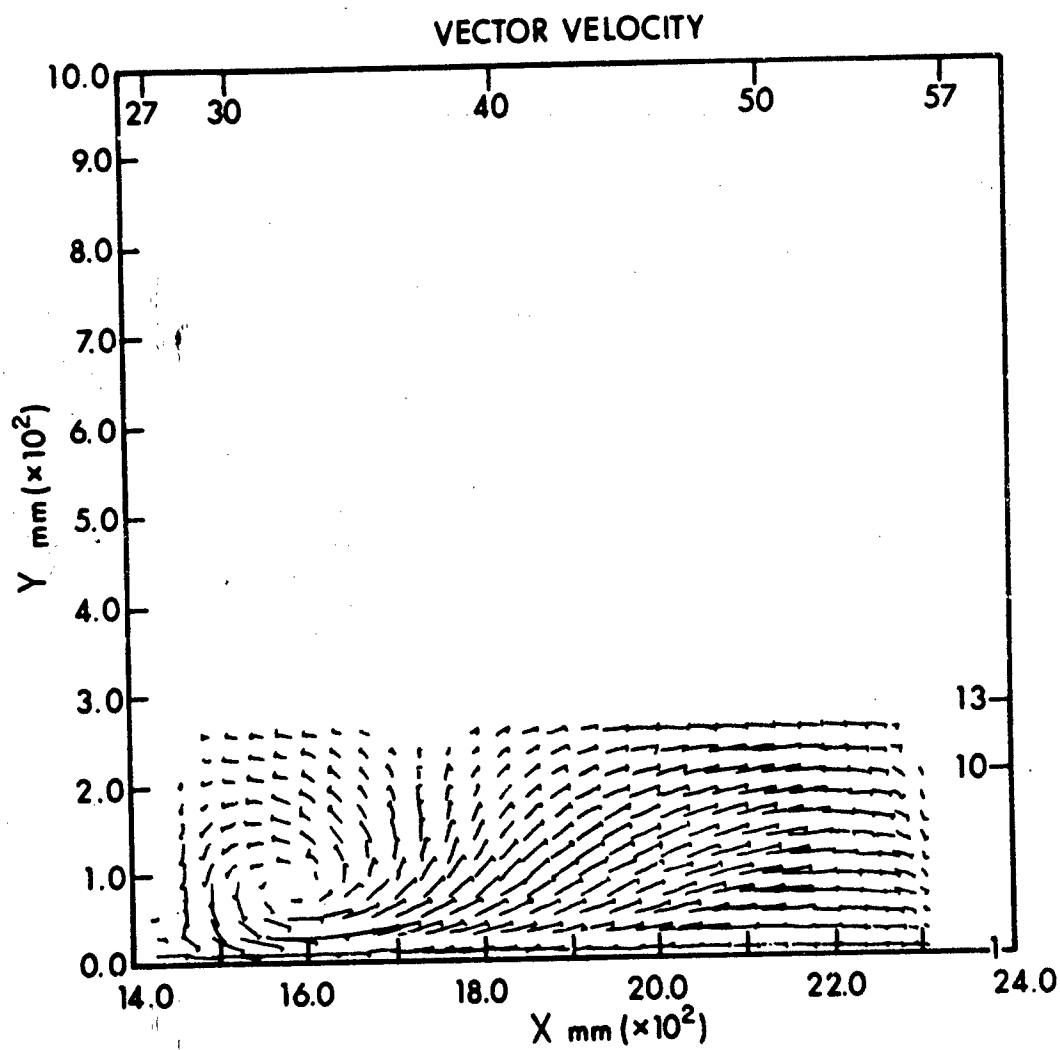


Figure 10b. HULL generated velocity vector plots near the floor of the model at 6 ms.

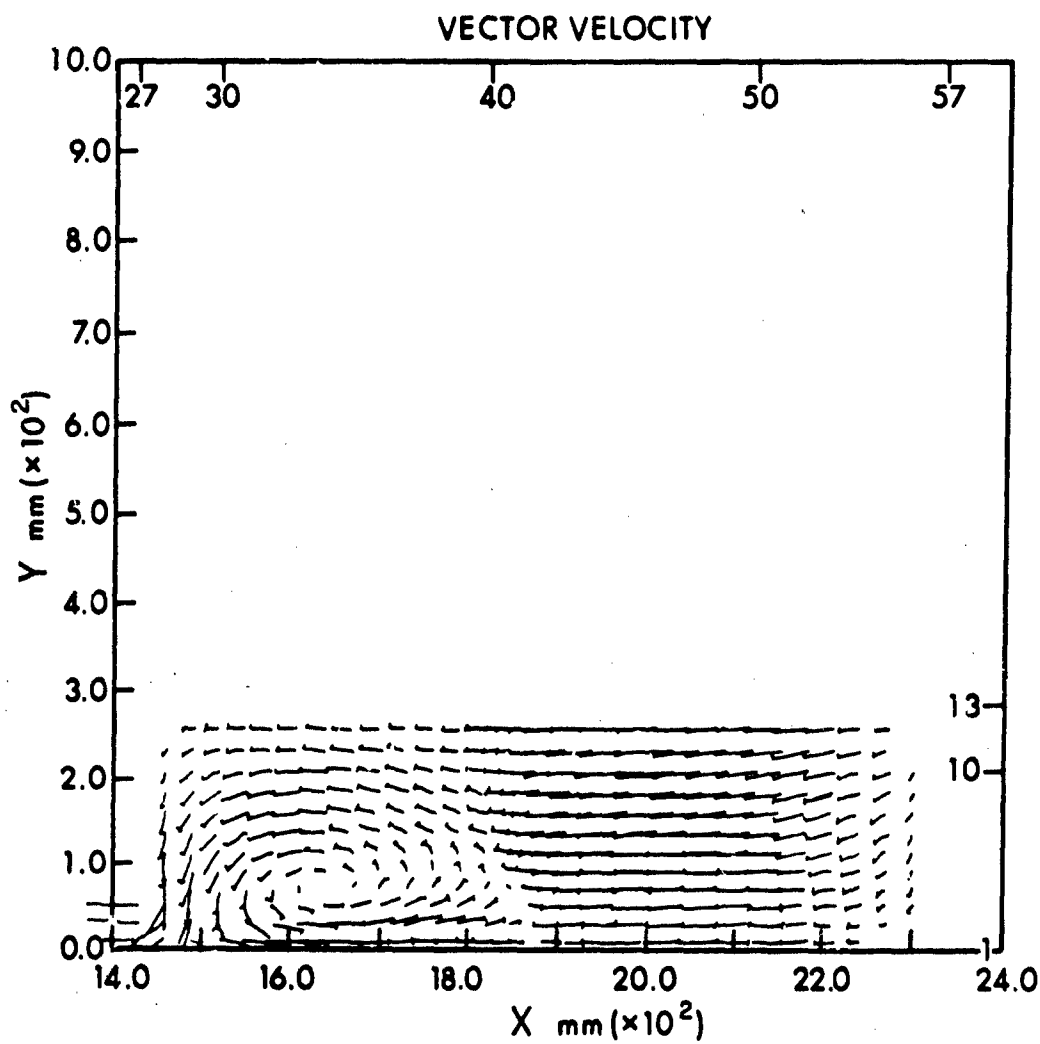


Figure 10c. HULL generated velocity vector plots near the floor of the model at 7 ms.

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
2	Commander Defense Technical Info Center ATTN: DDC-DDA Cameron Station Alexandria, VA 22314	1	Director Weapons Systems Evaluation Gp ATTN: Document Control Washington, DC 20305
4	Director of Defense Research and Engineering ATTN: DD/TWP DD/S&SS DD/I&SS AD/SW Washington, DC 20301	1	Director National Security Agency ATTN: E. F. Butala, R15 Ft. George G. Meade, MD 20755
2	Asst. to the Secretary of Defense (Atomic Energy) ATTN: Document Control Donald R. Cotter Washington, DC 20301	3	Director Joint Strategic Target Planning Staff JCS ATTN: Sci & Tech Info Lib JLTW-2 DOXT Offut AFB Omaha, NB 68113
3	Director Defense Advanced Research Projects Agency ATTN: Tech Lib NMRO PMO 1400 Wilson Boulevard Arlington, VA 22209	1	Director Defense Communications Agency ATTN: Code 930 Washington, DC 20305
2	Director Federal Emergency Management Agency ATTN: Mr. George Sisson/RF-SR Technical Library Washington, DC 20301	5	Director Defense Nuclear Agency ATTN: STSI/Archives SPAS STSP STVL/Dr. La Vier RATN Washington, DC 20305
4	Director Defense Intelligence Agency ATTN: DT-1B DB-4C/E. O. Farrell DT-2/Wpns & Sys Div RDS-344 Washington, DC 20301	7	Director Defense Nuclear Agency ATTN: DDST/Dr. Conrad DDST/Dr. Oswald STTL/Tech Lib (2 cys) SPSS/K. Goering G. Ullrich SPTD/T. Kennedy Washington, DC 20305

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
2	Commander Field Command, DNA ATTN: FCPR FCTMOF Kirtland AFB, NM 87115	2	Office, Chief of Engineers Department of the Army ATTN: DAEN-MCE-D DAEN-RDM 890 South Pickett Street Alexandria, VA 22304
1	Chairman DoD Explosives Safety Board ATTN: T. Zaker Rm 856-C, Hoffman Bldg. I 2461 Eisenhower Avenue Alexandria, VA 22331	5	Commander US Army Engineer Waterways Experiment Station ATTN: Technical Library William Flathau John N. Strange Guy Jackson Leo Ingram P.O. Box 631 Vicksburg, MS 39180
1	Director Institute for Defense Analyses ATTN: IDA Librarian, Ruth S. Smith 400 Army-Navy Drive Arlington, VA 22202	1	Commander US Army Engineering Center ATTN: ATSEN-SY-L Fort Belvoir, VA 22060
1	Program Manager US Army BMD Program Office ATTN: John Shea 5001 Eisenhower Avenue Alexandria, VA 22333	1	Division Engineer US Army Engineering Division ATTN: HNDSE-R/M.M. Deabo Huntsville Box 1600 Huntsville, AL 35804
2	Director US Army BMD Advanced Technology Center ATTN: CRDABH-X CRDABH-S Huntsville, AL 35807	1	Division Engineer US Army Engineering Division Ohio River ATTN: Docu Can P.O. Box 1159 Cincinnati, OH 45201
1	Commander US Army BMD Command ATTN: BDMSC-TFN/N.J. Hurst P.O. Box 1500 Huntsville, AL 35807	2	HDQA (DAMA-AR; NCL Div) Washington, DC 20310
2	Deputy Chief of Staff for Operations and Plans ATTN: Technical Library Director of Chemical & Nuclear Operations Department of the Army Washington, DC 20310	1	Commander US Army Materiel Development and Readiness Command ATTN: DRCDMD-ST 5001 Eisenhower Avenue Alexandria, VA 22333

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
3	Commander US Army Armament Research and Development Command ATTN: DRDAR-LCN-F, W.Reiner DRDAR-TSS (2 cys) Dover, NJ 07801	6	Commander US Army Electronics Research and Development Command ATTN: DELSD-L DELEW-E W. S. McAfee R. Freiberg DELS-D-EI, J. Roma DELS-D-EM A. Sigismondi C. Goldy Fort Monmouth, NJ 07703
1	Commander US Army Armament Materiel Readiness Command ATTN: DRSAR-LEP-L, Tech Lib Rock Island, IL 61099	6	Commander US Army Harry Diamond Labs ATTN: Mr. James Gaul Mr. L. Belliveau Mr. J. Meszaros Mr. J. Gwaltney Mr. F. N. Wimenitz Mr. Bill Vault 2800 Powder Mill Road Adelphi, MD 20783
1	Director US Army ARRADCOM Benet Weapons Laboratory ATTN: DRDAR-LCB-TL Watervliet, NY 12189	5	Commander US Army Harry Diamond Labs ATTN: DELHD-TA-L DRXDO-TI/002 DRXDO-NP DRXDO-RBH/P. Caldwell DELHD-RBA/J. Rosado 2800 Powder Mill Road Adelphi, MD 20783
1	Commander US Army Aviation Research and Development Command ATTN: DRDAV-E 4300 Goodfellow Blvd. St. Louis, MO 63120	1	Commander US Army Missile Command ATTN: DRSMI-R Redstone Arsenal, AL 35809
1	Director US Army Air Mobility Research and Development Laboratory Ames Research Center Moffett Field, CA 94035	1	Commander US Army Missile Command ATTN: DRSMI-YDL Redstone Arsenal, AL 35809
1	Commander US Army Communications Rsch and Development Command ATTN: DRDCO-PPA-SA Fort Monmouth, NJ 07703		

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
2	Commander US Army Missile Command ATTN: MICON-XS/Chief Scientist Technical Library Redstone Arsenal, AL 35809	1	Commander US Army Research Office P.O. Box 12211 Research Triangle Park NC 27709
2	Commander US Army Natick Research and Development Command ATTN: DRXRE/Dr. D. Sieling DRXNM-UE Arthur Johnson Natick, MA 01762	4	Commander US Army Nuclear Agency ATTN: ACTA-NAW MONA-WE Technical Library MAJ Joe Sims 7500 Backlick Rd, Bldg. 2073 Springfield, VA 22150
1	Commander US Army Tank Automotive Rsch and Development Command ATTN: DRDTA-111 Warren, MI 48090	1	Commander US Army TRADOC ATTN: ATCD-SA, Mr. Oscar Wells Fort Monroe, VA 23651
1	Commander US Army Foreign Science and Technology Center ATTN: Rsch & Concepts Branch 220 7th Street, NE Charlottesville, VA 22901	2	Director US Army TRADOC Systems Analysis Activity ATTN: LTC John Hesse ATAA-SL, Tech Lib White Sands Missile Range NM 88002
1	Commander US Army Logistical Center ATTN: ATCL-SCA Mr. Robert Cameron Fort Lee, VA 23801	1	Commander USA Combined Arms Combat Developments Activity ATTN: ATCA-CO, Mr. L.C. Pleger Fort Leavenworth, KS 66027
3	Commander US Army Materials and Mechanics Research Center ATTN: Technical Library John Mescall Richard Shea Watertown, MA 02172	1	Commandant Interservice Nuclear Weapons School ATTN: Technical Library Kirtland AFB, NM 87115
		1	Chief of Naval Material ATTN: MAT 0323 Department of the Navy Arlington, VA 22217

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
2	Chief of Naval Operations ATTN: OP-03EG OP-985F Department of the Navy Washington, DC 20350	2	Commander Naval Ship Engineering Ctr ATTN: Technical Library NSEC 6105G Hyattsville, MD 20782
1	Chief of Naval Research ATTN: N. Perrone Department of the Navy Washington, DC 20360	1	Commander David W. Taylor Naval Ship Research & Development Ctr ATTN: Lib Div, Code 522 Bethesda, MD 20084
3	Director Strategic Systems Projects Ofc ATTN: NSP-43, Tech Lib NSP-273 NSP-272 Department of the Navy Washington, DC 20360	1	Commander Naval Surface Weapons Center ATTN: DX-21, Library Br. Dahlgren, VA 22448
1	Commander Naval Electronic Systems Com ATTN: PME 117-21A Washington, DC 20360	3	Commander Naval Surface Weapons Center ATTN: Code WA501/Naval Nuclear Programs Office Code WX21/Tech Lib Code 240/C.J. Aronson Silver Spring, MD 20910
3	Commander Naval Facilities Engineering Command ATTN: Code 03A Code 04A Technical Library Washington, DC 20360	2	Commander Naval Weapons Center ATTN: Code 533, Tech Lib Code 33804, M. Keith China Lake, CA 93555
2	Commander Naval Sea Systems Command ATTN: ORD-91313 Library Code 03511 Department of the Navy Washington, DC 20362	2	Commander Naval Ship Research and Development Center Facility Underwater Explosions Research Division ATTN: Code 17, W.W. Murray Technical Library Portsmouth, VA 23709
4	Officer-in-Charge Civil Engineering Laboratory Naval Constr Btn Ctr ATTN: Stan Takahashi R. J. Odello John Crawford Technical Library Port Hueneme, CA 93041	2	Commander Naval Weapons Evaluation Facility ATTN: Document Control R. Hughes Kirtland AFB Albuquerque, NM 87117

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Commander Naval Research Laboratory ATTN: Code 2027, Tech Lib Washington, DC 20375	1	AFWL/SUL, Jimmie L. Bratton Kirtland AFB, NM 87117
1	Superintendent Naval Postgraduate School ATTN: Code 2124 Tech Reports Lib Monterey, CA 93940	1	AFWL/R. Henny Kirtland AFB, NM 87117
1	HQ USAF (IN) Washington, DC 20330	1	AFWL/SUL, M. A. Plamondon Kirtland AFB, NM 87117
1	HQ USAF (PRE) Washington, DC 20330	2	Commander-in-Chief Strategic Air Command ATTN: NRI-STINFO Lib SPFS Offutt AFB NB 68113
2	AFSC (DLCAW; Tech Lib) Andrews AFB Washington, DC 20331	1	AFIT (Lib Bldg. 640, Area B) Wright-Patterson AFB Ohio 45433
2	ADTC (ADBRL-2; Tech Lib) Eglin AFB, FL 32542	4	FTD (TDFBD; TDFPMG; ETET, CPT R.C. Husemann; TD/BTA/Lib) Wright-Patterson AFB Ohio 45433
2	AFATL (DLYV, P. Nash) Eglin AFB, FL 32542	1	Director US Bureau of Mines ATTN: Technical Library Denver Federal Center Denver, CO 80225
1	AFATL (DLYV, Jim Flint) Eglin AFB, FL 32542	1	Director US Energy Research and Development Administration Albuquerque Operations Office ATTN: Document Control for Tech Lib P. O. Box 5400 Albuquerque, NM 87115
2	RADC (EITLD/Docu Lib; EMREC/R.W. Mair) Griffiss AFB, NY 13340		
1	AFWL/DE-I Kirtland AFB, NM 87117		
1	AFWL/DEX Kirtland AFB, NM 87117		

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	Director Lawrence Livermore Lab ATTN: L.W. Woodruff/L-96 P.O. Box 808 Livermore, CA 94550	4	Director Los Alamos Scientific Lab ATTN: Doc Control for Rpts Lib R. A. Gentry G. R. Spillman Al Davis P.O. Box 1663 Los Alamos, NM 87544
1	Director Lawrence Livermore Lab ATTN: Jack Kahn/L-7 P.O. Box 808 Livermore, CA 94550	1	US Energy Research and Development Administration Nevada Operations Office ATTN: Doc Control for Tech Lib P.O. Box 14100 Las Vegas, NV 89114
1	Director Lawrence Livermore Lab ATTN: Tech Info Dept L-3 P.O. Box 808 Livermore, CA 94550	6	Sandia Laboratories ATTN: Doc Control for 3141 Sandia Rpt Collection A. M. Chaban M. L. Merritt L. J. Vortman W. Roherty L. Hill P.O. Box 5800 Albuquerque, NM 87115
1	Director Lawrence Livermore Lab ATTN: R. G. Dong/L-90 P.O. Box 808 Livermore, CA 94550	1	Sandia Laboratories Livermore Laboratory ATTN: Doc Control for Tech Lib P.O. Box 969 Livermore, CA 94550
1	Director Lawrence Livermore Lab ATTN: Ted Butkovich/L-200 P.O. Box 808 Livermore, CA 94550	1	Director National Aeronautics and Space Administration Scientific and Technical Information Facility P.O. Box 8757 Baltimore/Washington International Airport, MD 21240
1	Director Lawrence Livermore Lab ATTN: Robert Schock/L-437 P.O. Box 808 Livermore, CA 94550		
1	Director Lawrence Livermore Lab ATTN: J. R. Hearst/L-205 P.O. Box 808 Livermore, CA 94550		

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
3	Aerospace Corporation ATTN: Tech Info Services (2 cys) P. N. Mathur P.O. Box 92957 Los Angeles, CA 90009	2	California Research and Technology, Inc. ATTN: Ken Kreyenhagen Technical Library 6929 Variel Avenue Woodland Hills, CA 91364
1	Agbabian Associates ATTN: M. Agbabian 250 North Nash Street El Segundo, CA 90245	1	Calspan Corporation ATTN: Technical Library P.O. Box 400 Buffalo, NY 14221
1	Applied Theory, Inc. ATTN: John G. Trulio 1010 Westwood Blvd. Los Angeles, CA 90024	1	Civil/Nuclear Systems Corp ATTN: Robert Crawford 1200 University N.E. Albuquerque, NM 87102
1	Artec Associates, Inc. ATTN: Steven Gill 26046 Eden Landing Road Hayward, CA 94545	1	EG&G, Incorporated Albuquerque Division ATTN: Technical Library P.O. Box 10218 Albuquerque, NM 87114
1	AVCO ATTN: Res Lib A830, Rm 7201 201 Lowell Street Wilmington, MA 01887	1	The Franklin Institute ATTN: Zemons Zudans 20th Street and Parkway Philadelphia, PA 19103
1	The BDM Corporation ATTN: Richard Hensley P.O. Box 9274 Albuquerque International Albuquerque, NM 87119	2	General American Trans Corp General American Research Div ATTN: G. L. Neidhardt M. R. Johnson 7449 N. Natchez Avenue Niles, IL 60648
2	The Boeing Company ATTN: Aerospace Library R. H. Carlson P.O. Box 3707 Seattle, WA 98124	1	General Electric Company-TEMPO ATTN: DASIAC P.O. Drawer QQ Santa Barbara, CA 93102

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	General Electric-TEMPO ATTN: E. Bryant 220 S. Main Street, Rm 206 Bel Air, MD 21014	2	Martin Marietta Aerospace Orlando Division ATTN: G. Fotieo Mail Point 505, Craig Luongo P.O. Box 5837 Orlando, FL 32805
2	Hazeltine Corp. ATTN: Carl Meinen Greenlawn, NY 11740	3	McDonnell Douglas Astronautics Corporation ATTN: Robert W. Halprin Mr. C. Gardiner Dr. P. Lewis 5301 Bolsa Avenue Huntington Beach, CA 92647
1	J. H. Wiggins Co., Inc. ATTN: John Collins 1650 South Pacific Coast Highway Redondo Beach, CA 90277	2	Merrity Cases, Inc. ATTN: J. L. Merritt Technical Library P.O. Box 1206 Redlands, CA 92373
5	Kaman Avidyne ATTN: Dr. N.P. Hobbs (4 cys) Mr. S. Criscione 83 Second Avenue Northwest Industrial Park Burlington, MA 01830	1	Meteorology Research, Inc. ATTN: W. D. Green 454 West Woodbury Road Altadena, CA 91001
3	Kaman Sciences Corporation ATTN: Library P. A. Ellis F. H. Shelton 1500 Garden of the Gods Road Colorado Springs, CO 80907	1	The Mitre Corporation ATTN: Library P.O. Box 208 Bedford, MA 01730
1	Kaman Sciences Corporation ATTN: Don Sachs Suite 855 101 Continental Boulevard El Segundo, CA 90245	1	Pacific Sierra Research Corp ATTN: Dr. Harold Brode 1456 Cloverfield Boulevard Santa Monica, CA 90404
1	Lockheed Missiles & Space Co. ATTN: Technical Library P.O. Box 504 Sunnyvale, CA 94088	2	Pacifica Technology ATTN: G. Kent R. Bjork P.O. Box 148 Del Mar, CA 92014

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
5	Physics International Corp ATTN: Robert Swift Charles Godfrey Larry A. Behrmann Fred Sauer Technical Library 2700 Merced Street San Leandro, CA 94577	2	Science Applications, Inc. ATTN: Technical Library Michael McKay P.O. Box 2351 La Jolla, CA 92038
3	R&D Associates ATTN: Dr. Albert L. Latter William B. Wright A. Kuhl P.O. Box 9695 Marina del Rey, CA 90291	1	Science Systems and Software ATTN: C. E. Needham P.O. Box 8243 Albuquerque, NM 87198
4	R&D Associates ATTN: Jerry Carpenter Sheldon Schuster J. G. Lewis Technical Library P.O. Box 9695 Marina del Rey, CA 90291	4	Systems, Science & Software ATTN: Donald R. Grine Ted Cherry Thomas D. Riney Technical Library P.O. Box 1620 La Jolla, CA 92037
1	R&D Associates ATTN: Henry Cooper Suite 500 1401 Wilson Boulevard Arlington, VA 22209	3	Terra Tek, Inc. ATTN: Sidney Green A. H. Jonas Technical Library 420 Wakara Way Salt Lake City, UT 84108
1	The Rand Corporation ATTN: C. C. Mow 1700 Main Street Santa Monica, CA 90406	2	Tetra Tech, Inc. ATTN: Li-San Hwang Technical Library 630 North Rosemead Blvd. Pasadena, CA 91107
2	Science Applications, Inc. ATTN: Ma Layson John Cockayne 8400 Westpart Drive McLean, VA 22102	7	TRW Systems Group ATTN: Paul Lieberman Benjamin Sussholtz Norm Lipner William Rowan Jack Farrell Pravin Bhutta Tech Info Ctr/S-1930 One Space Park Redondo Beach, CA 92078
1	Science Applications, Inc. 2450 Washington Avenue Suite 120 San Leandro, CA 94577		

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
1	TRW Systems Group ATTN: Greg Hulcher San Bernardino Operations P.O. Box 1310 San Bernardino, CA 92402	2	Denver Research Institute University of Denver ATTN: Mr. J. Wisotski Technical Library P.O. Box 10127 Denver, CO 80210
2	Union Carbide Corporation Holifield National Laboratory ATTN: Doc Control for Tech Lib Civil Defense Research Proj P.O. Box X Oak Ridge, TN 37830	3	IIT Research Institute ATTN: Milton R. Johnson R. E. Welch Technical Library 10 West 35th Street Chicago, IL 60616
1	Universal Analytics, Inc. ATTN: E. I. Field 7740 W. Manchester Blvd. Playa del Rey, CA 90291	2	Lovelace Foundation for Medical Education ATTN: Asst. Dir of Research/ Robert K. Jones Technical Library 5200 Gibson Blvd., SE Albuquerque, NM 87109
1	Weidlinger Assoc. Consulting Engineers ATTN: M. L. Baron 110 East 59th Street New York, NY 10022	1	Massachusetts Institute of Technology Aeroelastic and Structures Research Laboratory ATTN: Dr. E. A. Witmer Cambridge, MA 02139
1	Westinghouse Electric Co. Marine Division ATTN: W. A. Votz Hendy Avenue Sunnyvale, CA 94008	2	Southwest Research Institute ATTN: Dr. W. E. Baker A. B. Wenzel 8500 Culebra Road San Antonio, TX 78206
2	Battelle Memorial Institute ATTN: Technical Library R. W. Klingsmith 505 King Avenue Columbus, OH 43201	2	SRI International ATTN: Dr. G. R. Abrahamson Carl Peterson 333 Ravenswood Avenue Menlo Park, CA 94025
1	California Institute of Technology ATTN: T. J. Ahrens 1201 E. California Blvd. Pasadena, CA 91109		

DISTRIBUTION LIST

<u>No. of Copies</u>	<u>Organization</u>
1	University of Dayton Industrial Security Super. KL-505 ATTN: H. F. Swift 300 College Park Avenue Dayton, OH 45409
1	University of Illinois Consulting Engineering Services ATTN: Nathan M. Newmark 1211 Civil Engineering Bldg Urbana, IL 61801
2	The University of New Mexico The Eric H. Wang Civil Engineering Research Facility ATTN: Larry Bickle Neal Baum University Station Box 188 Albuquerque, NM 87131
2	Washington State University Administration Office ATTN: Arthur Miles Hohorf George Duval Pullman, WA 99163

Aberdeen Proving Ground

Dir, USAMSAA
ATTN: DRXSY-D
DRXSY-MP, H. Cohen
Cdr, USATECOM
ATTN: DRSTE-TO-F
Dir, USACSL
Bldg. E3516, EA
ATTN: DRDAR-CLB-PA

USER EVALUATION OF REPORT

Please take a few minutes to answer the questions below; tear out this sheet, fold as indicated, staple or tape closed, and place in the mail. Your comments will provide us with information for improving future reports.

1. BRL Report Number _____

2. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which report will be used.)

3. How, specifically, is the report being used? (Information source, design data or procedure, management procedure, source of ideas, etc.) _____

4. Has the information in this report led to any quantitative savings as far as man-hours/contract dollars saved, operating costs avoided, efficiencies achieved, etc.? If so, please elaborate.

5. General Comments (Indicate what you think should be changed to make this report and future reports of this type more responsive to your needs, more usable, improve readability, etc.) _____

6. If you would like to be contacted by the personnel who prepared this report to raise specific questions or discuss the topic, please fill in the following information.

Name: _____

Telephone Number: _____

Organization Address: _____

----- FOLD HERE -----

Director
US Army Ballistic Research Laboratory
Aberdeen Proving Ground, MD 21005




NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE, \$300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON, DC
POSTAGE WILL BE PAID BY DEPARTMENT OF THE ARMY

Director
US Army Ballistic Research Laboratory
ATTN: DRDAR-TSB
Aberdeen Proving Ground, MD 21005



----- FOLD HERE -----

1 NOV 2001

MEMORANDUM FOR Chief, Technical Library, ATTN: Ms. L. LeTendre

SUBJECT: Distribution Statements for Ballistic Research
Laboratory Reports

1. References:

a. Ballistic Research Laboratory Memorandum Report No. 397, "An Improved Tourmaline Air Blast Gage", by T. D. Carr and M. A. Bakinowski, October 1945, AD number 494667, UNCLASSIFIED, enclosed.

b. Ballistic Research Laboratories Memorandum Report No. 1778, "Detonation Pressure Measurements in TNT and OCTOL", by R. Jameson and A. Hawkins, August 1966, AD number 802251, UNCLASSIFIED, enclosed.

c. Ballistic Research Laboratory Memorandum Report No. ARBRL-MR-03115, "Blast Computations over a Hemicylindrical Aircraft Shelter", by J. Wortman, July 1981, AD number B058960, UNCLASSIFIED, enclosed.

d. Ballistic Research Laboratory Memorandum Report No. ARBRL-MR-03125, "Combinatorial Geometry Computer Models of Sitting and Standing Crew Personnel" by L. R. Kruse and C. H. Lee, August 1981, AD number B060185, UNCLASSIFIED, enclosed.

e. Ballistic Research Laboratories Report No. 734, "Response of Air Blast Gauges of Various Shapes as a Function of Pressure Level", by S. T. Marks, August 1950, AD number 801219, UNCLASSIFIED, enclosed.

f. Ballistic Research Laboratories Report No. 775, "Response of Air Blast Gauges of Various Shapes to One-Pound Spherical Pentolite Charges as a Function of Pressure Level", by S. T. Marks, September 1951, AD number 801726, UNCLASSIFIED, enclosed.

2. Subject area experts have reviewed the referenced reports and have determined that they do not contain any information that requires limited distribution. Document release authorities have approved the reports for public release. This office will notify the Defense Technical Information Center about the change in the distribution statements.

AMSRL-CS-IO-SC

SUBJECT: Distribution Statements for Ballistic Research
Laboratory Reports

3. Our action officer is Douglas Kingsley, X36960.

Encl

Benjamin E. Bruso

BENJAMIN E. BRUSO

Team Leader, Security/CI Office

CF Dir, CISD, ATTN: Dr. N. Radhakrishna