

AC A089191

12 LEVEL II

AD-E 300 899

✓ DNA 4829F

DEVELOPMENT OF A DUST CLOUD MASS MEASURING SYSTEM

Kaman Sciences Corporation
P.O. Box 7463
Colorado Springs, Colorado 80933

1 January 1979

Final Report for Period 1 June 1978—31 December 1978

CONTRACT No. DNA 001-78-C-0207

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.

THIS WORK SPONSORED BY THE DEFENSE NUCLEAR AGENCY
UNDER RDT&E RMSS CODE B342078462 H35HAXYX95602 H2590D.

Prepared for
Director
DEFENSE NUCLEAR AGENCY
Washington, D. C. 20305

DTIC
ELECTE
SEP 17 1980
S D
B

80 8 21 017

DDG FILE COPY

Destroy this report when it is no longer
needed. Do not return to sender.

PLEASE NOTIFY THE DEFENSE NUCLEAR AGENCY,
ATTN: TISI, WASHINGTON, D.C. 20305, IF
YOUR ADDRESS IS INCORRECT, IF YOU WISH TO
BE DELETED FROM THE DISTRIBUTION LIST, OR
IF THE ADDRESSEE IS NO LONGER EMPLOYED BY
YOUR ORGANIZATION.



18
UNCLASSIFIED

DNA, SRIE

12 87

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER DNA 4829F	2. GOVT ACCESSION NO. AD-A089191	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) DEVELOPMENT OF A DUST CLOUD MASS MEASURING SYSTEM	9	5. TYPE OF REPORT AND DATES COVERED Final Report 1 Jun 78 - 31 Dec 78
6	14	6. PERFORMING ORG. REPORT NUMBER K-79-9U
10	15	8. CONTRACT OR GRANT NUMBER(s) DNA 801-78-C-0207
7. AUTHOR(s) R. Duke	17 X956	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Subtask H35HAXYK956-02
9. PERFORMING ORGANIZATION NAME AND ADDRESS Kaman Sciences Corporation P.O. Box 7463 Colorado Springs, Colorado 80933	11	12. REPORT DATE 1 January 1979
11. CONTROLLING OFFICE NAME AND ADDRESS Director Defense Nuclear Agency Washington, D.C. 20305		13. NUMBER OF PAGES 84
14. MONITORING AGENCY NAME & ADDRESS (If different from Controlling Office) 19 4829F L AD-E 300 899		15. SECURITY CLASS (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES This work sponsored by the Defense Nuclear Agency under RDT&E RMSS Code B342078462 H35HAXYX95602 H2590D.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Dust Cloud Air Drop System Mass Measuring Aerodynamic Collection Canister Development		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report describes the concepts, design feasibility, fabrication and testing of a dust cloud mass measuring system. The early-time (<2 minutes) measuring system featured an aerodynamically designed measuring canister and a helicopter delivery and sighting technique specifically designed for use on MISERS BLUFF Phase II, Events 1 and 2. The report describes the development activities and field testing. Due to operational (not technical) problems, no dust measurements were made in either of the MISERS BLUFF events. Conclusions,		

DD FORM 1473 1 JAN 73 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

389119

DM

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

20. ABSTRACT (Continued)

recommendations and a detailed drawing package of the measuring canister are also presented.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

SUMMARY

With the consideration of multiple aim point basing for weapon systems such as the Air Force MX System, an increasing amount of interest has been shown in the measurement of multiple burst dust cloud properties (e.g. mass and particle distributions). In March of 1978, an intensive program was begun to develop a system to sample clouds generated in the MISERS BLUFF, Phase II, events. The program consisted of three phases including 1) concept and design feasibility, 2) air-drop system development, and 3) participation on MISERS BLUFF, Phase II, Events 1 and 2.

After comprehensive sensor trade-off studies, a light-weight aerodynamically designed canister was selected for further development. This canister featured light-weight aluminum construction, a cyclone dust separator, an active capacitive measurement of the accumulated dust mass which was recorded via an on-board recorder, explosive guillotine actuated closures for protection of the collected sample and a 1.8 meter (6 foot) diameter deceleration parachute for impact survival. The delivery system selected was a helicopter with racks to hold up to six measuring canisters and a simple gravity-seeking targeting device.

As a result of a combination of aerodynamic design problems, sighting inaccuracies and concern about possible impact voiced by agencies with experiments near the detonation site, participation was cancelled on Event 1. After corrective action on the design deficiencies, a simulated dust ingestion field test on 30 July 1978 showed the system to be entirely functional and ready for the Event 2 test. A number of practice drops at the Nevada Test Site also demonstrated an acceptable sighting accuracy.

During Event 2, a countdown delay at 15 minutes prior to detonation required all airborne aircraft to return to their base of operations. When the countdown was resumed, the canister carrying the helicopter was not able to re-establish the delivery sequence in the remaining time and was north of ground zero at detonation time. Although the six measuring canisters were dropped in hopes of penetrating the northern edge of the dust cloud, no measurements were obtained.

Although not successful in the MISERS BLUFF test, laboratory and field testing had shown that the mass measuring canister would actively measure and passively collect accumulated dust as it traversed an early-time dust cloud. The delivery system was unique and functional and had also been demonstrated in many field tests. Except for the measurements during MISERS BLUFF Phase II, Events 1 and 2, all the design goals of the program had been met.

The following are recommendations for system refinements:

- additional active measurement capability.
- softer passive collection techniques with less abrasion and less impact to better preserve sample integrity.
- eliminate the deceleration parachute and design for a high velocity impact.
- electronic tracking and release point identification.
- examination of other delivery methods for a smaller designed canister.
- design of a positive positioning system to assure delivery over ground zero at a predetermined time.

- refinement of the communication system with the airborne delivery platform.
- refinement of the lanyard system used for initiation of functions starting at release from the helicopter.

These recommendations are discussed in detail in Section 5.

ACCESSION for		
NTIS	White Section	<input checked="" type="checkbox"/>
DDC	Buff Section	<input type="checkbox"/>
UNANNOUNCED		<input type="checkbox"/>
JUSTIFICATION _____		
BY _____		
DISTRIBUTION/AVAILABILITY CODES		
Dist.	AVAIL. and/or	SPECIAL
A		

PREFACE

This is the final report for Contract DNA 001-78-C-0207 describing the design, development, and testing of a dust cloud mass measuring system at Kaman Sciences Corporation (KSC). This work was sponsored by the Defense Nuclear Agency (DNA) under RDT&E RMSS Code B3420 28462 H35HAXYX956-02 and 04 H2590D. The activities described in this report were conducted from March of 1978 through August 1978, which was the detonation of MISERS BLUFF, Phase II, Event 2.

This program was administered by Captain A. T. Hopkins. Program Management at KSC was under the direction of Tom Meagher with Richard Duke, the Project Manager. Other members of the scientific team were Victor Allen, Doug Elder, Frank Hassey, Fred Kimbley, Neil Koozer, Moe Morris, and Ted Tetman.

Conversion factors for U.S. customary
to metric (SI) units of measurement.

To Convert From	To	Multiply By
angstrom	meters (m)	1.000 000 X E -10
atmosphere (normal)	kilo pascal (kPa)	1.013 25 X E +2
bar	kilo pascal (kPa)	1.000 000 X E +2
barn	meter ² (m ²)	1.000 000 X E -28
British thermal unit (thermochemical)	joule (J)	1.054 350 X E +3
calorie (thermochemical)	joule (J)	4.184 000
cal (thermochemical)/cm ²	mega joule/m ² (MJ/m ²)	4.184 000 X E -2
curie	*giga becquerel (GBq)	3.700 000 X E +1
degree (angle)	radian (rad)	1.745 329 X E -2
degree Fahrenheit	degree kelvin (K)	$T_K = (T_F + 459.67)/1.8$
electron volt	joule (J)	1.602 19 X E -19
erg	joule (J)	1.000 000 X E -7
erg/second	watt (W)	1.000 000 X E -7
foot	meter (m)	3.048 000 X E -1
foot-pound-force	joule (J)	1.355 818
gallon (U.S. liquid)	meter ³ (m ³)	3.785 412 X E -3
inch	meter (m)	2.540 000 X E -2
jerk	joule (J)	1.000 000 X E +9
joule/kilogram (J/kg) (radiation dose absorbed)	Gray (Gy)	1.000 000
kilotons	terajoules	4.183
kip (1000 lbf)	newton (N)	4.448 222 X E +3
kip/inch ² (ksi)	kilo pascal (kPa)	6.894 757 X E +3
klap	newton-second/m ² (N-s/m ²)	1.000 000 X E +2
micron	meter (m)	1.000 000 X E -6
mil	meter (m)	2.540 000 X E -5
mile (international)	meter (m)	1.609 344 X E +3
ounce	kilogram (kg)	2.834 952 X E -2
pound-force (lbs avoirdupois)	newton (N)	4.448 222
pound-force inch	newton-meter (N·m)	1.129 848 X E -1
pound-force/inch	newton/meter (N/m)	1.751 268 X E +2
pound-force/foot ²	kilo pascal (kPa)	4.788 026 X E -2
pound-force/inch ² (psi)	kilo pascal (kPa)	6.894 757
pound-mass (lbm avoird. pois)	kilogram (kg)	4.535 924 X E -1
pound-mass-foot ² (moment of inertia)	kilogram-meter ² (kg·m ²)	4.214 011 X E -2
pound-mass/foot ³	kilogram/meter ³ (kg/m ³)	1.601 846 X E +1
rad (radiation dose absorbed)	**Gray (Gy)	1.000 000 X E -2
roentgen	coulomb/kilogram (C/kg)	2.579 760 X E -4
shake	second (s)	1.000 000 X E -
slug	kilogram (kg)	1.459 390 X E +1
torr (mm Hg, 0° C)	kilo pascal (kPa)	1.333 22 X E -1

*The becquerel (Bq) is the SI unit of radioactivity; 1 Bq = 1 event/s.

**The Gray (Gy) is the SI unit of absorbed radiation.

A more complete listing of conversions may be found in "Metric Practice Guide E 380-74,"
American Society for Testing and Materials.

TABLE OF CONTENTS

Section	Title	Page
	SUMMARY	1
	PREFACE	4
1	INTRODUCTION	9
2	PROGRAM PLAN	10
	2.1 Program Outline	10
3	MEASURING SYSTEM DESIGN	12
	3.1 Feasibility Study	12
	3.2 Aerodynamic Design	15
	3.3 Mechanical Design	19
	3.4 Electronics Design	22
	3.5 Delivery System Design	24
4	CONCLUSIONS	38
5	RECOMMENDATIONS	40
	APPENDIX A	45
	APPENDIX B	75

LIST OF ILLUSTRATIONS

Figure	Title	Page
1	Photograph of Dust Measuring Canister	16
2	Canister Dust Measuring System	18
3	Canister Design	20
4	Electrical Block Diagram	23
5	Helicopter Delivery System	25
6	Loading of the Canisters on the Helicopter	26
7	Loaded Helicopter in Flight	27
8	Dust Measuring Canister-System Diagram	28
9	Probability of Impact versus Canister CEP, BRL Experiments	33
10	Probability of Impact versus Canister CEP, DRI Camera Stations	34
11	Probability of Impact versus Canister CEP, SRI Experiments	35
12	Probability of Impact versus Canister CEP, UK Experiments	36
13	Probability of Impact versus Canister, Boeing Experiments	37

LIST OF TABLES

Table	Title	Page
1	Measurement and Collection System Comparisons	13
2	Drop History	31

SECTION 1
INTRODUCTION

This final report describes the program for the development of a dust cloud mass measuring system. Such a system was designed to actively measure the particle size and apparent spatial density as well as collect a sample of dust lofted into the air by a surface detonation of high explosive. The delivery system was developed to permit several canisters to accurately measure an early-time (< 2 minute) dust cloud.

To meet the objectives of the program, it was decided that such a measuring system should be a moving system. The measuring device would traverse the cloud at high velocity and early-time to collect and measure the dust sample. Active measurements of the accumulated dust sample would be recorded on an on-board tape recorder for recovery after impact. Several measuring techniques were considered in the measuring canister to increase the data reliability and time and spatial resolution. These included, for sample collection, 1) filter paper or cloth separation, 2) cyclone separation, and 3) compartment or bins that could be varied with time. Techniques considered for active measurements included 1) acoustic impact, 2) capacitive impact, 3) inline capacitive, and 4) integrated capacitive. For the delivery systems, three methods were considered. These were 1) a howitzer or mortar propulsion/aiming mechanism, 2) a fixed wing aircraft, and 3) a rotary wing (helicopter) delivery system.

Included in this report are the details of the program plan and measuring system design. The measuring system design discussion describes the concept feasibility, aerodynamic, mechanical, and electrical design as well as the development of the delivery system. The program conclusions and recommendations for system improvements are also included.

SECTION 2
PROGRAM PLAN

2.1 Program Outline

The program plan for the development of a dust cloud mass measuring system included three phases covering a period of six months starting in March of 1978. The three phases were 1) Engineering Feasibility Demonstration, 2) Air Drop System Development, and 3) Dust Cloud Measurements - MISERS BLUFF Event 2. Originally our participation was only planned on Event 1 (Phase I and II) which was to be detonated on 28 June 1978. Later, the program was ammended to include more development of the sighting and delivery system and participation on Event 2 which was on August 30, 1978. The detailed description of the tasks for each phase was as follows:

Phase I. Engineering Feasibility Demonstration

1. Sensing technique evaluation
2. Air-drop canister design

Phase II. Air-drop system development and Test

1. Delivery system evaluation
2. Sighting and Mounting Rack Design
3. System Field Testing
4. Participation on MISERS BLUFF, Phase II, Event 1

Phase III. Dust Cloud Measurements on MISERS BLUFF
Event 2

1. Event 1 Performance and Data Evaluation
2. Event 2 Design Improvements
3. Fabrication and Fielding of Four or More
Units for Event 2
4. Design and Test an Accurate Sighting Mechanism

5. Fabrication of Test Canisters for Accuracy Testing
6. Test Deployment and Sighting Mechanism Evaluation
7. Event 2 Performance and Data Evaluation
8. Final Report Preparation

Although the original program plan called for our participation on Event 1 of MISERS BLUFF, several problems, including aerodynamic design, sighting accuracy and concern of other experimenters about possible damage from canister impact led to the cancellation of our participation on June 23, 1978.

On Event 2, a 15 minute hold prior to the detonation time made it necessary for the helicopter to return to the landing strip. When the countdown was resumed, there was not sufficient time for the helicopter to regain altitude and position prior to the detonation. Although the helicopter crew tried to obtain a substitute position at the northern edge of the dust cloud, the drop of the six measuring canisters failed to penetrate the edge of the dust cloud; hence, no measurements were obtained. The canisters had to be dropped by T + 2 minutes to avoid compromising the prime cloud-sampling aircraft experiments.

SECTION 3
MEASURING SYSTEM DESIGN

3.1 Feasibility Study

As noted in the Introduction, several options existed concerning measuring technique, housing design, and delivery system. Also the realistic restrictions of time were to be considered with the first event only four months away from the start of the program.

The arbitrary decision to make the measuring device a moving system with on-board recording and multiple measurements was the starting point of the study. Since the problems of dust cloud particle sensing and collection most often can be combined, the following options appeared most reasonable:

1. Acoustic and capacitive impact (front)/inline capacitive flow-through/filter bag or paper separation.
2. Acoustic and capacitive impact (front)/cyclone separation/integrated capacitive collection.
3. Same as (2) except the use of bins or compartments could increment the collection with time.

The advantages and disadvantages of each of the foregoing systems are presented in Table 1. After some laboratory testing, analytical study, review of current literature and consultation with specialists, a simple system consisting of cyclone separation with integrated capacitance collection was chosen. Selection of this system was influenced by the limited development time

Table 1. Measurement and Collection System Comparisons

<u>Measurement or Collection System</u>	<u>Advantages</u>	<u>Disadvantages</u>
Acoustic Impact	Actively measure particle density (number and frequency of impacts) altitude (impulse time.) Most of the basic technology exists for development.	Response to dynamic range of particle size beyond state-of-art in electronics Collection and storage of impact data requires development of sophisticated digital electronics for small on-board digital recorder.
Capacitive Impact	Actively measures particle density (number and frequency of impacts) and size (magnitude of impact)	Laboratory data indicated that with present technology, no system could be designed to sense particle sizes over the anticipated centimeter to micron range. Extensive development required.
Capacitive in-line	Actively measures particle density (amount passing through capacitance sensors).	Difficult to directly measure particle size. Has same disadvantages as capacitive impact.
Integrated Capacitive	Actively measures particle density (amount accumulated with time). With tapered collection chamber, sensitivity can be varied with apparent sample size.	Does not actively measure particle size.
Collecting Bins	Used with integrated system, bins can be varied with time and separate sample into various altitude regions. From this an average density and particle size can be expressed for the various regions.	Compartment vs. time mechanism needs to be developed.
Filter Paper or Cloth	Passive collects sample. Could be designed for low impact speed collection to protect particle size.	Could be torn or ripped by high velocity particle.
Cyclone Separator	Commercially available in small sizes. Works well with integrated capacitance measuring system.	Particles are impacted on several surfaces during collection. Larger particles most likely broken into smaller sizes.

before Event 1, however, it was hoped that continued activities leading up to Event 2 would expand our measuring technique capability.

For the delivery system, fixed-wing aircraft, helicopter and powder guns (either mortar or howitzer) were considered. For both the fixed-wing aircraft and powder gun delivery systems, the delivery accuracy depends greatly on a thorough knowledge of the actual aerodynamic performance of the measuring canister. Because of the lack of time to characterize this performance, the only reasonable delivery system choice appeared to be the helicopter system. For a helicopter, the canisters could be dropped from a hover or near-hover position directly above the target.

3.2 Aerodynamic Design

The objectives of the aerodynamic design were that the canister:

1. would have a six inch diameter inlet sampling area to minimize weight as determined by payload characteristics of the helicopter
2. would weigh approximately (178 newtons) 40 pounds to minimize weight as determined by payload characteristics of the helicopter
3. would have a terminal velocity of 106.68 m/sec (350 ft/sec) which it would obtain in the first 1067 meters (3500 feet) of descent
4. would have minimal internal drag associated with the particle collection system
5. would have a low drag exterior surface
6. would have excess aerodynamic stability
7. would have a maximum body diameter of one foot

After careful design analysis and a test drop at Fort Carson, it was decided that a flow-through canister could be designed to meet these goals. The basic design approach was a sleek, thin-walled, reinforced aluminum structure with special rear stabilizing fins and a combined drag coefficient of between 0.2 and 0.4 (based on frontal area). The stabilizing fins were releasable and when released from their mountings, were used to pull the impact deceleration parachute from its housing. A photograph of this design showing some of the external features is shown in Figure 1.


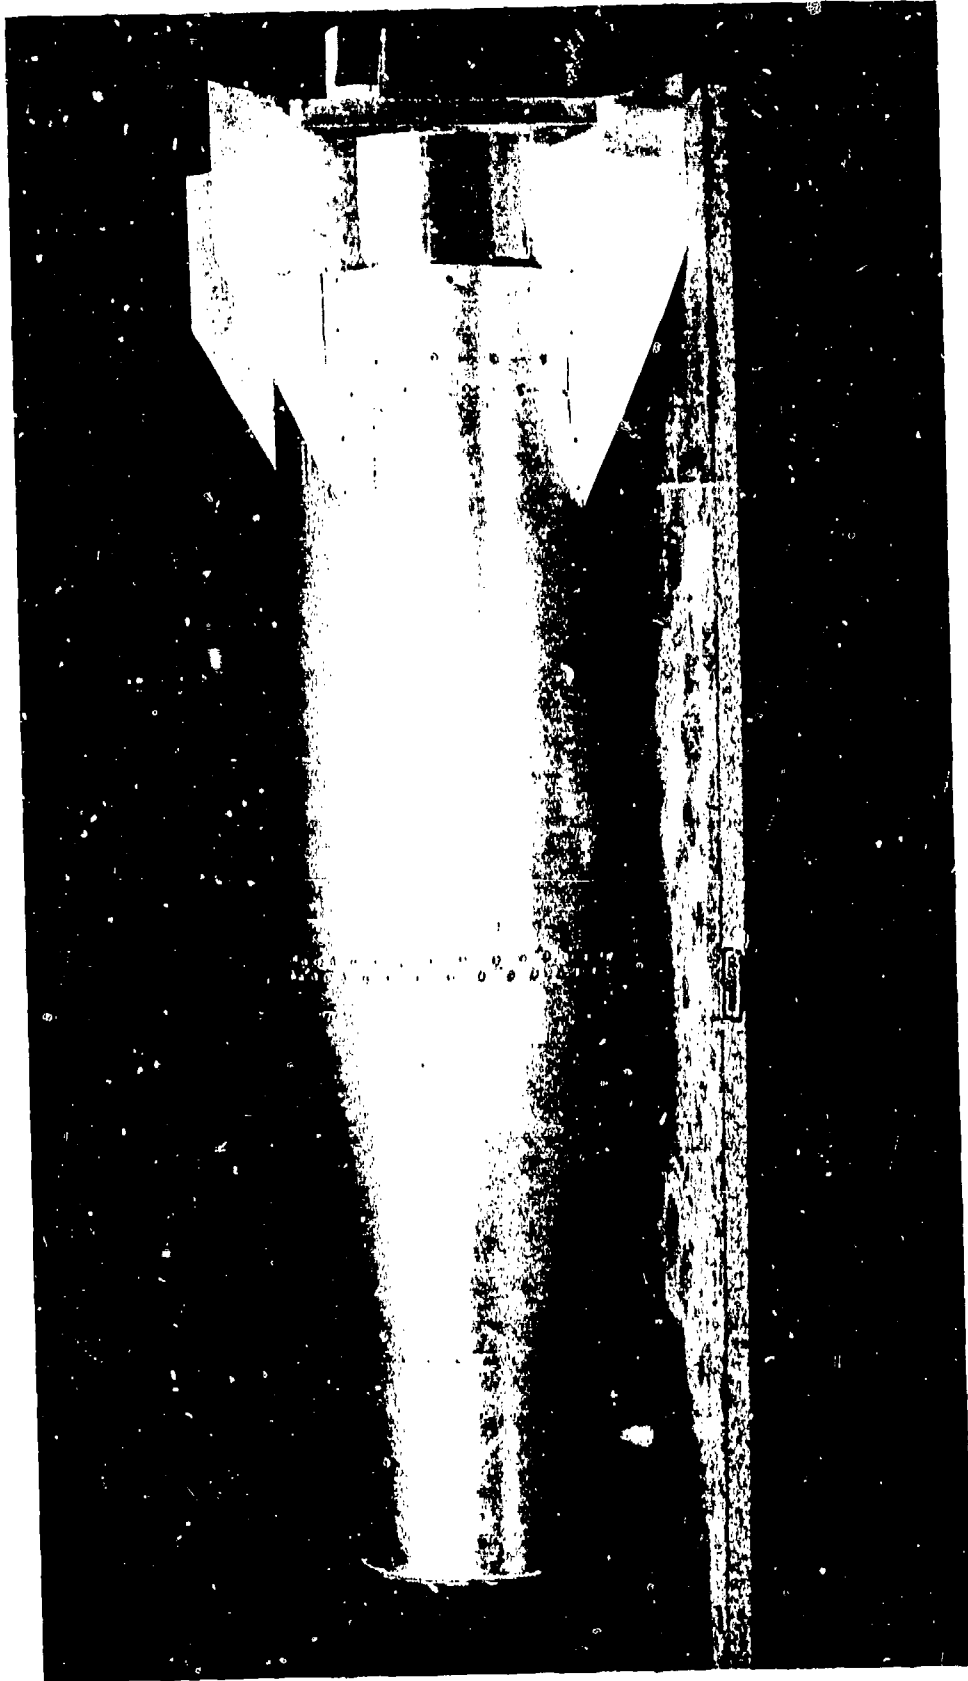


Figure 1. Photograph of Dust Measuring Canister

When the first test units were fabricated, the final location of the center of gravity was considerably aft of the desired location. The unit weight of the canister was also slightly high at 215 newtons (48 pounds). A test drop made in mid June, indicated that the test unit was not statically stable.

A careful examination of both the static and dynamic stability of the canister was made. It was agreed to add (90 newtons) 20 pounds of ballast in the nose and to axially balance the canister statically to eliminate possible dynamic instabilities. In subsequent tests, no aerodynamic instabilities were noted; however, the deployment scheme for the deceleration parachute failed to work. Excessive negative base area pressure was determined to be the cause of the problem and a drag chute was added to the fin assembly. The drag chute aided the design in two ways by providing a positive loading for the fin removal at the proper time and by reducing the higher terminal velocity, caused by the added weight, from over 122 meters per second (400 feet per second) to approximately 79 meters per second (260 feet per second). Both of these factors improve the probability of survival on impact. Details of the final design are shown in Figure 2.

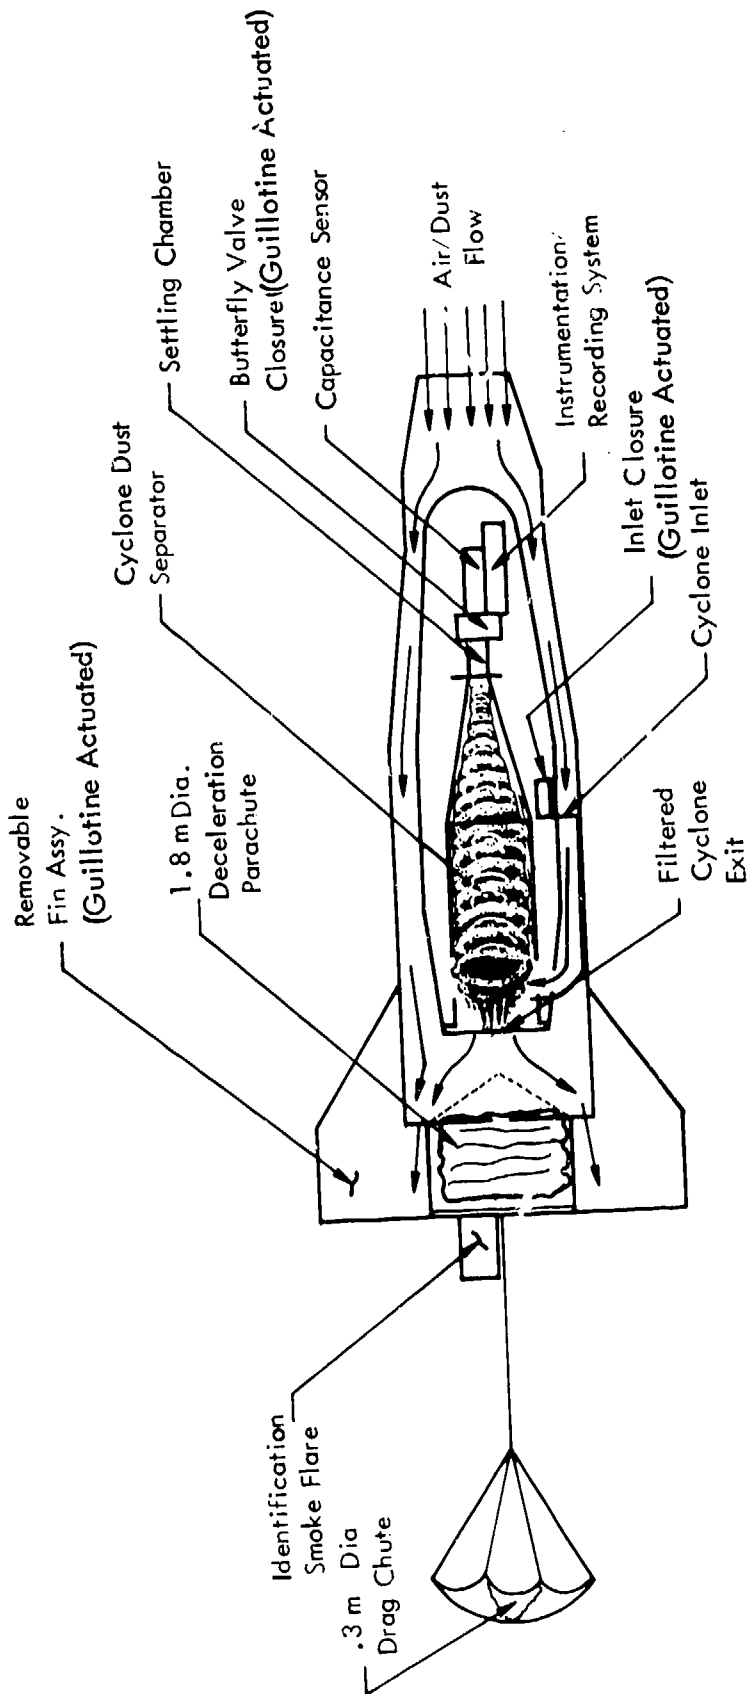

CANISTER DIMENSIONS

Length	1.4 m (54.2 in)
Max. Dia.	.6 m (24 in) at Fin Tips
Body Dia.	.3 m (12 in)
Inlet Dia.	.15 m (6 in)
Weight	289 newtons (65 lbs)


Figure 2. Canister Dust Measuring System

3.3 Mechanical Design

In addition to the noted objectives of the aerodynamic design, the mechanical design added the requirements of 1) impact survivability, 2) sample collection and protection, 3) general mechanical design for aerodynamic configuration, and 4) housing of the various components. In Figure 3, the details of the mechanical design are shown. Detailed drawings of the various parts to the assembly are presented in Appendix A.


Again, the basic approach to making the model was to use a thin wall riveted aluminum assembly mounted to a 4130 aircraft steel "stong-back" rear bulkhead. Both the outer skin, inner pod and fin assembly would be attached to this bulkhead. During impact, the outer skin would buckle and crush thus absorbing and disapating the impact energy and the inner pod containing the cyclone separator and the active instrumentation would survive undamaged.

Other features of the design noted in Figure 3 are the cyclone, the cyclone closure, the cyclone separator, the settling chamber, the closure valve, the flow outlet final filter, the parachute compartment, the stabilizing fins and the smoke flare. In principle, the cyclone is designed around the fact that the particles cannot follow the path of the air stream and are thrown to the outer walls. For the anticipated flow rates of this design, this fact was supposedly true for particles as small as 10 microns in size. These particles then settle into a chamber where they can be collected and measured. The filter on the outlet assures that re-entrained particles can not escape the chamber. The two closures (one at the cyclone entrance and one in the settling chamber) assure total protection for the sample of the collected dust for later evaluation. The closures are both spring-loaded and guillo'ine-actuated. The

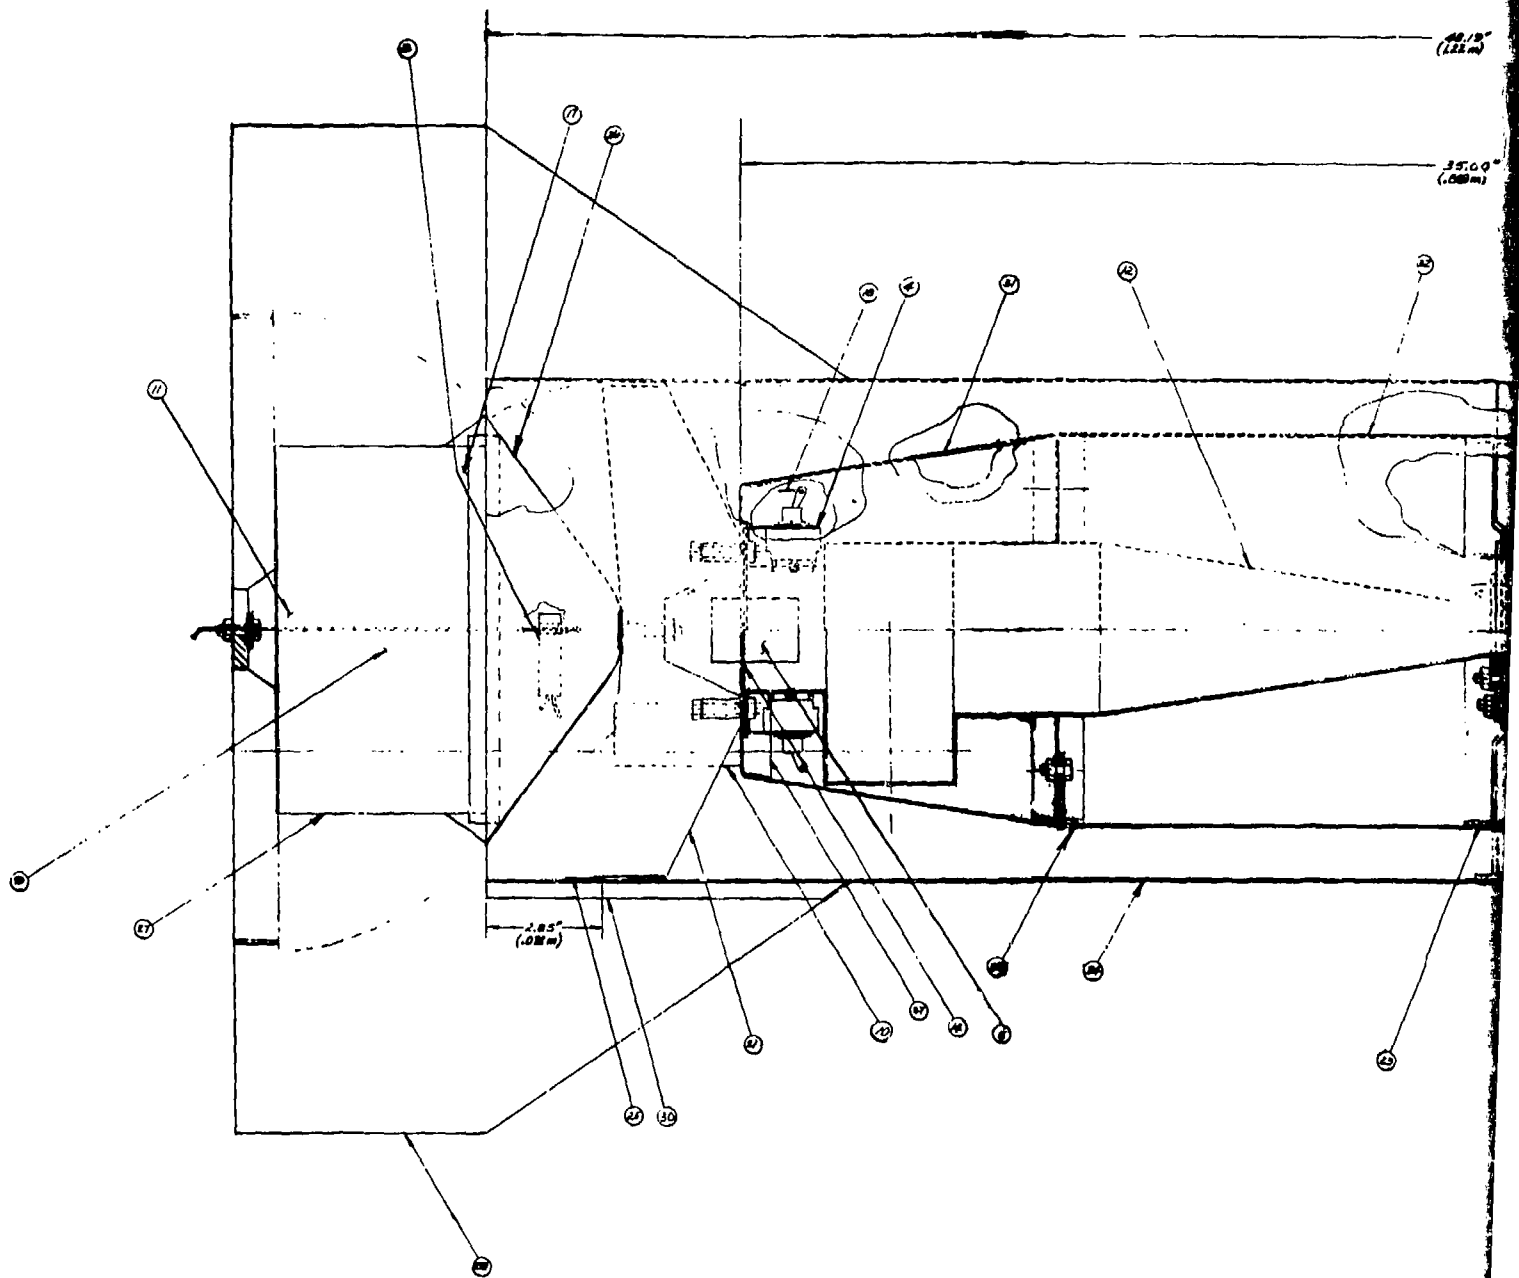

Key to Design Features

- | | | | | | |
|---|--------------------------|----|------------------|----|---------------------|
| ① | Signal Cond. Electronics | ①7 | Trigger Wire | ③3 | Nose Skin |
| ② | Tape Recorder | ②0 | Settling Chamber | ③4 | Aft Shroud |
| ③ | Sensor Assembly | ②1 | Aft Rib | ③5 | Mid Shroud |
| ④ | On-off Switch | ②2 | Mid Rib | ③7 | Cyclone Mtg. Flange |
| ⑤ | Time-delay Relay | ②3 | Forward Rib | ③8 | Inlet Shroud |
| ⑥ | Power Supply | ②4 | Spacer | | |
| ⑦ | Power Supply | ②6 | Flexible Closure | | |
| ⑧ | Guillotines | ②7 | Parachute | | |
| ⑨ | Parachute | ②8 | Fin Assembly | | |
| ⑩ | XQ-3 Cyclone | ③0 | Fin Guides | | |
| ⑪ | Final Filter | ③1 | Aft Skin | | |
| ⑫ | Closure Assembly | ③2 | Mid Skin | | |

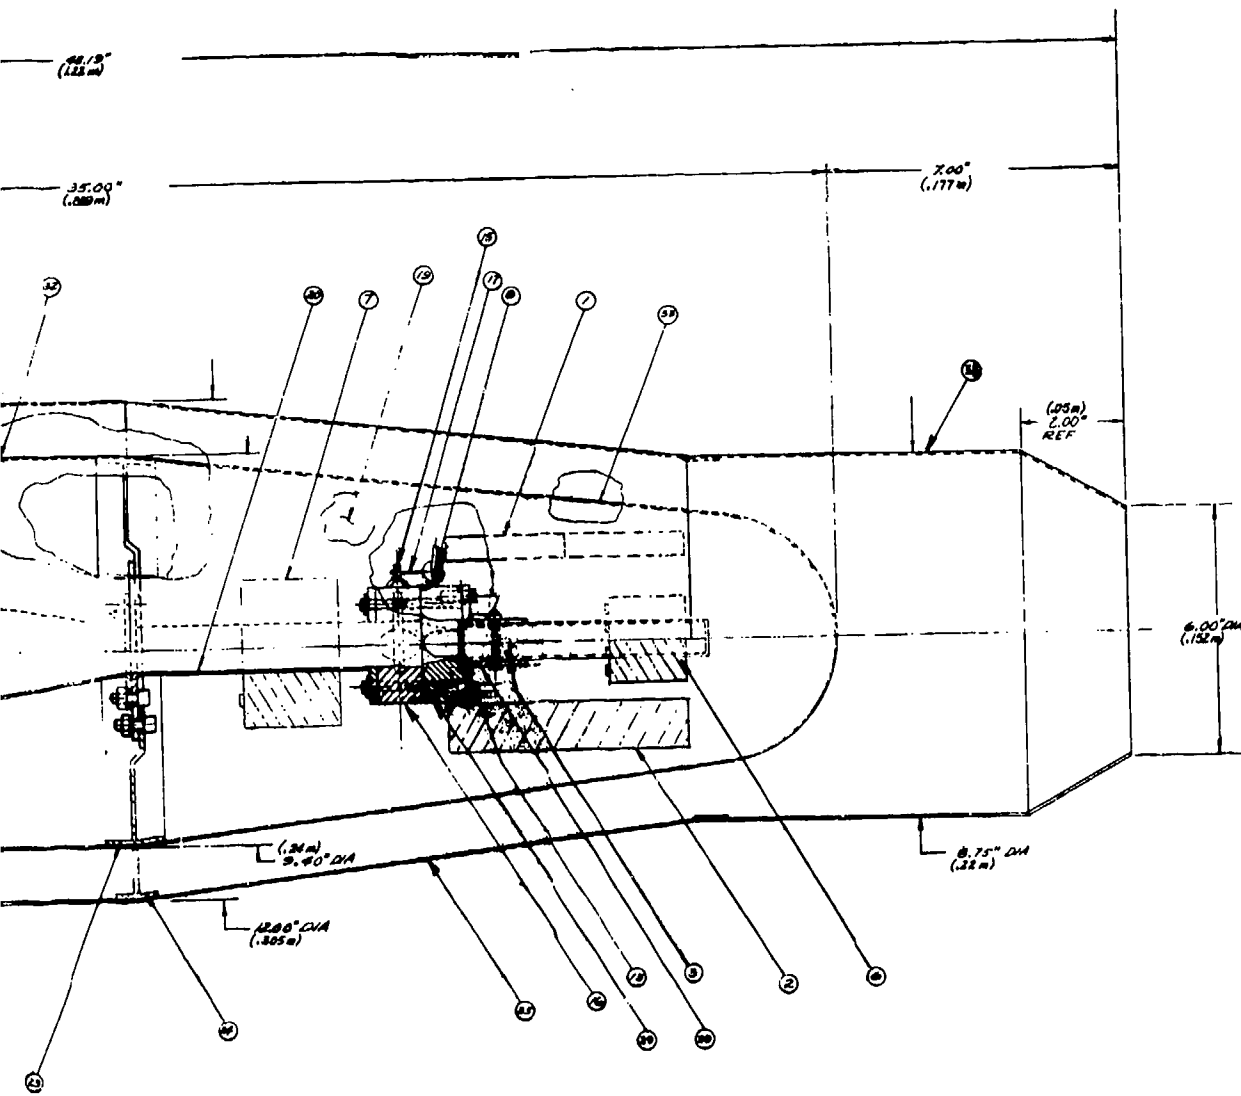

d
 d
 tg. Flange
 pud

FIGURE 3 CANISTER DESIGN

explosively driven guillotine is initiated by an electrical signal from the control electronics. This same type guillotine is used to release the parachute prior to impact.

The fin assembly is primarily for aerodynamic stability but also is used in a parachute removal scheme. A small drag chute was used to overcome a negative base pressure on the fin assembly. The fins were held in position by angle-bracket tracks on the canister body and secured by a steel cable. When the canister approached within 151 to 303 meters (500 to 1000 feet) of impact, the guillotine severed the cable, and the fins and drag chute pulled out the deceleration parachute. The smoke flare attached to the aft end of the fin assembly was used to enhance visual and photographic identification during its flight.

To test the operational aspects of the canister, several tests were performed. The tests included laboratory, vehicle-mounted and helicopter-deployed. Proper functioning of all aspects of the canister operations were verified in these tests. The culmination of such testing came at Butte, Montana on 30 July 1978, where an actual dust measuring canister was dropped. The canister was dropped from 2120 meters (7000 feet) above ground and contained a "tear-apart" tissue bag of dust in the flow inlet. In the test, all aspects of the measuring canister operated properly; i.e., the electronics turned on, dust was collected and measured, the electronics turned off, the guillotines operated at the correct time for dust sample closure and parachute release, the parachute deployed successfully and the canister survived impact with very little damage. Final preparations for Event 2 testing in late August were begun with "targeting" accuracy the only operational issue remaining. This aspect of the program is discussed in Section 3.5, Delivery System.

3.4 Electronics Design

The electrical block diagram for the measuring canister is shown in Figure 4. The objectives of this subsystem were to measure the accumulated dust versus time and to provide control signals for other functions including closures and parachute deployment. The measurement task was a most difficult one since predictions of dust cloud densities showed a dynamic range of approximately 10^4 in mass. Since this type of dynamic range is beyond the state-of-the art for most electronic systems, a tapered collection chamber was devised. The tapered collection chamber, filling from the apex, provides a linearizing effect, i.e., a little initial volume provides the same capacitance change as a larger delta volume added onto an existing volume of dust. The use of the tapered collection chamber reduces the required dynamic range of the electronic system down to approximately 10^2 , well within the current state-of-the-art, permitting good comparative assessment of the total accumulated mass. A total accumulated mass of 0.05 grams could be measured. The capacitance sensor was of the parallel plate type and was part of an A.C. bridge circuit. The rectified output of the circuit was fed to a voltage controlled oscillator. This frequency modulated signal was fed directly into a micro-cassette tape recorder (Pearlorder Model S301) for recovery and playback later.

The timing electronics consisted of an electronically controlled time-delay relay. Time delays provided by the relay were adjustable from a few seconds to over two minutes. Selection of the proper time settings for functions were determined from practice drops of actual canisters in the field. A typical sequence of events for the canister electronics is as follows:

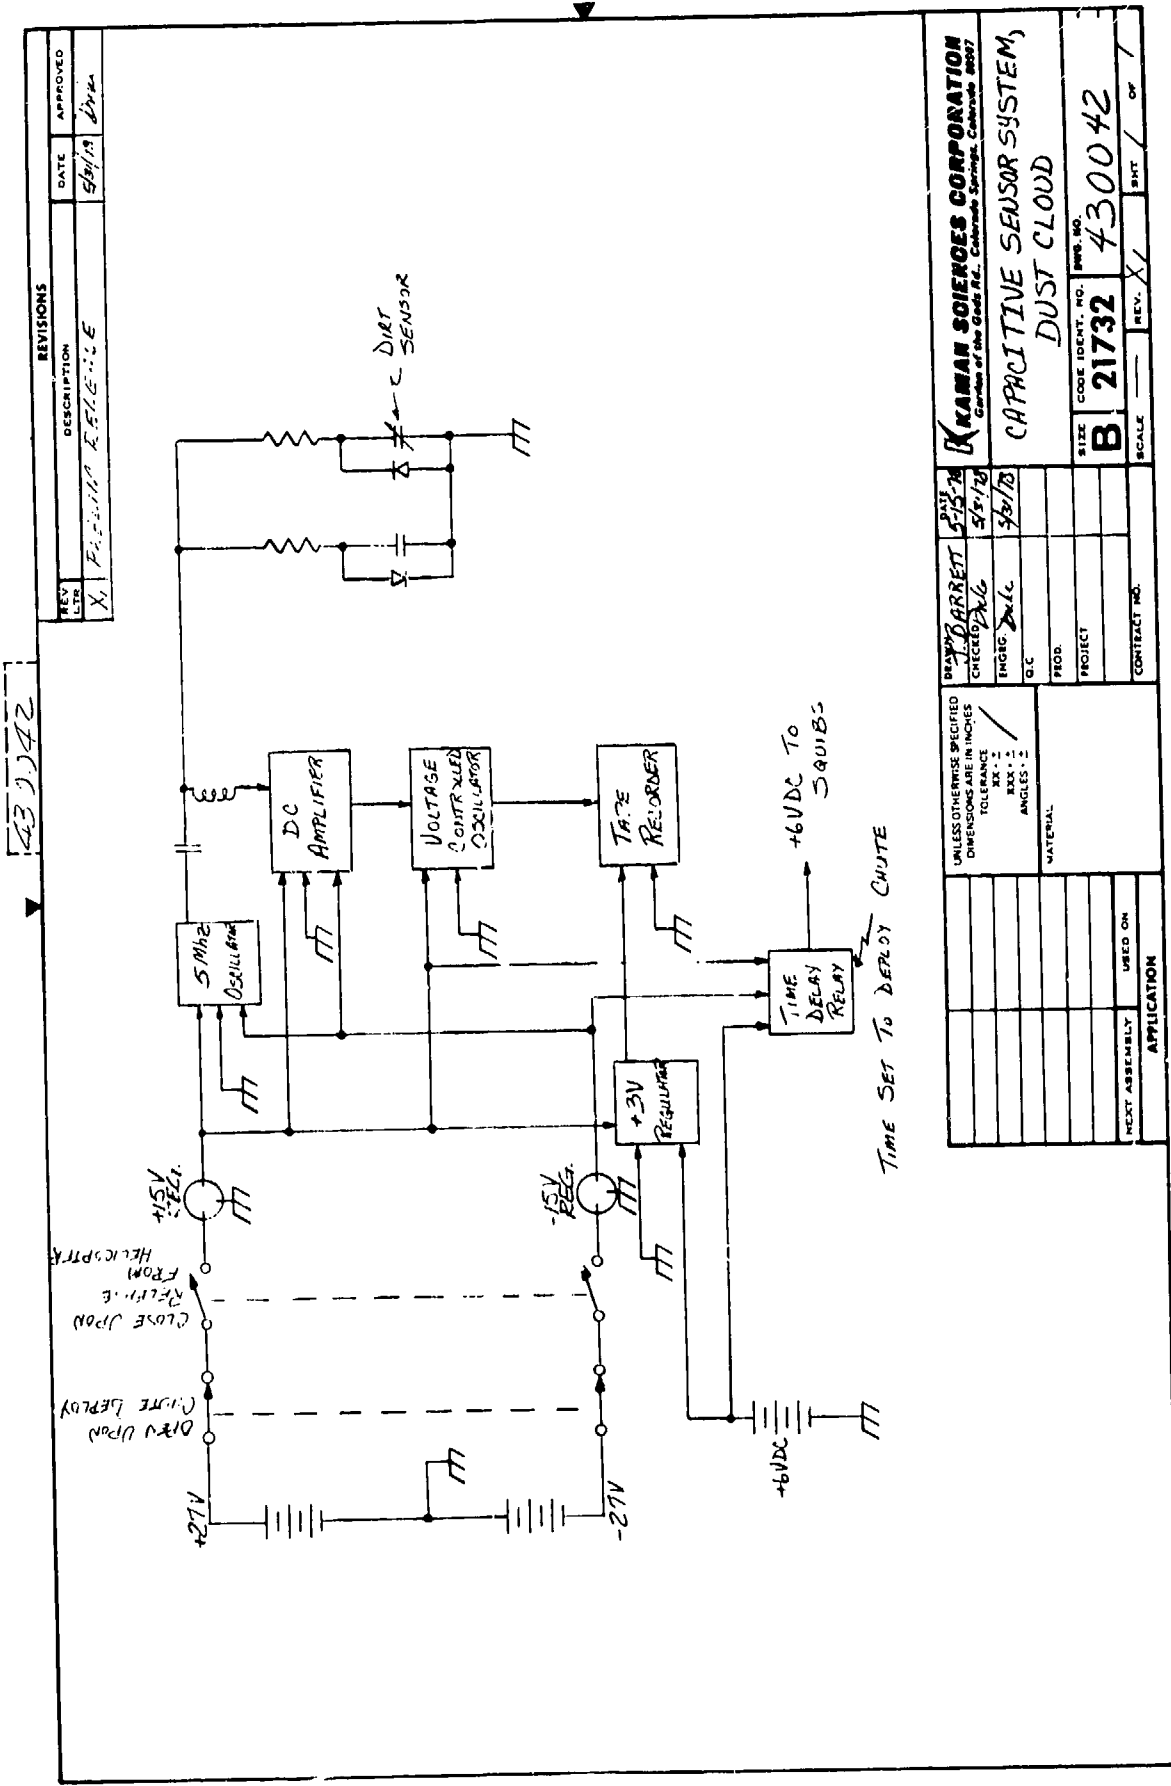


Figure 4. Electrical Block Diagram

Time zero - Turn on electronics (helicopter lanyard).
Capacitance sensor ready for measurements.

Time t - At a set time interval (approximately 30 seconds for the MISERS BLUFF events), three explosive guillotines are fired. These release the parachute, close the inlet to the cyclone separator and close the collection chamber. The release of the parachute opens a switch that turns off all power to the electronics and tape recorder.

3.5 Delivery System Design

The goals of the delivery system were to design and implement a system for accurately dropping several measuring canisters through the dust cloud. The basic approach was to use a helicopter, with canisters mounted on the sides for release at the proper time. The principle details of the system are shown in Figure 5. Actual photographs of the delivery system are shown in Figures 6 and 7. In this scenario the helicopter would approach the drop area in a near hover and when properly stationed above the ground target as indicated via an optical sighting mechanism, the canisters would be released (see Figure 8).

Participation in MISERS BLUFF using a manned helicopter flying above the burst raised a question concerning safety. Specifically, it was necessary to choose a flight altitude such that the aircraft would not be subjected to an overpressure above the sure-safe level for that aircraft. In fact, realizing that the vehicle would be manned and that there were some uncertainties in predicting the blast field environment, it was reasonable

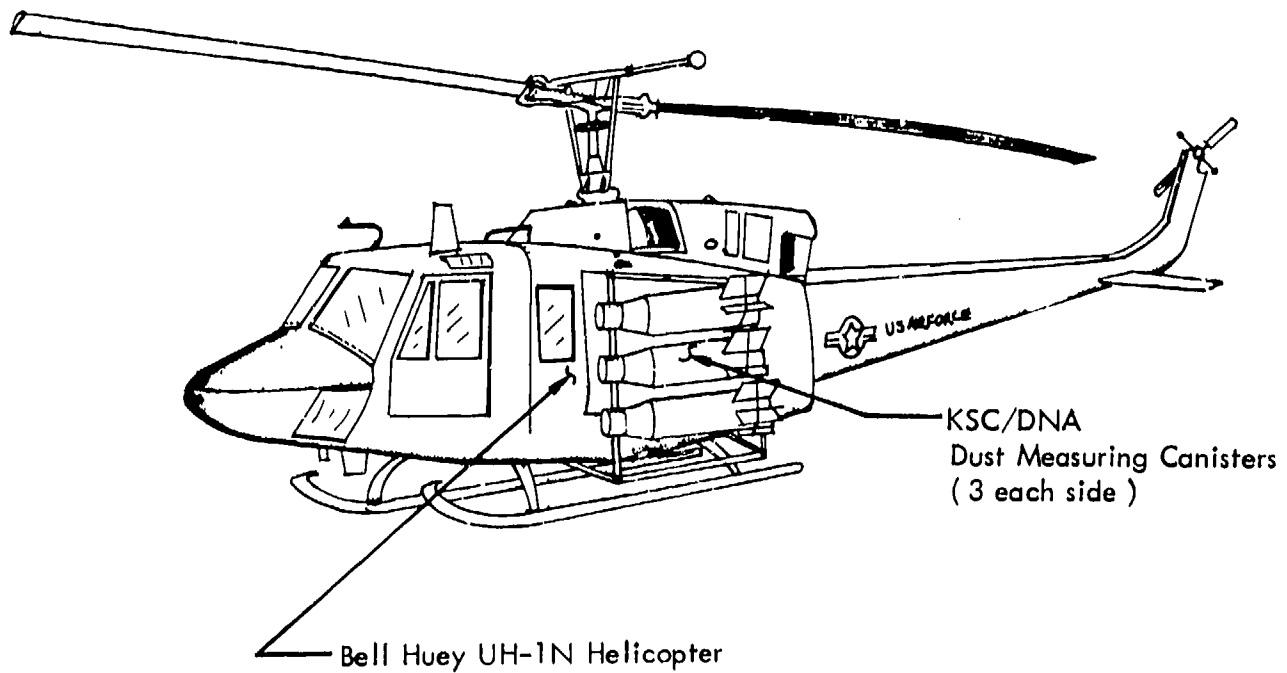


Figure 5. Helicopter Delivery System

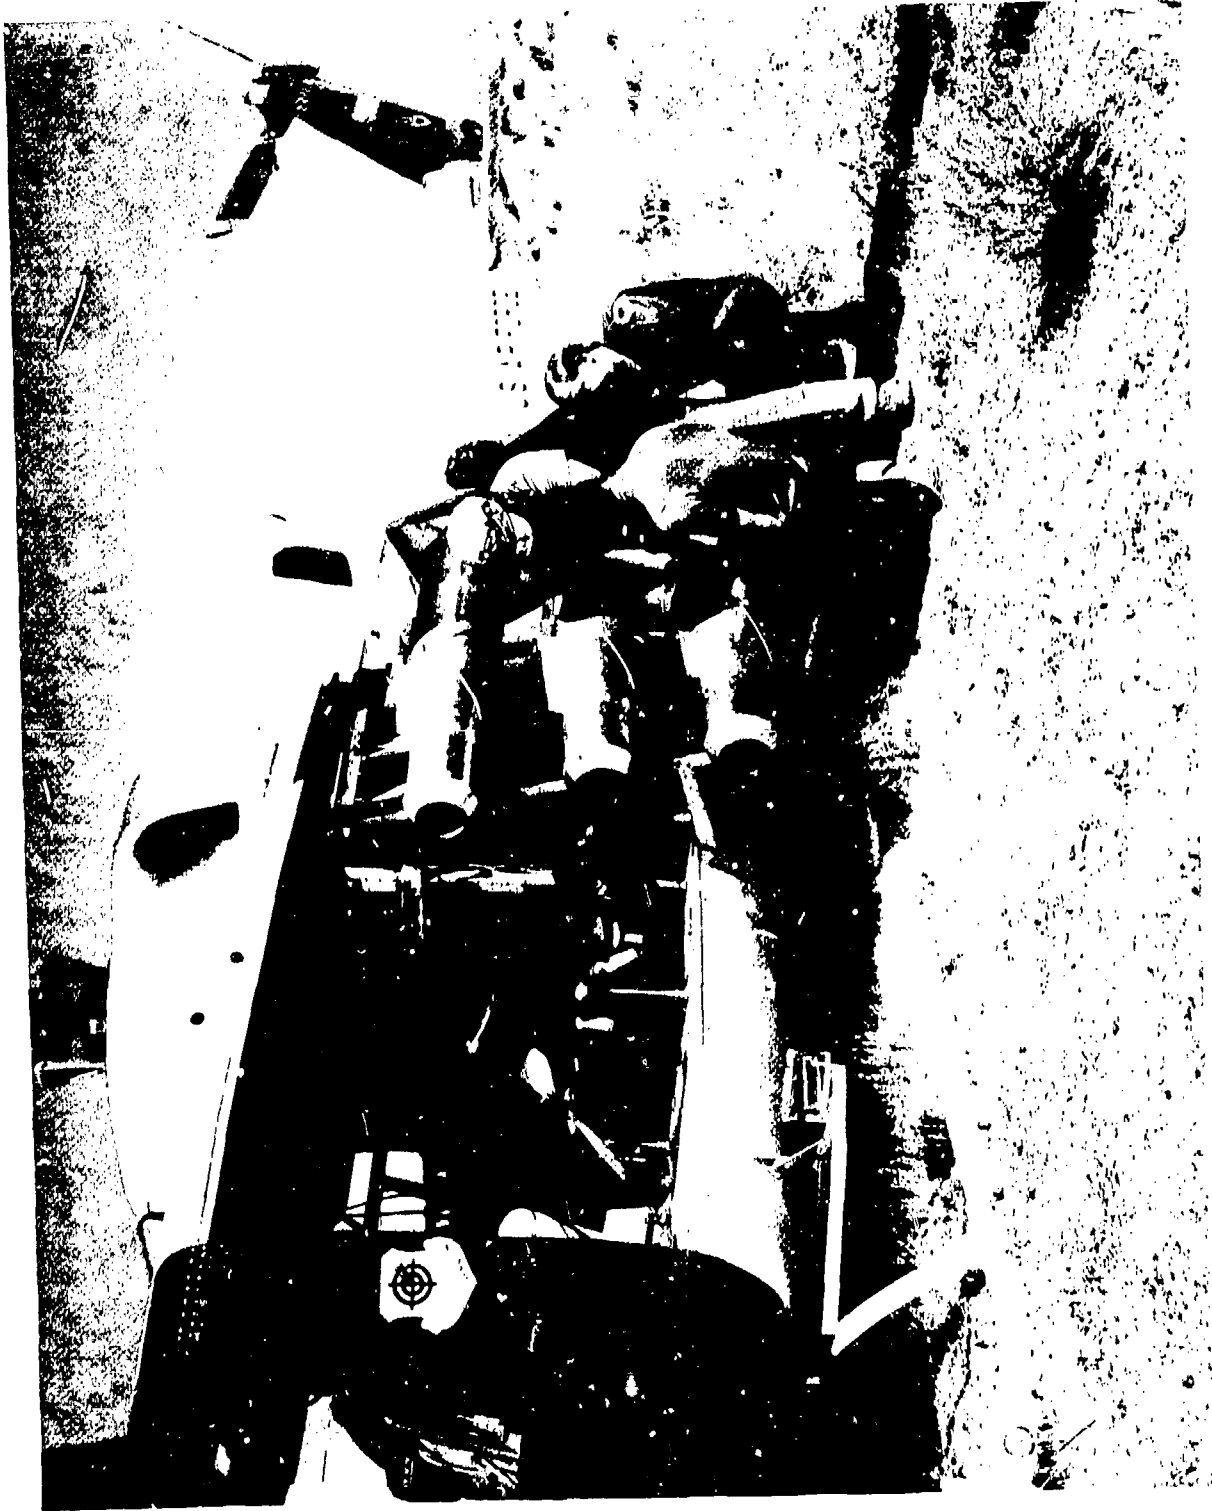


Figure 6. Loading of the canisters on the helicopter.

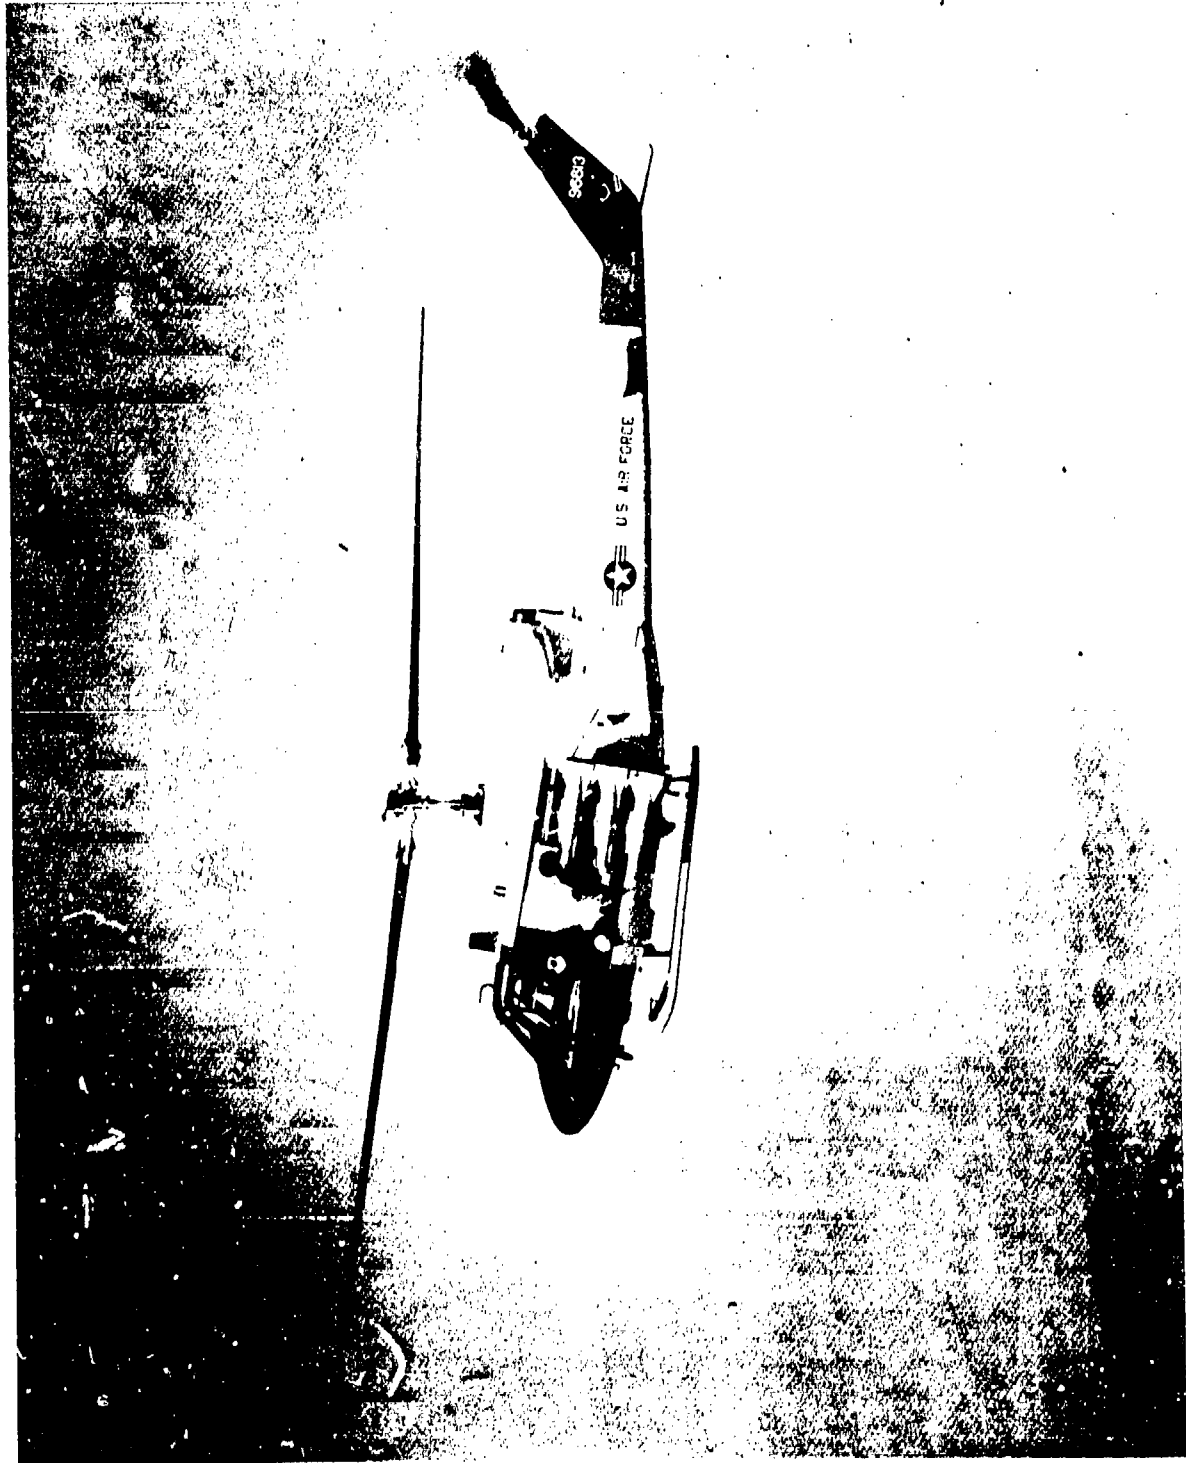


Figure 7. Loaded helicopter in flight.

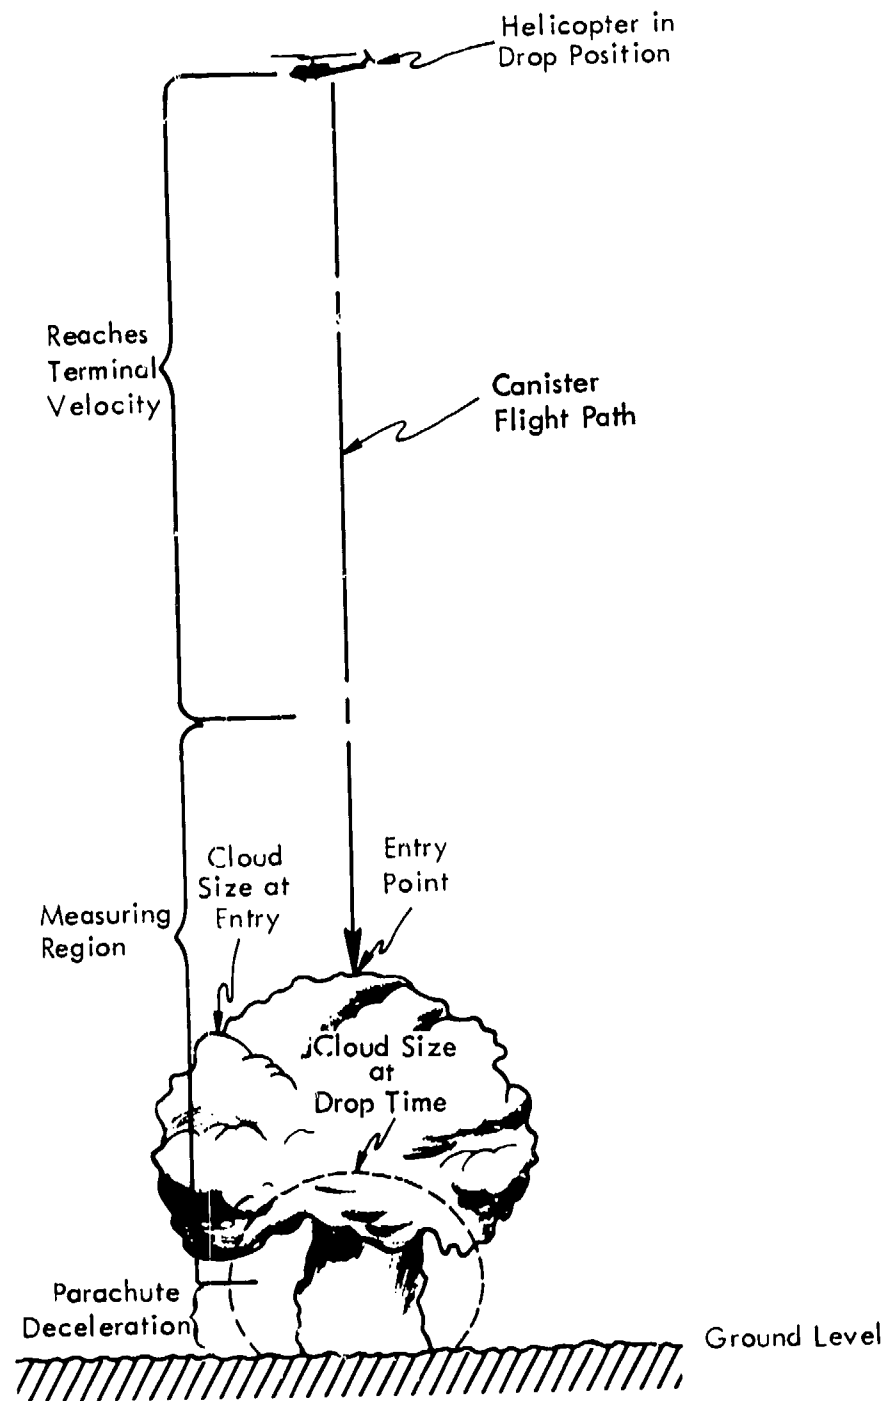


FIGURE 8. Dust Measuring Canister-System Diagram

to apply an additional safety factor of two beyond what was considered sure-safe to allow for blast overpressure prediction uncertainties.

Some data are available from tests conducted during the PRE-MINE, THROW-IV and DICE THROW Events. In these tests, a domed UH-1B helicopter received side-on blasts of 8963 Pa (1.3 psi) and 12411 Pa (1.8 psi) and the vehicle did sustain some damage, particularly at the higher level. It was concluded that for a blast directly on the side of a UH-1B, even the 8963 Pa (1.3 psi) level would be unacceptable. After some analysis and consultation with experts, it was estimated that for generic helicopters, the 1379 Pa (0.2 psi) overpressure level would provide adequate safety for all encounter conditions; including blasts from directly below (which load the main rotor blades).

For tests using large quantities of explosives, the 1379 Pa (0.2 psi) keep out zone requires the helicopter to fly at very high altitudes; e.g., the Event 2 mission was flown at 3936 meters (13,000 feet) above the blast site.

A detailed analysis of the response of a specific helicopter model in a simulated explosive burst is required if operations dictate closer positioning than about 1379 Pa (0.2 psi). Such a full analysis was not within the scope of KSC participation in MISERS BLUFF II Events and was not considered necessary because the predicted altitude corresponding to 1379 Pa (0.2 psi) was within the capability of the USAF helicopter employed. The KSC engineering judgement using safe-side environment and meteorological assumptions was documented in a memorandum from KSC Avidyne to KSC Science and Technology (see Appendix B).

Two additional problems with the delivery system selected were encountered. These were the problems of dropping the measuring canisters with the desired accuracy and the associated probability of impacting an experiment on the ground. The sighting mechanism evolved from simply a "seamans eye" through several mechanical devices of various degrees of sophistications. The final device selected consisted of a pendulum of clear lucite with crosshairs on the bottom and top. The pendulum was suspended in a clear, cylindrical container for elimination of wind loading and water filled to provide damping. The target point was indicated by aligning the upper and lower crosshairs. The sight indicated a path perpendicular to the drop surface. Through testing experience, it was found that inertial loads on the pendulum disk caused it to rock back and forth slightly. This motion, though small, had a significant effect on a target surface as great as 3936 meters (13,000) feet away, so a slow constant helicopter approach velocity was maintained to minimize this effect.

In the development stages, several test models and one actual canister were dropped as functional deployment and sighting experiments. The test models were of two types. The first was called a "free-fall dummy" and contained no electronics. It was the same size, shape, and weight as an actual canister, but was used only to measure total elapsed time from the helicopter to the ground. The second type was called a "chute dummy" since it contained all the necessary electronics and hardware for the deployment and testing of the deceleration parachute to permit observation of impact survival. Free-fall dummy decent times and estimates of terminal velocities were used to set the interval timers on the chute dummies. A summary of the drop testing is listed in Table 2.

TABLE 2

DROP HISTORY

DATE	TEST MODEL NUMBER	DROP LOCATION	DROP HEIGHT METERS (FEET)	DROP POSITION		Remarks**
				R (METERS/ FEET)	θ (degrees) *	
15 June 78	Dummy 1	Meadow Lake Airport	2120 (7000)	908 (~3000)	155	Aerodynamically Unstable Used Sighting
17 July 78	Dummy 2	"	"	291(960)	297	"
"	Dummy Chute 3	"	"	303(1000)	55	"
20 July 78	Dummy Chute 4	"	"	73(240)	70	New Sighting Mechanism
"	Dummy Chute 5	"	"	218(720)	324	"
30 July 78	Dummy Chute 6	Butte, Montana	"	45(150)	330	"
"	Dump 1	"	"	73(240)	0	"
25 Aug 78	Dummy 7	Area 14, NTS	2543(8400)	338(1115)	220	New Helicopter Crew
"	Dummy Chute 8	"	"	109(361)	180	"
"	Dummy Chute 9	"	"	358(1181)	300	"
"	Dummy Chute 10	"	"	~696 (~2300)	120	"
"	Dummy Chute 11	"	"	99(328)	210	"
"	Dummy Chute 12	"	"	159(525)	135	"
27 Aug 78	Dummy 13	Bill Wms Ck, Ariz	3936(13000)	277(918)	330	"

*Clockwise angular progression with 0° at magnetic North

**Test models 1 thru Dump 1 were dropped using the Hiller-Saloy helicopter.
All others were with the USAF UH-IN helicopter.

The problem of impact with other experiments was also studied by KSC for both Events 1 and 2. A circular error probability (CEP) was established using this limited data base. A CEP of 200 meters was estimated from all test drop data. Using that accuracy and considering the testbed layout for Event 2 probabilities of impact of various experiments are shown in Figures 9 through 13. In these figures, the radial angle, distance and size of each experiment is noted and a probability of impact versus CEP is shown. As indicated, probabilities of one in a million or less were predicted for nearly all experiments on the ground.

For Event 1, a similar analysis was performed, but the analysis was further complicated by a larger number of experiments on the ground and the consideration of aim-point bias. The use of aim-point bias was considered to decrease the probability of impact for certain sensitive experiments.

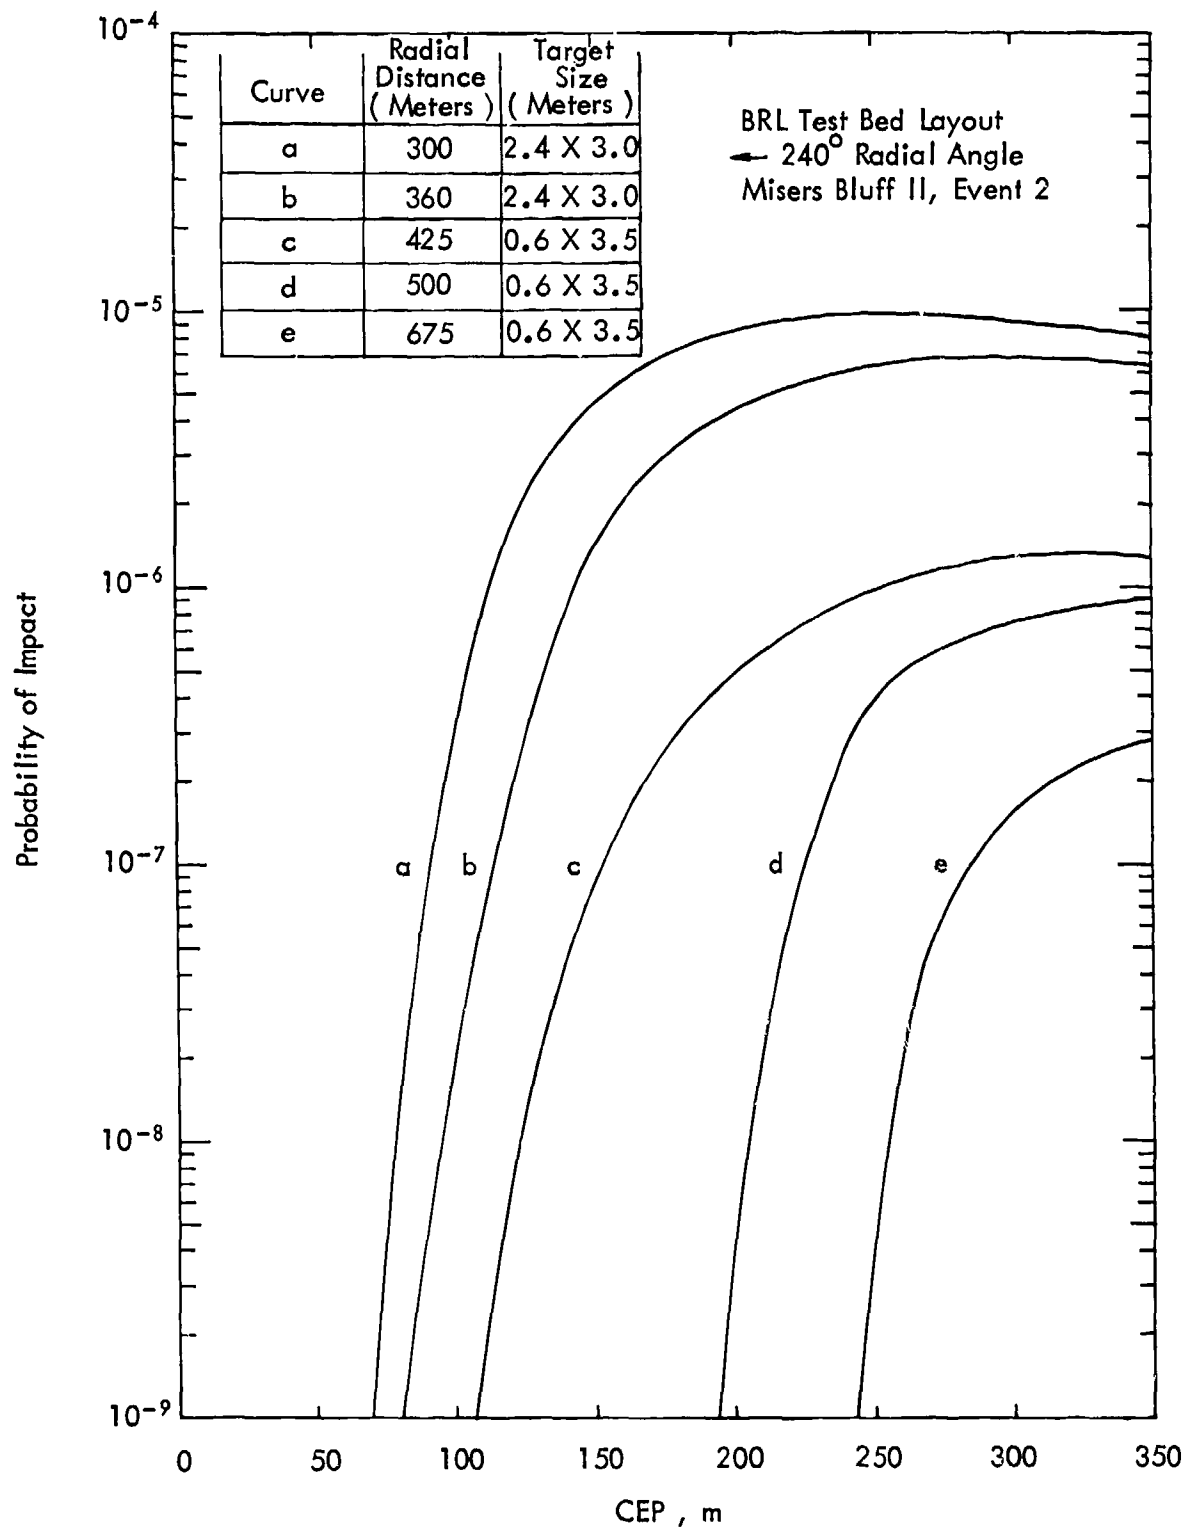


Figure 9. Probability of Impact Versus Canister CEP, BRL Experiments

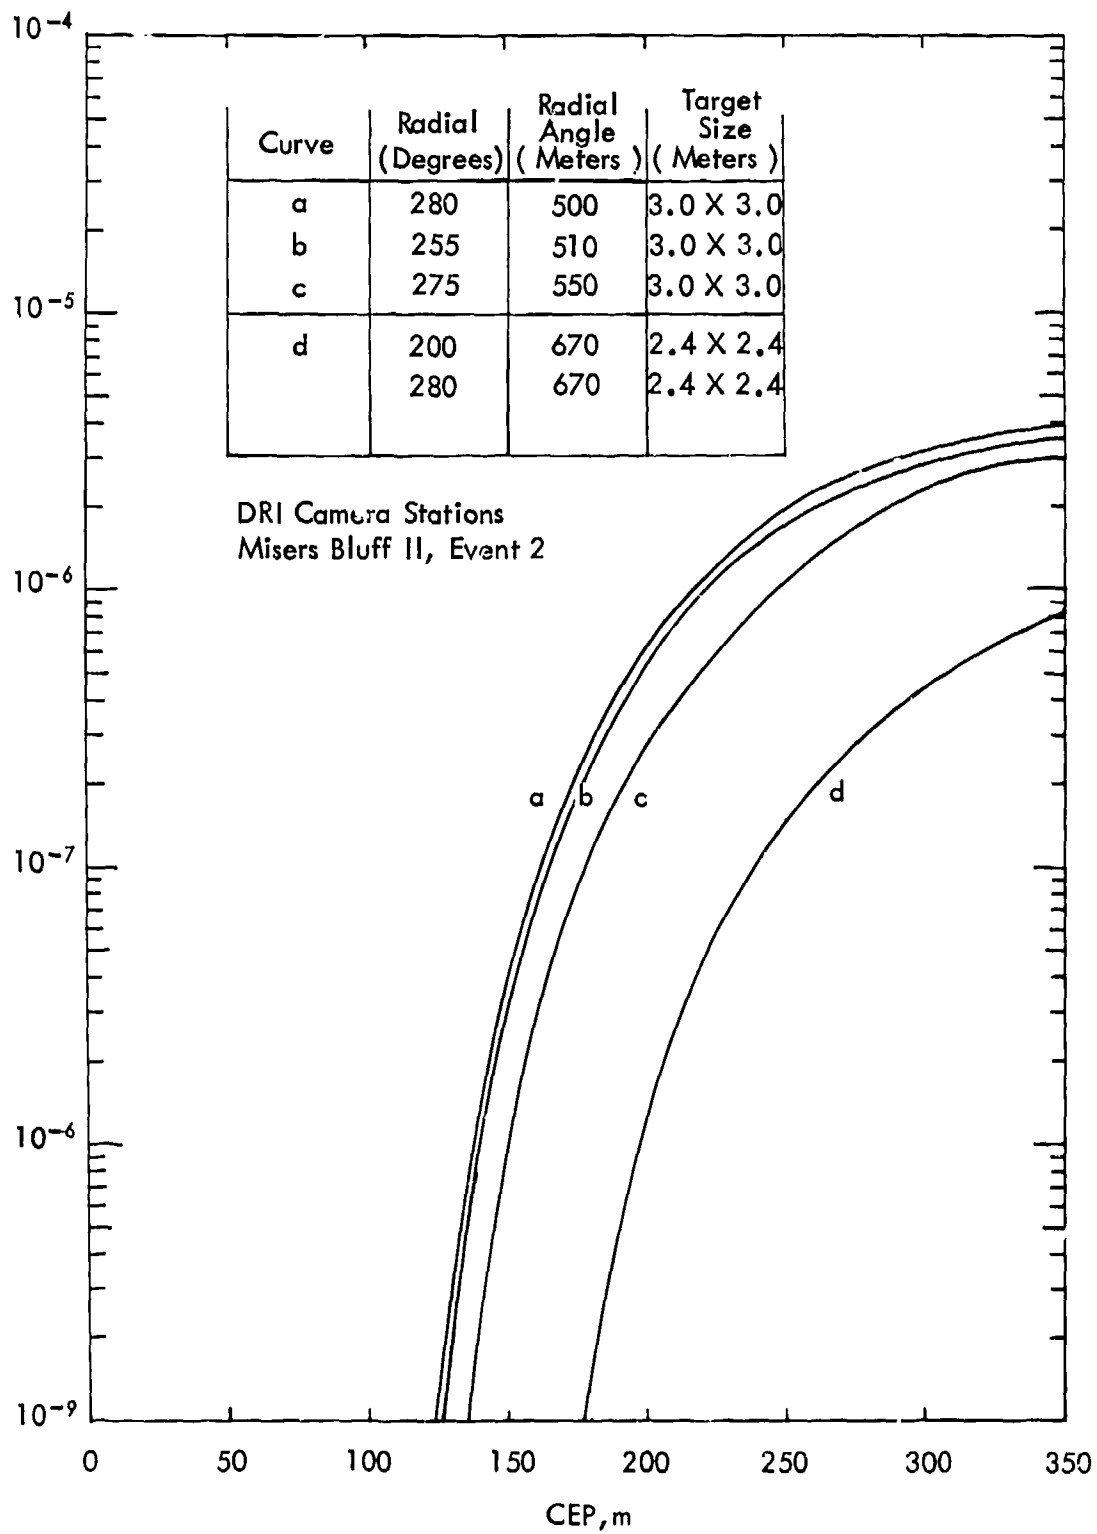


Figure 10. Probability of Impact Versus Canister CEP, DRI Camera Stations

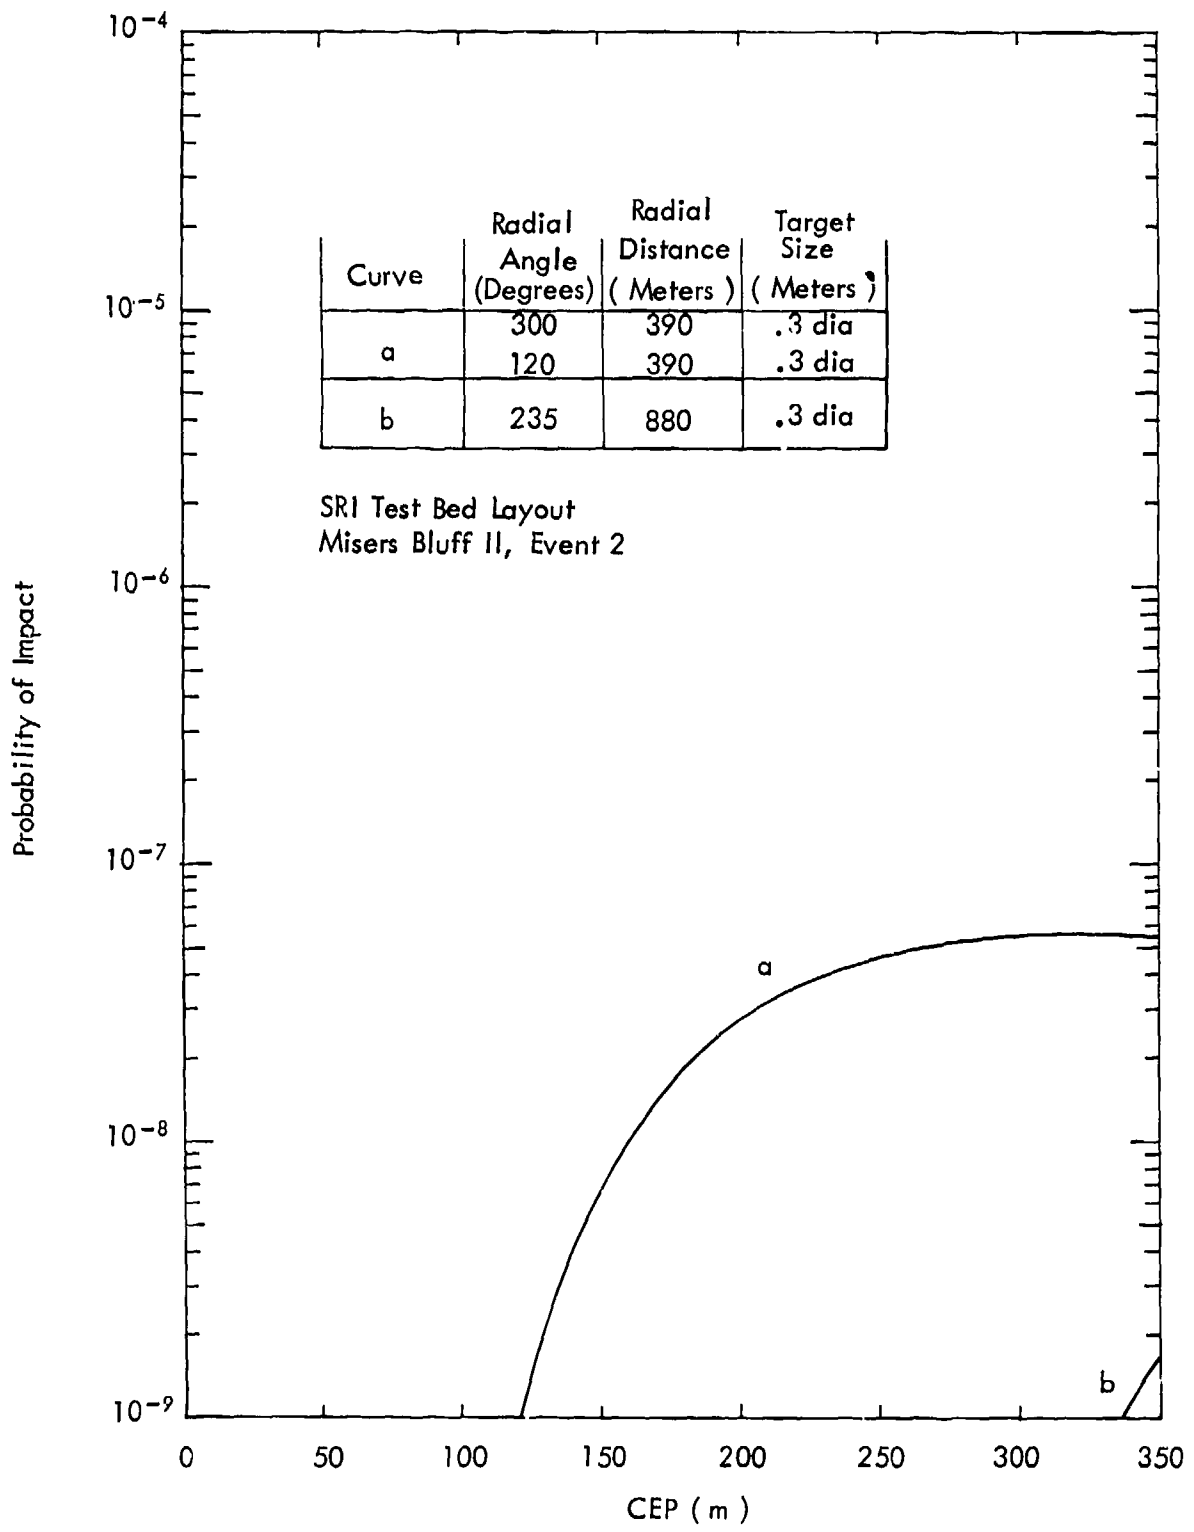


Figure 11. Probability of Impact Versus Canister CEP, SRI Experiments

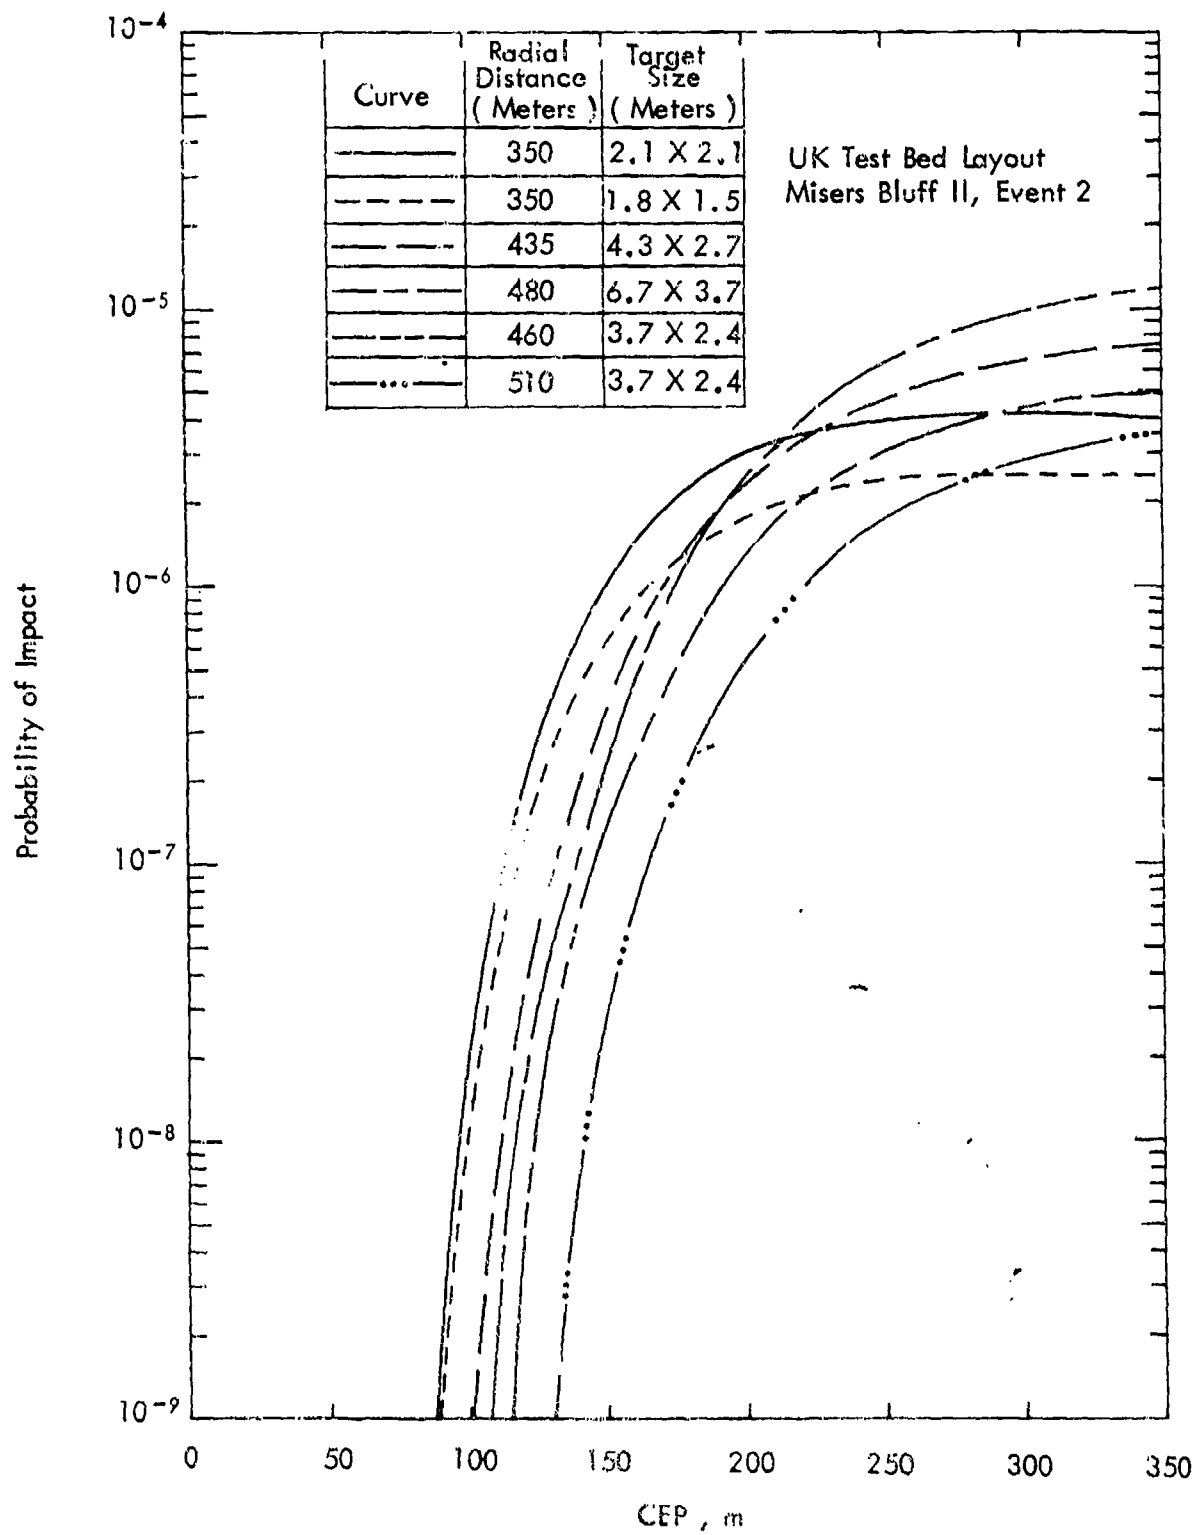


Figure 12. Probability of Impact Versus Canister CEP, UK Experiments

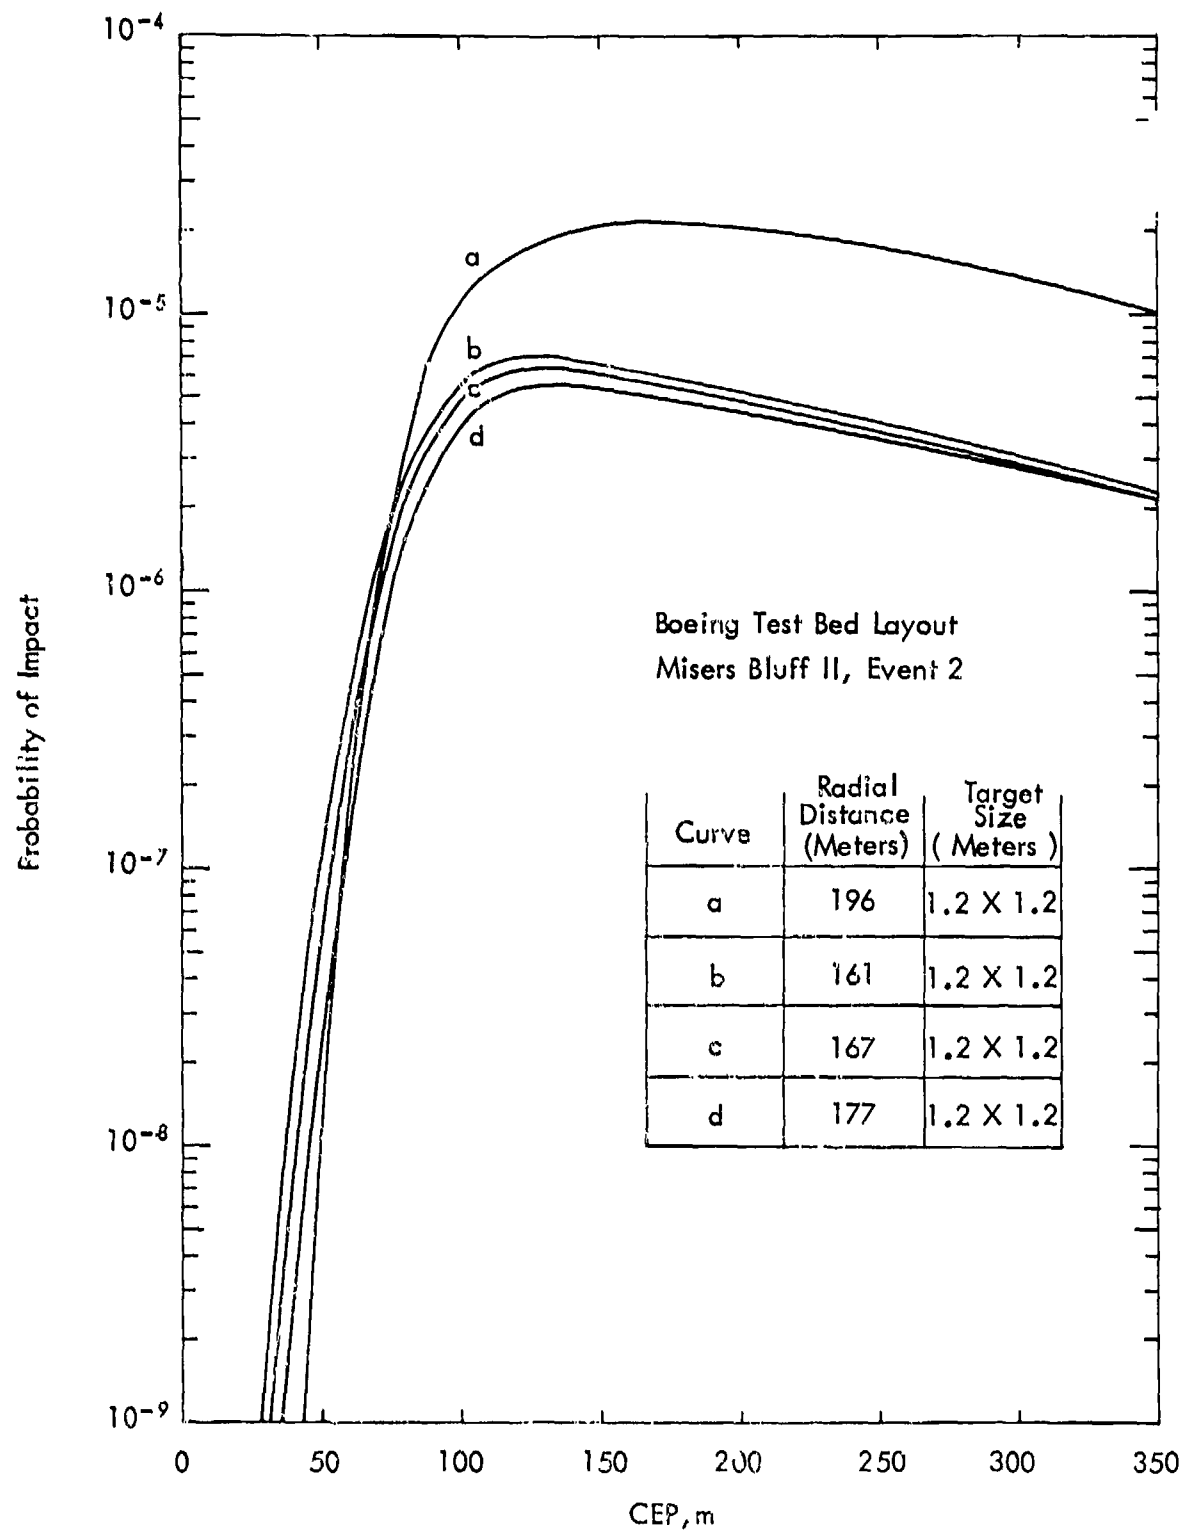


Figure 13. Probability of Impact Versus Canister CEP, Boeing Experiments

SECTION 4 CONCLUSIONS

In this intensive development program, virtually all the design goals of the program were met and many design firsts were achieved. A mass measuring canister was designed that actively measured and passively collected accumulated dust as it traversed a dust cloud. Also, a unique helicopter delivery system including portage and sighting mechanisms was designed, fabricated, and tested. This dust collector system made possible early time (< 2 minutes) dust cloud mass measurements.

No measurements were made in either Event 1 or Event 2 of the MISERS BLUFF II test series. Aerodynamic design problems and concern for ground impact accuracy led to the cancellation of Event 1. In Event 2, a countdown delay at 15 minutes prior to detonation required all airborne aircraft to return to their base of operations. When the countdown was resumed, the helicopter was not able to re-establish the delivery sequence in the remaining time and was north of the desired position when Event 2 was detonated. Six canisters were dropped in hopes of penetrating the northern edge of the dust cloud, but a field inspection of the units showed no dust had been collected. A real field demonstration of the canister measuring system was made in Butte, Montana on 30 July 1978, where dust that was held in the canister inlet by tissue paper was collected from the airstream, actively measured and protected during impact. This test clearly demonstrated the feasibility of both the delivery and measurement system.

Other notable successes of the program included the design and testing of the unique aerodynamic design, mechanical construction, electrical design, measurements schemes, and

delivery techniques. Each of these design efforts indicated the strengths and limitations of many of the system concepts which will be invaluable in future improvement efforts.

SECTION 5
RECOMMENDATIONS

As a result of this development program, a unique dust cloud mass measuring system was conceived and tested. The test experiences yielded a variety of information concerning the advantages and disadvantages of each design aspect. After considering this data and future program needs, it is recommended that refinements include the following:

Canister System

1. Active measurements Additional measurement capability should be added to further define accumulated mass versus altitude and particle size. The consideration of 1) compartments or bins that change with time 2) the capacitance measurement technique and 3) further study of the acoustic sensor (which should give data on particle size), should be pursued. In addition to the new measurement techniques, the effect of moisture content on the measurement should also be assessed.

2. Collection techniques The passive sample collection concept should be further refined to eliminate impact of the particles on the collector chamber walls. With the cyclone separator, an excessive amount of interaction of the particle with the wall occurs with a probable break up of the larger particles. A system involving particle separation by turning the high velocity flow suggested. Such a scheme, would have some design effect

on the capacitance measurement of the accumulated mass, but may permit a smaller sized canister.

3. Parachute system The pre-impact release of a deceleration parachute should be eliminated. Experience has shown that problems of deployment timer accuracy and drop time increment determinations as it pertains to real altitude would be eliminated if the canister could survive a high velocity impact. In addition to this, the canister could measure dust particles all the way to the ground which would increase its scientific effectiveness.

Observations of canister impacts indicate that if a more durable front end is provided with a crushable outer cylinder the canister could survive impacts of up to 122 meters per second (400 feet per second). Additional design problems resulting from such a change include the closure of the collection chamber both front and aft prior to impact. An impact triggered closure mechanism is suggested as one design approach.

Having eliminated the timer and practice drop problems, variable drag schemes are also suggested which would provide preprogrammed different descent and cloud penetration times with simple design modifications.

4. Electronic tracking and impact identification
An electronic signal identification and impact notification scheme is suggested. With such a system, an electronic signal would be transmitted after the canister is released. This signal would allow the canister to be tracked to and identified on the ground. Advantages of such a technique would be in providing additional penetration position data and ground location data.

Delivery System

1. General If the helicopter delivery system is to be continued, some refinements are necessary. They should include improvements to sighting, time-sequenced approach positioning, actuating lanyard design and communications; however, it is suggested that alternate delivery systems be considered especially if the collection technique results yield a much smaller canister. With a smaller canister, delivery schemes such as a mortar or howitzer powder gun, balloon or rocket motor could be considered. Such delivery systems eliminate the need of active personnel in aircraft above the explosive detonation.
2. Sighting and time-position A computer assisted ground based deployment scheme is suggested. An electronic tracking signal would be used to determine the exact position of the helicopter and would continually advise the aircraft of headings and airspeeds required to reach the


drop-zone at the proper time. Preliminary investigations of the helicopter positioning system have indicated that optical techniques are not well suited and electronic tracking systems should be used.


3. Communication using a two channel FM system is needed. Such a system would allow private communications (essential to (2) preceding) with a high degree of reliability. Such systems are in use with Army ground-to-air communications with helicopters and could easily be implemented.
4. A simple, lanyard system to initiate the electronics and smoke flare is recommended. The pull-line must be designed so that it would not interfere with other canisters, the helicopter blades, or engine intakes.

APPENDIX A

The following drawings are the engineering definition of the dust cloud mass measuring canister. All dimensions noted are in inches and degrees as is current engineering practice at Kaman Sciences Corporation. The reader is referred to the beginning of the report for conversion of these units to SI metric values.

PRECEDING PAGE BLANK-NOT FILMED

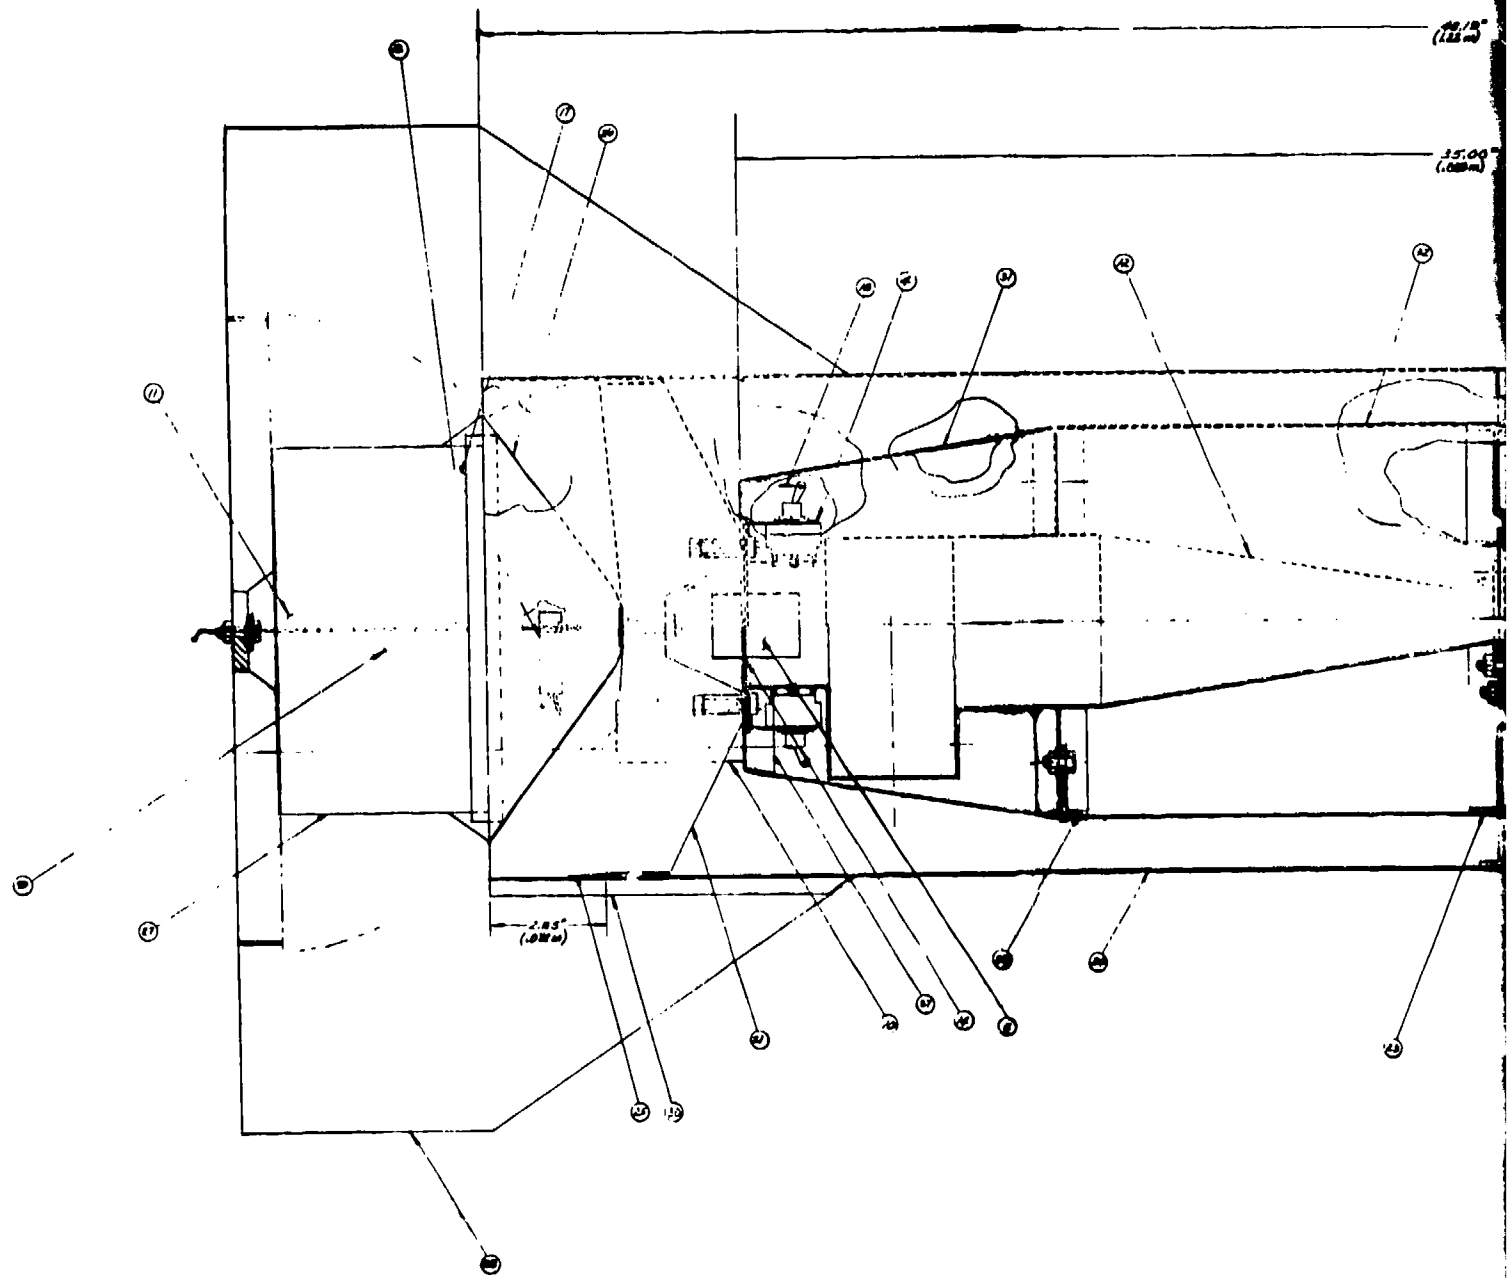

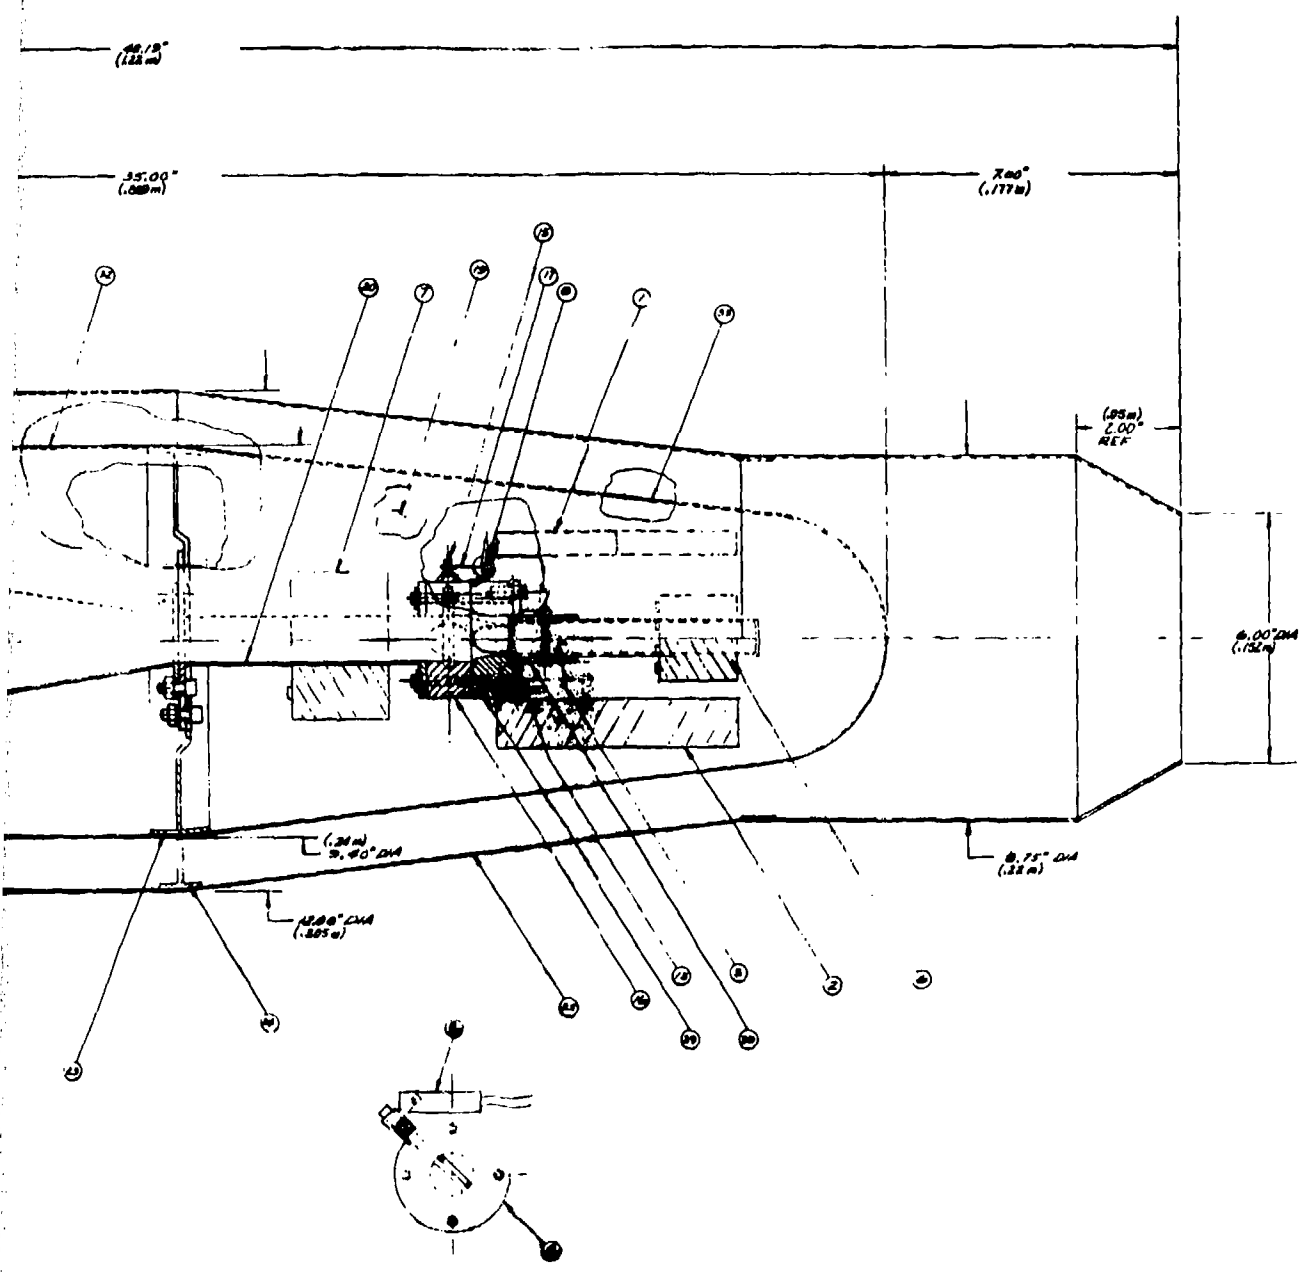

ASSEMBLY DRAWING 450314

2

1 SHEET OF 7 REV. X1 DRAWING NUMBER PL450315

NOTES
SEE SHT 7

MODEL

DRAWING MATERIAL & PARTS LIST

KAMAN SCIENCES CORPORATION
1500 Garden of the Gods Road, Colorado Springs, Colorado

CODE IDENT. NO.	TITLE	ITEM NO.	CAT	DRAWING NUMBER													DESCRIPTION	QUANTITY		
				1	2	3	4	5	6	7	8	9	10	11	12	13			14	15
21732	MEASURING SYSTEM, DUST CLOUD																	ASSY DWG	001 002 003	
		X		4	5	0	3	1	5	-	0	0	0					SCHEMATIC	REF REF REF	
		X		4	3	0	0	4	2										" " -	
		X		4	5	0	3	1	5	-	0	0	1					SYSTEM ASSY-ACTUAL	X	
		X		4	5	0	3	1	5	-	0	0	2					SYSTEM ASSY-PARACHUTE DUMMY	X	
		X		4	5	0	3	1	5	-	0	0	3					SYSTEM ASSY-FREE FALL DUMMY		X
		I																ELECTRONICS, SIG. COND	2	2
A		2		S	3	0	1										RECORDER	1	-	
B		3																SENSOR ASSY. (CAP)	1	-
C		4																SWITCH, START-STOP	2	1
D		5		1	2	0	-	2	4	-	X	2	-	E	1			RELAY, DELAY, R12 TYPE	1	1
E		6																PWR SUPPLY	1	1
F		7																POWER SUPPLY	1	1
G		8		2	8	0	1										GUILLOTINE	3	1	
H		9																PARACHUTE-8 FOOT	1	1
H		10																FLARE, MHT, 60 Sec.	1	1
H		11																FLARE, MHT 60 Sec		
J		12		X	Q	-	3										CYCLONE	1	-	

SHEET OF 7 REV. X1 DRAWING NUMBER PL450315



KAMAN SCIENCES CORPORATION
1500 Garden of the Gods Road, Colorado Springs, Colorado

DRAWING MATERIAL PARTS LIST

2 SHEET OF 7 REV. X1 DRAWING NUMBER PL450315

CODE IDENT. NO.
21732

TITLE
MEASURING SYSTEM, DUST CLOUD

NOTES

ITEM NO.	CAT	DRAWING NUMBER														DESCRIPTION	QUANTITY
		1	2	3	4	5	6	7	8	9	10	11	12	13	14		
13																FILTER	1
14																CLOSURE LEVER	1
15																CLOSURE ASSY	1
16																WIRE, TRIGGER	A/R A/PA/R
17																LANYARD SWITCH ACTUATING	A/R A/PA/R
18																FOAM, CASTABLE	A/R/R A/R
19																CHAMBER, SETTLING	1
20																RIB, AFT	1
21	4	10	24	5												RIB, MID	1
22	4	10	24	6												RIB, FWD	1
23	4	10	25	0												SPACER	3
24																CLOSURE, STOP	4
25																FLEXIBLE CLOSURE	1
26	4	10	24	8	-0	0	1									HOUSING, PARACHUTE	1
27	4	50	31	8	-0	0	1									STABILIZING-FIN ASSY	1
28	4	0	31	6	-0	0	0									GUIDE, STABILIZING FIN ASSY	8
29																SKIN, AFT, INSTR. POD	1
30																	
31	4	1	0	24	9	-0	0	4									8

SHEET 3 OF 7 | REV. XI | DRAWING NUMBER PL450315

DRAWING MATERIAL PARTS LIST

KAMAN SCIENCES CORPORATION
1500 Garden of the Gods Road, Colorado Springs, Colorado

CODE IDENT. NO. 21732

TITLE
MEASURING SYSTEM, DUST CLOUD

NOTES

DESCRIPTION

DRAWING NUMBER

CAT

ITEM NO.

NOTES

QUANTITY

SKIN, MD INSTR, POD

4 1 0 2 4 9 - 0 0 3

32

1

001 002 003

NOSECONE, INSTR. POD

4 1 0 2 4 9 - 0 0 1 & - 0 0 2

33

1

1

SHROUD, OUTER-AFT

4 5 0 3 1 7 - 0 0 1 & - 0 0 2

34

1

1

SHROUD, OUTER, MID

4 1 0 2 5 3 - 0 0 1

35

1

1

FLANGE, CYCLONE MTG.

4 1 0 2 4 7

36

1

1

SHROUD, OUTER, INLET

4 1 0 2 5 2 - 0 0 1

37

1

1

001

002

003



KAMAN SCIENCES CORPORATION
1500 Garden of the Gods Road, Colorado Springs, Colorado

CODE IDENT. NO.

21732

TITLE

MEASURING SYSTEM DUST CLOUD

DRAWING MATERIAL PARTS LIST

4 SHEET OF 7 REV. XI DRAWING NUMBER PL450315

NOTES

ITEM NO.	CAT	DRAWING NUMBER														QUANTITY		
		1	2	3	4	5	6	7	8	9	10	11	12	13	14		15	
																	001 002003	
																	174-20UNC ALLEN SOCKET HEAD CAP SCREW X 3" LONG	6 6
																	1/8 x 3/8 POP RIVET	20 20
																	1/8 x 1/4 POP RIVET	100 100
																	3/16 x 7/16 POP RIVET	350 350
																	VACUUM VALVE CABLE VACUUM VALVE-NUPRD C7-304 24VEO	1 FT - 1 -
																	1/8 STEEL AIRCRAFT CABLE	3 3 3 FT
																	1/8 STEEL CABLE SLEEVES	2 2 2
																	1/8" STEEL CABLE CLAMPS	1 1 1
																	SMOKE FLARE BRACKET	1 1 1
																	2 1/2" DIA HOSE CLAMP	2 2 -
																	MYLAR WRAP	A/R -
																	ALUM FOIL WRAP	A/R -
																	POLY BAG	1 -
																	VACUUM VALVE SET SCREW-8-32 UNC X 1/8	2 -
																	TENSION SPRING - 8" LONG	1 -
																	TORSION SPRING (DOOR CLOSURE)	3 -
																	NEOPRENE RUBBER 1/8" THICK	A/R -
																	2" DIA. HOSE CLAMP	2 2 -



KAMAN SCIENCES CORPORATION
1500 Garden of the Gods Road, Colorado Springs, Colorado

CODE IDENT. NO. **21732**

DRAWING MATERIAL & PARTS LIST

TITLE
MEASURING SYSTEM, PJST CLOUD

SHEET 5 OF 7 REV. XI DRAWING NUMBER PL 450315

NOTES

ITEM NO.	CAT	DRAWING NUMBER															DESCRIPTION	QUANTITY
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15		
																	001 002 003	
																	A/R -	-
																	RUBBER CEMENT	
																	BATTERIES 1 1/2 V	5
																	BATTERIES 9V	6
																	CONNECTOR ARCHER	1
																	RTV-LEAD POTTING	A/R
																	1/4-20 UNC X 3/4 HEX HD CAP	12
																	SCREEN	12
																	1/4-20 UNC X 2 1/2" LONG ALLEN	-
																	SOCKET HEAD CAP SCREW VAC VALVE	4
																	CAL SWITCH ARCHER 275-326	1
																	EYEBOLT 3/8 - 16 x 2"	1
																	EYEBOLT WASHER 3/8" HOLE	1
																	EYEBOLT (SMALL) #10-32	1
																	EYEBOLT NUT #10-32	2
																	EYEBOLT LOCK WASHER	1
																	1/4-20 NUTS	22
																	1/4-20 LOCK NUTS	16
																	FISH LINE -25# TEST	5
																	1/8 NYLON CORD	20
																	1/4 NYLON CORD	3
																	5 MIN EPOXY	A/R

SHEET 5 OF 7 REV XI DRAWING NUMBER PL450315

SHEET 6 OF 7 REV. XI DRAWING NUMBER PL 450315

SHEET 6 OF 7 REV. XI DRAWING NUMBER PL450315

CODE IDENT NO.	TITLE	DRAWING MATERIAL PARTS LIST													DRAWING NUMBER	DESCRIPTION	QUANTITY		
		1	2	3	4	5	6	7	8	9	10	11	12	13				14	15
21732	MEASURING SYSTEM, DUST CLOUD																	SMOKE BOMBLET	1
																		SMOKE FLARE	A/R
																		LEAD	1
																		FENCE POST CAP	1
																		GUTTER NAIL	3
																		FIN	A/R
																		WIRE	A/R
																		5 MIN EPOXY	


NOTES

NEXT ASSY. MODEL

KAMAN SCIENCES CORPORATION
1500 Garden of the Gods Road Colorado Springs, Colo-805


SHEET 7 OF 7 REV. LXI DRAWING NUMBER PL 450315

SHEET 7 OF 7 REV. LXI DRAWING NUMBER PL450315

 KAMAM SCIENCES CORPORATION <small>1422 US Ave. at the Gods Road Colorado Springs Colorado</small>	DRAWING MATERIAL & PARTS LIST		NOTES
	CODE IDENT NO. 21732	TITLE MEASURING SYSTEM, DUST CLOUD	

NOTE:

- A BELL SYSTEMS INC. 716 NO. WEBER COLORADO SPRINGS, CO 80903
- B
- C POTTER-BROMFIELD
- D
- E
- F HOLEX INC. 2751 SAN JUAN ROAD HOLLISTER CALIF. 95023
- G LADY-MAC CORSETCO BUFFALO, N.Y.
- H SUPERIOR SIGNAL CO. INC. WEST GREYSTONE ROAD, SPOTSWOOD, N.J. 08884
- I
- J FISHER-KLOSTERMAN, INC. 2901 MAGAZINE ST., LOUISVILLE, KY 40211

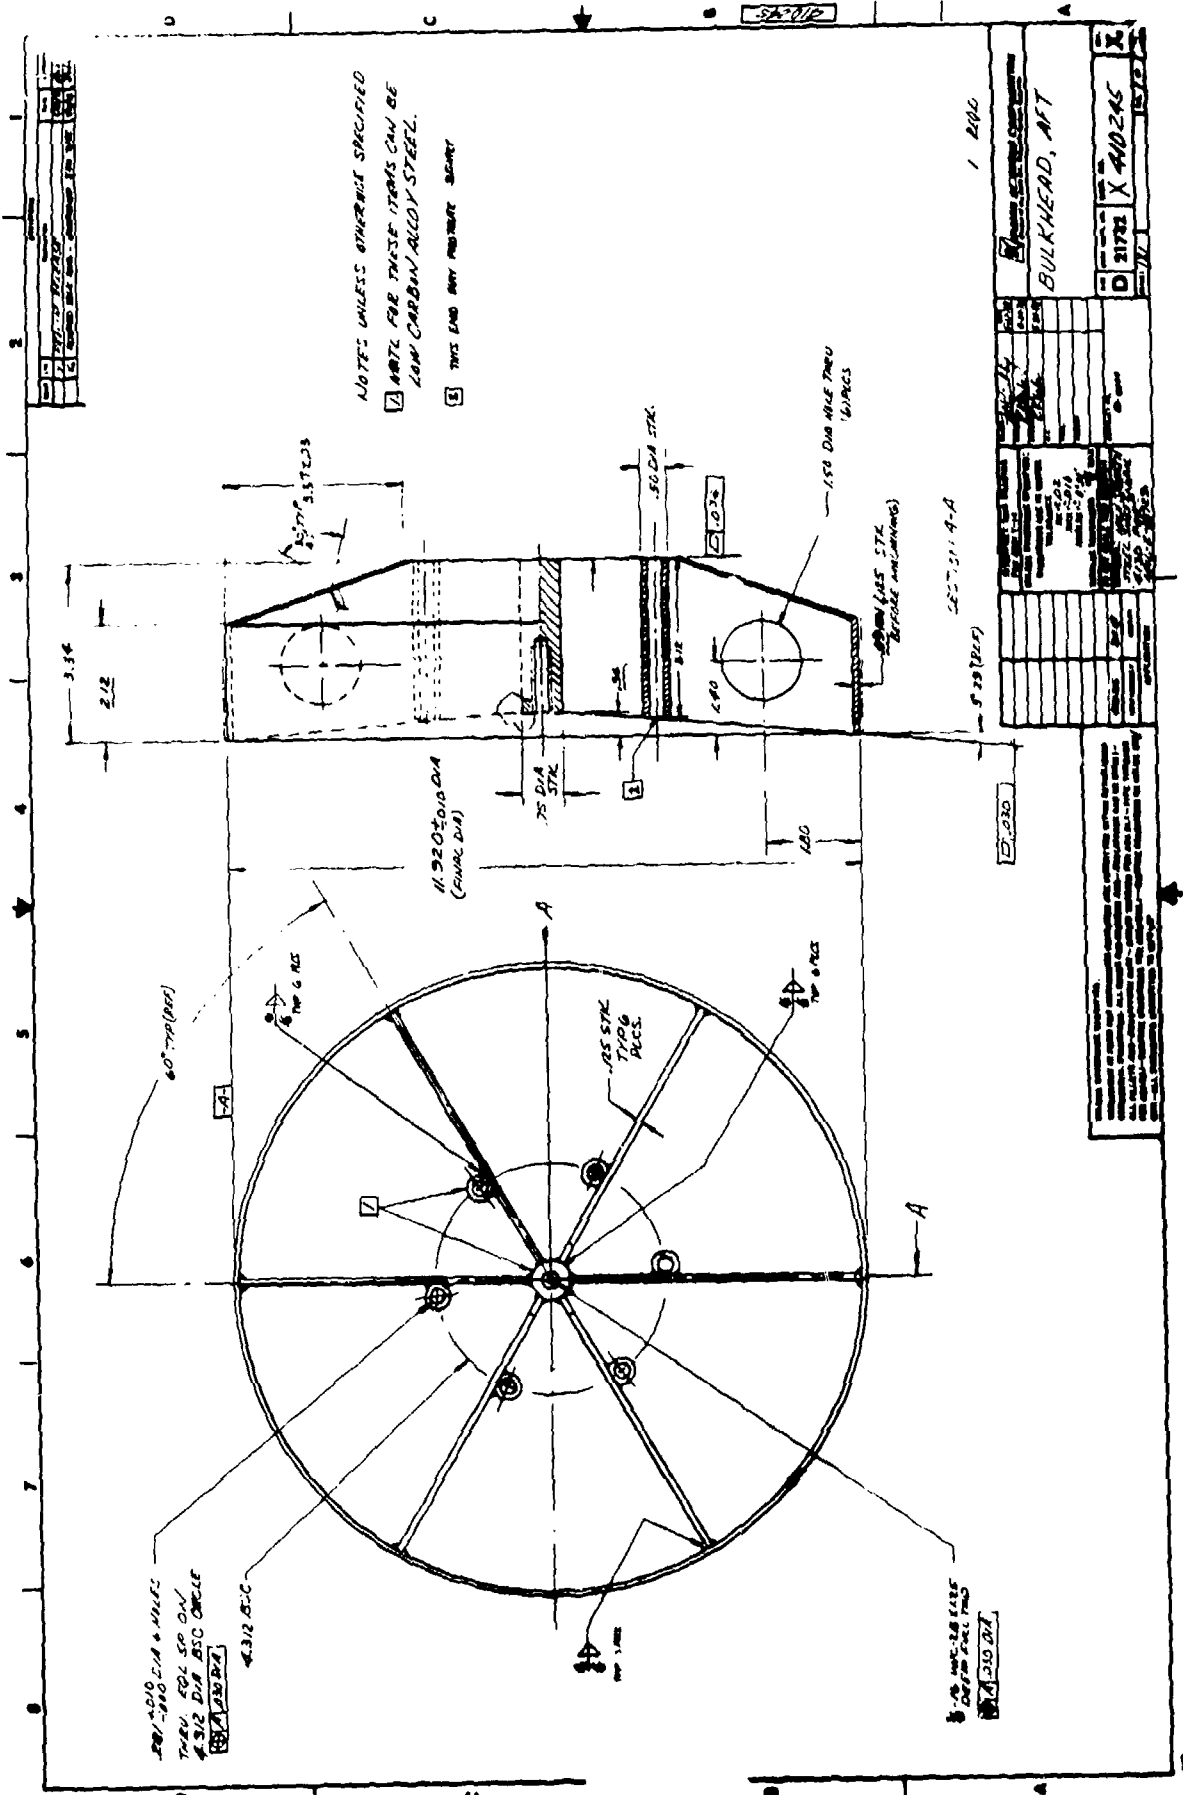



REV	DATE	BY	CHK
1			

NOTES UNLESS OTHERWISE SPECIFIED
 [Z] ALL STEEL PARTS FOR THESE ITEMS CAN BE LOW CARBON ALLOY STEEL.
 [E] THIS END ONLY REQUIRE BARNEY

BULKHEAD, AFT			
D	REV	X	410245

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS SHALL BE TO THE UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS SHALL BE TO THE UNLESS OTHERWISE SPECIFIED

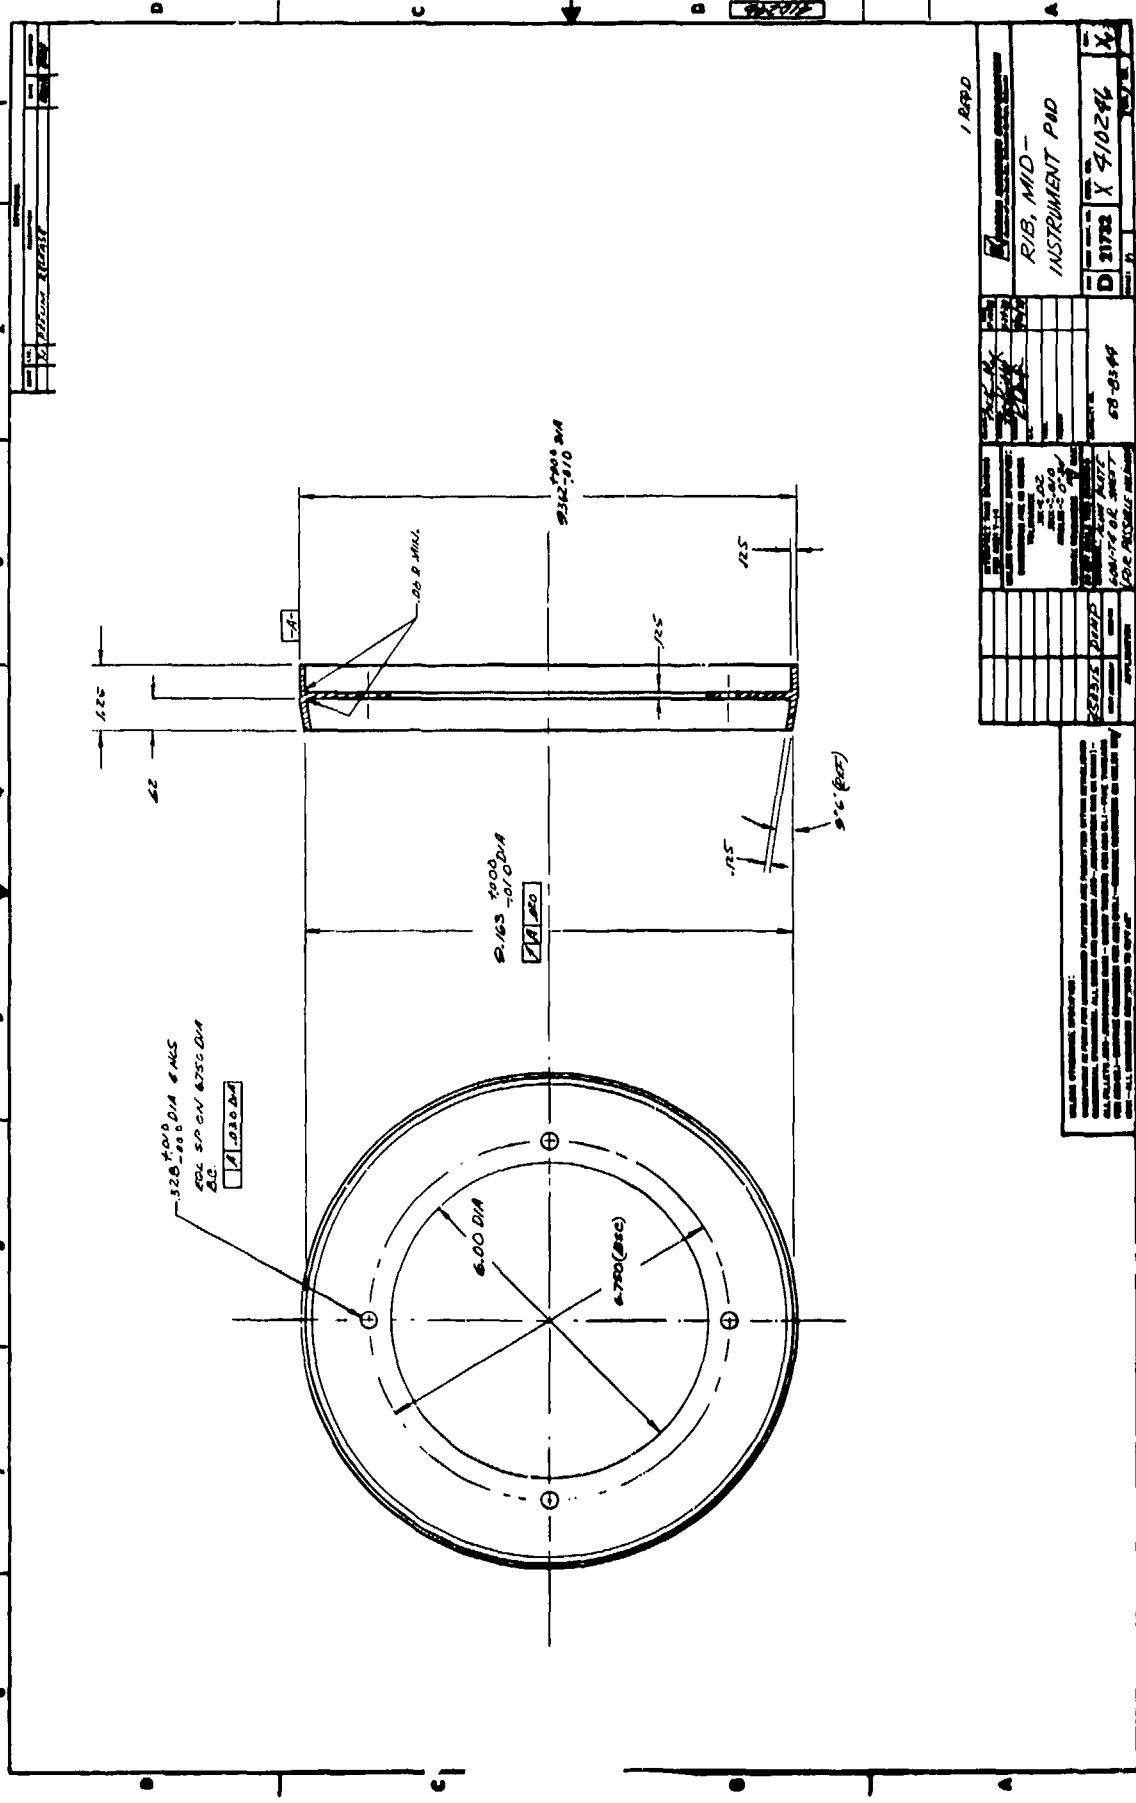

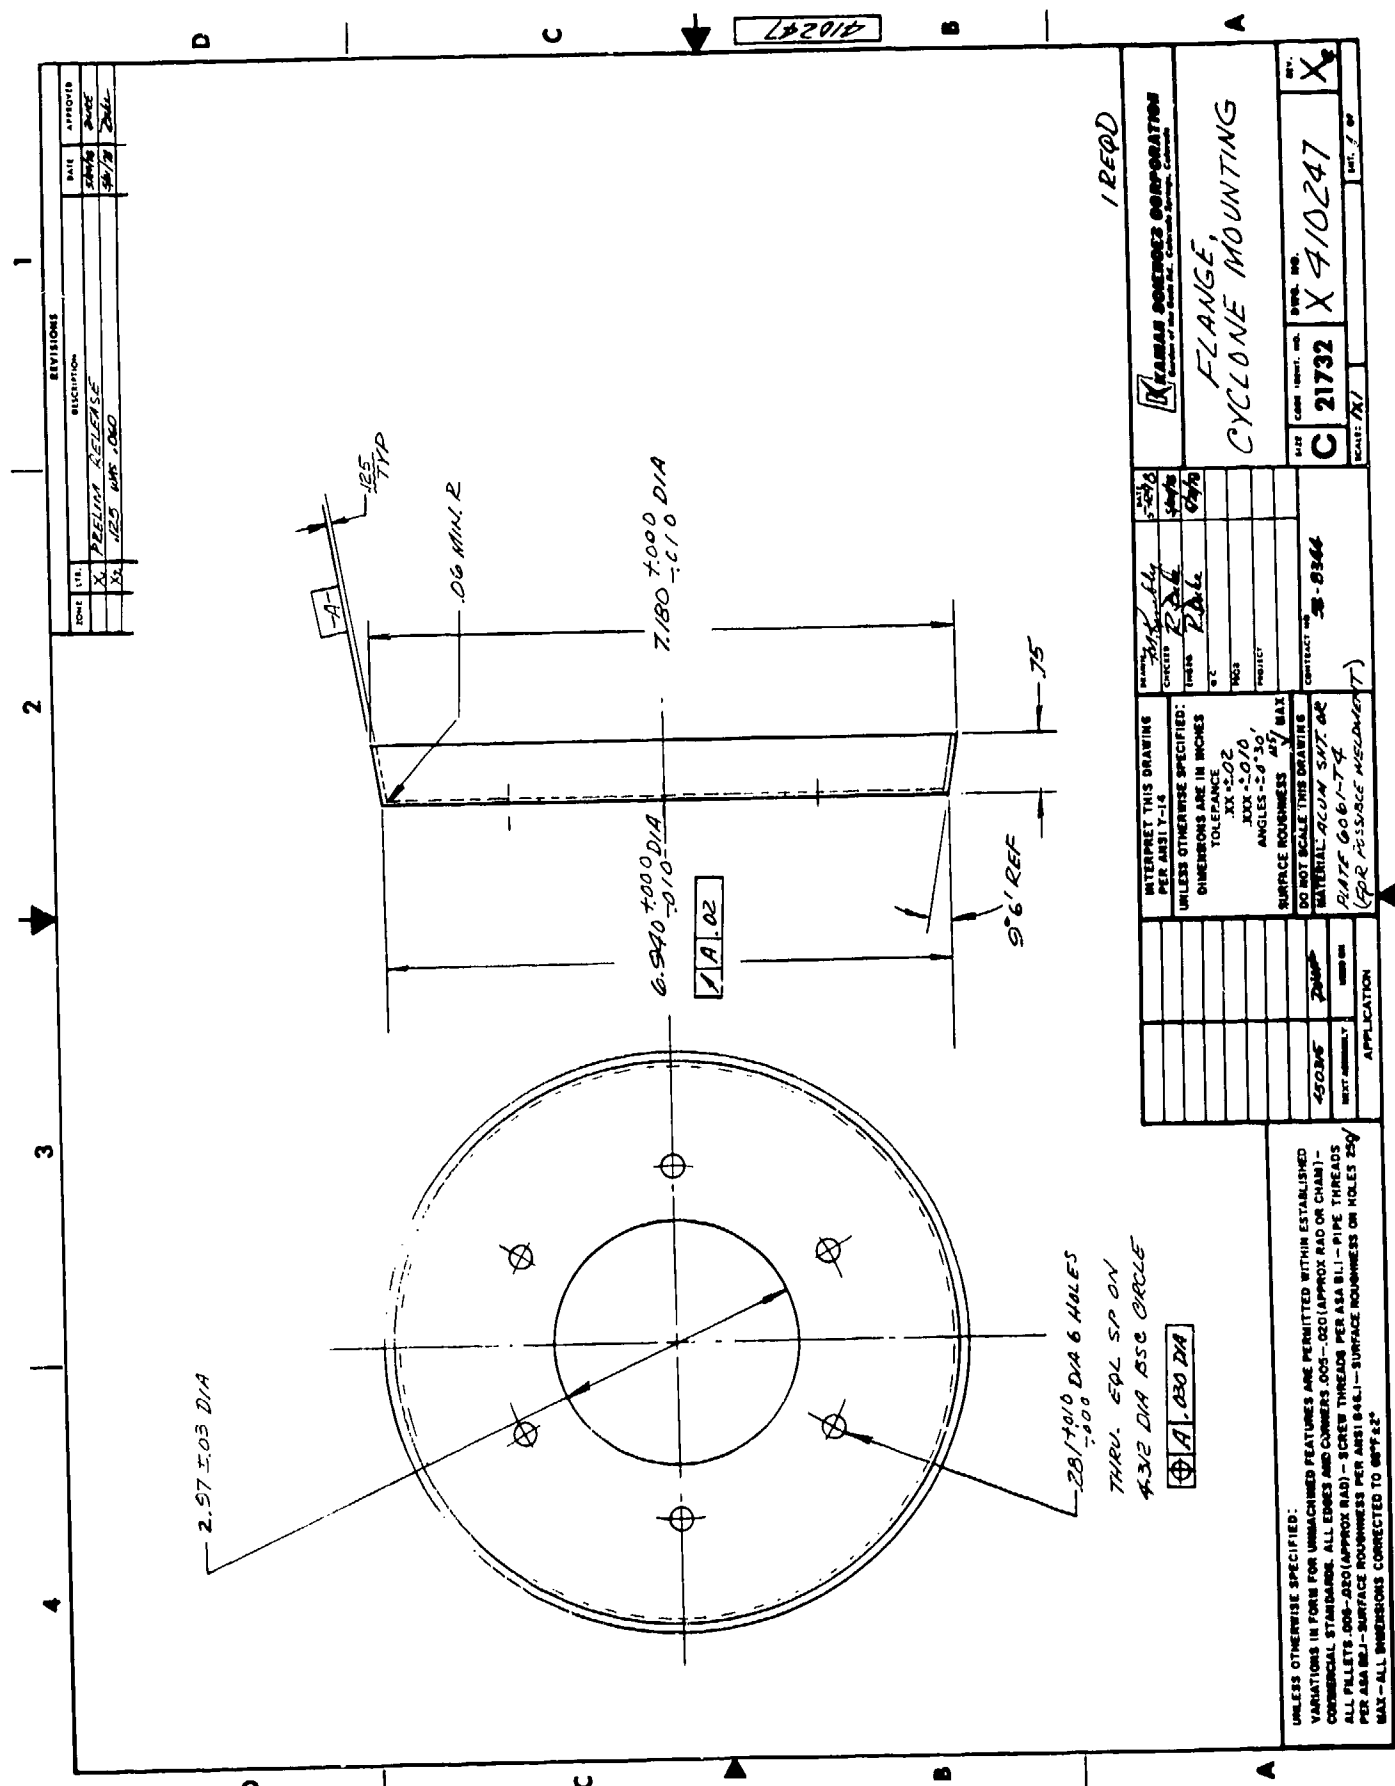

REVISIONS		DATE	APPROVED
NO.	DESCRIPTION		
1	PRELIM RELEASE	3/1/78	SMC
2	125 WPS 1080	3/1/78	SMC


1 REQD

KAMAR SCIENTIFIC CORPORATION
 FLANGE, CYCLONE MOUNTING

SIZE	CAGE	UNIT	QTY	DATE
C	21732	X	410247	
SCALE:	1:1			


INTERPRET THIS DRAWING PER ANSI 1-14 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCE XX ± 0.02 XXX ± 0.01 ANGLES ± 0.5° SURFACE ROUGHNESS N/BX DO NOT SCALE THIS DRAWING MATERIAL: ALUMN 547.02 DATE 6061-74 (FOR FESSUSE ASSEMBLY)	DESIGNER: P.D.L.	CHECKER: P.D.L.	DATE: 3-1-78	CONTRACT NO: 3-8344
--	------------------	-----------------	--------------	---------------------

UNLESS OTHERWISE SPECIFIED: VARIATIONS IN FORM FOR UNMACHINED FEATURES ARE PERMITTED WITHIN ESTABLISHED COMMERCIAL STANDARDS. ALL EDGES AND CORNERS .005-.010 (APPROX RAD OR CHAM) - ALL FILLETS .005-.010 (APPROX RAD) - 9 DEGREE THREADS PER ASA B1.1 - PIPE THREADS PER ASA B1.1 - SURFACE ROUGHNESS PER ANSI B46.1 - SURFACE ROUGHNESS ON HOLES 250 MAX - ALL DIMENSIONS CORRECTED TO 68°F ± 2°

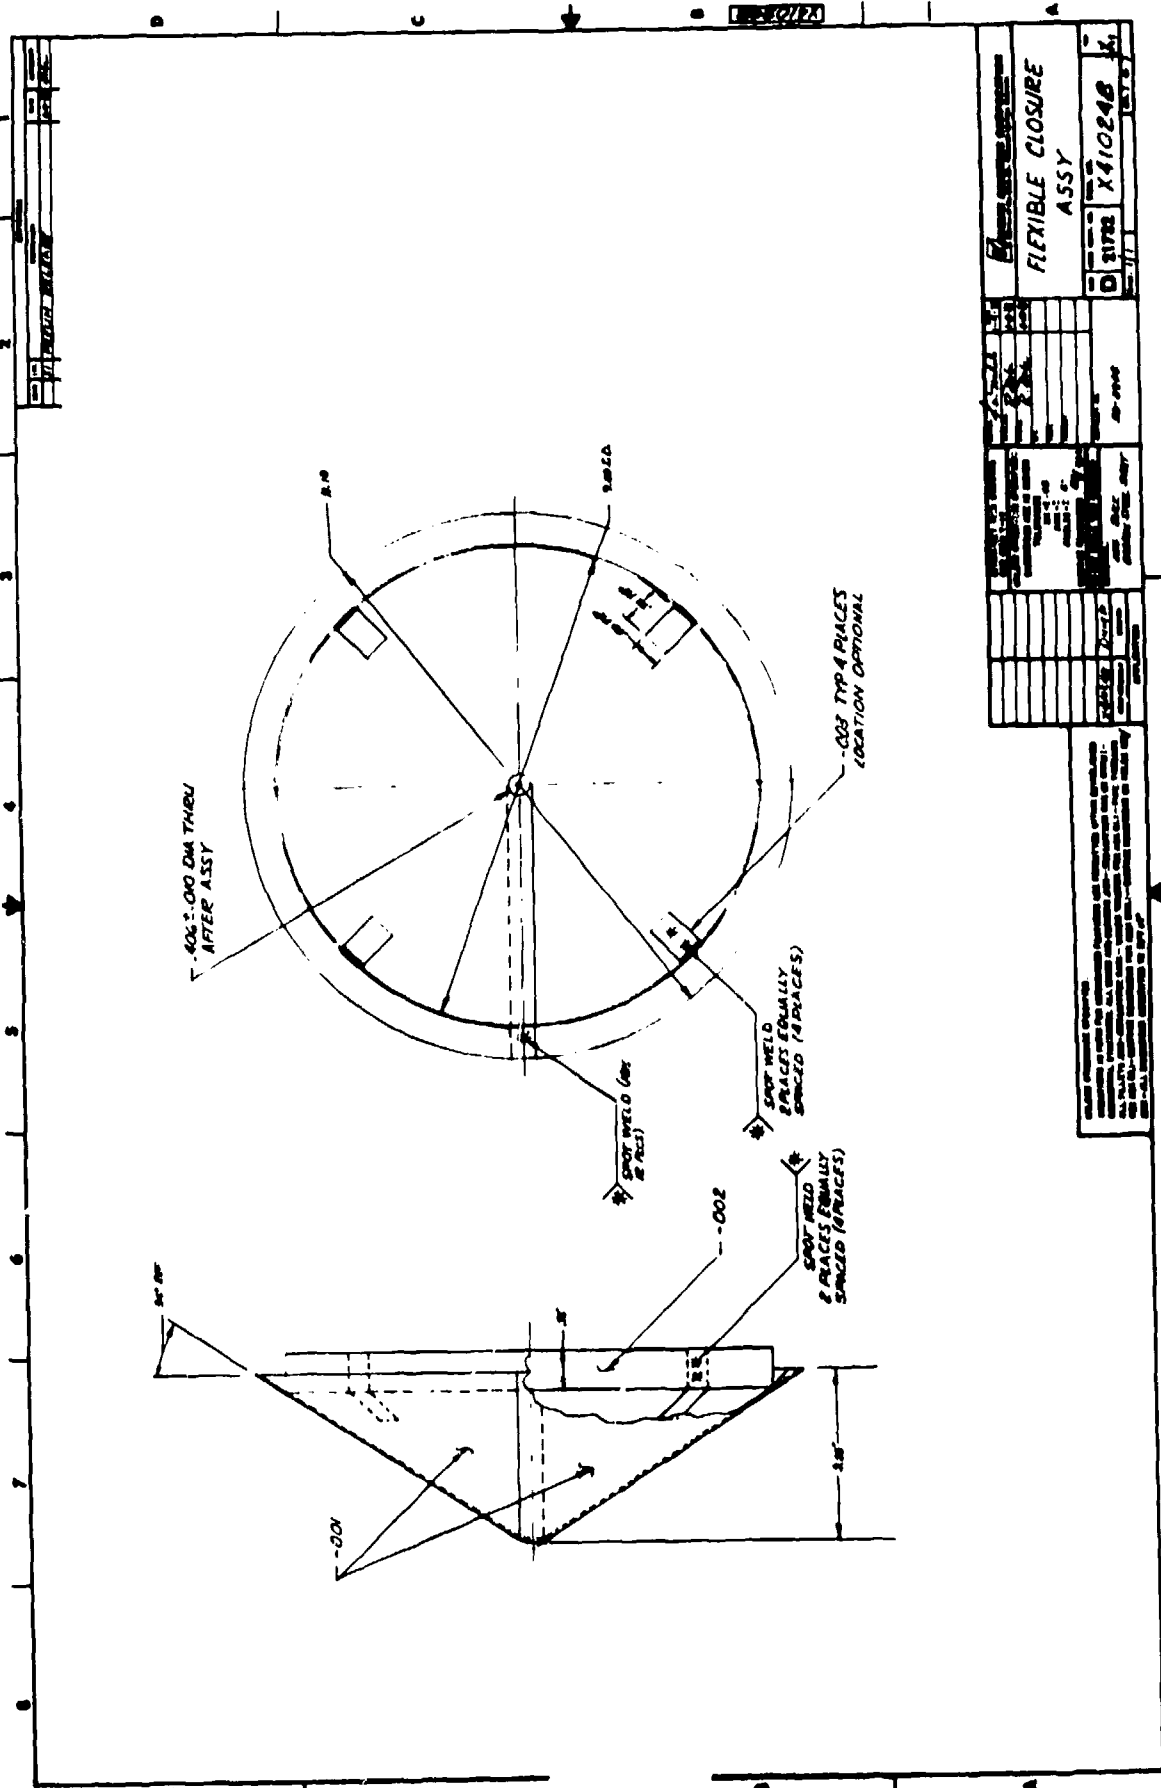

<p>REVISIONS</p> <table border="1"> <thead> <tr> <th>NO.</th> <th>DATE</th> <th>DESCRIPTION</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </tbody> </table>		NO.	DATE	DESCRIPTION									
NO.	DATE	DESCRIPTION											
<p>DATE: <input type="text"/></p> <p>BY: <input type="text"/></p> <p>CHKD: <input type="text"/></p> <p>APP'D: <input type="text"/></p>													
<p>PROJECT: <input type="text"/></p> <p>DWG. NO.: <input type="text"/></p> <p>REV. NO.: <input type="text"/></p> <p>REV. DATE: <input type="text"/></p>													
<p>DESCRIPTION: FLEXIBLE CLOSURE ASSY</p>													

THIS DRAWING IS THE PROPERTY OF THE U.S. GOVERNMENT AND IS LOANED TO YOUR ORGANIZATION. IT AND ITS CONTENTS ARE NOT TO BE DISTRIBUTED OUTSIDE YOUR ORGANIZATION. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED BY THE CONTRACT UNDER WHICH IT IS LOANED. IT IS TO BE RETURNED TO THE SOURCE OF ORIGIN UPON THE COMPLETION OF THE PROJECT OR AT THE END OF THE TERM OF THE CONTRACT UNDER WHICH IT IS LOANED. IT IS TO BE DESTROYED UPON THE REQUEST OF THE U.S. GOVERNMENT.

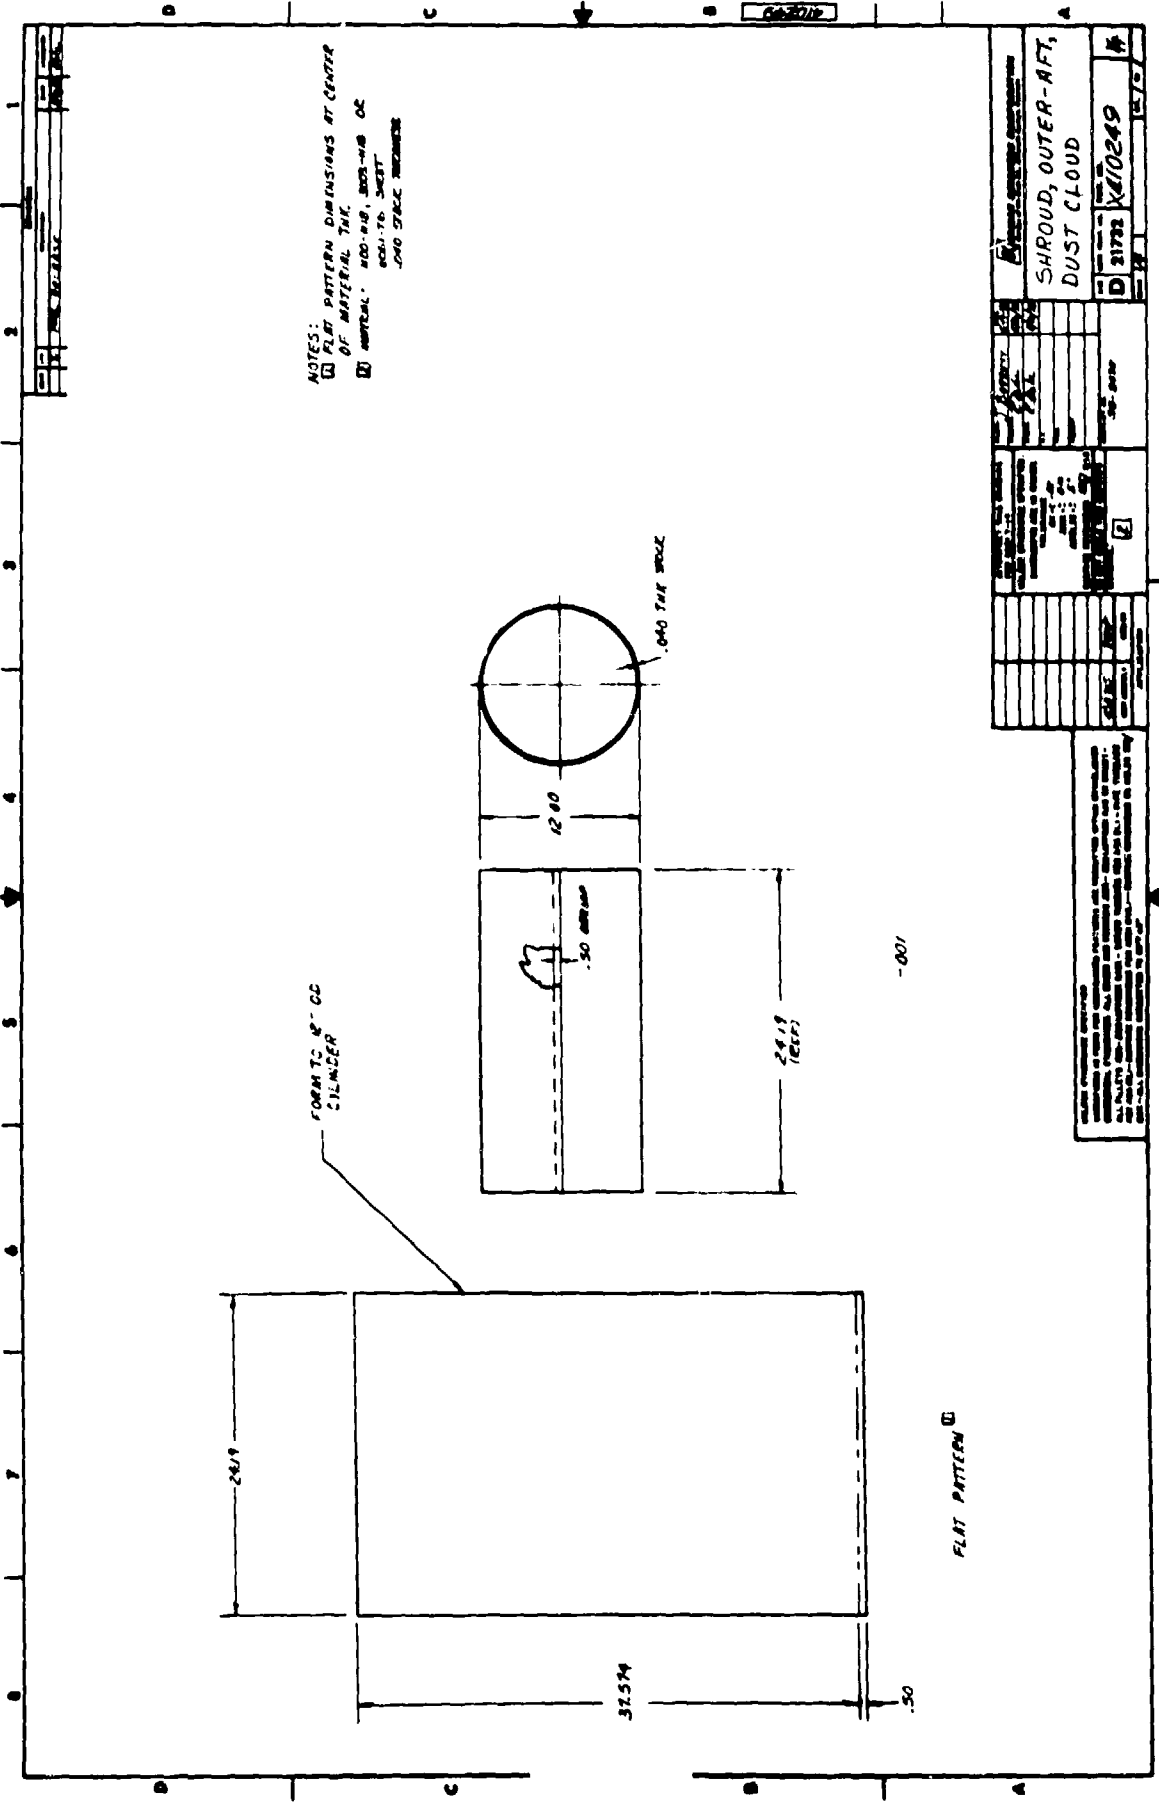


NOTES:
 (1) FLAT PATTERN DIMENSIONS AT CENTER
 OF MATERIAL THICKNESS
 (2) MATERIAL: 400-418, 3003-H18 O.C.
 (3) APPROVAL: 400-418, 3003-H18 O.C.
 400-418, 3003-H18 O.C.
 .040 STOCK THICKNESS

FLAT PATTERN (1)

-001

SHROUD, OUTER-AFT, DUST CLOUD	
D 3173	X 410249
DATE: 10/15/70 DRAWN BY: [Signature] CHECKED BY: [Signature] APPROVED BY: [Signature]	

THIS DRAWING IS THE PROPERTY OF THE
 AIR FORCE. IT IS TO BE KEPT IN THE
 ORIGINAL FILE. IT IS TO BE RETURNED
 TO THE OFFICE OF ORIGIN UPON REQUEST.
 ALL RIGHTS ARE RESERVED. NO PART OF
 THIS DRAWING IS TO BE REPRODUCED OR
 TRANSMITTED IN ANY FORM OR BY ANY
 MEANS, ELECTRONIC OR MECHANICAL,
 INCLUDING PHOTOCOPYING, RECORDING,
 OR BY ANY INFORMATION STORAGE AND
 RETRIEVAL SYSTEM, WITHOUT PERMISSION
 IN WRITING FROM THE AIR FORCE.

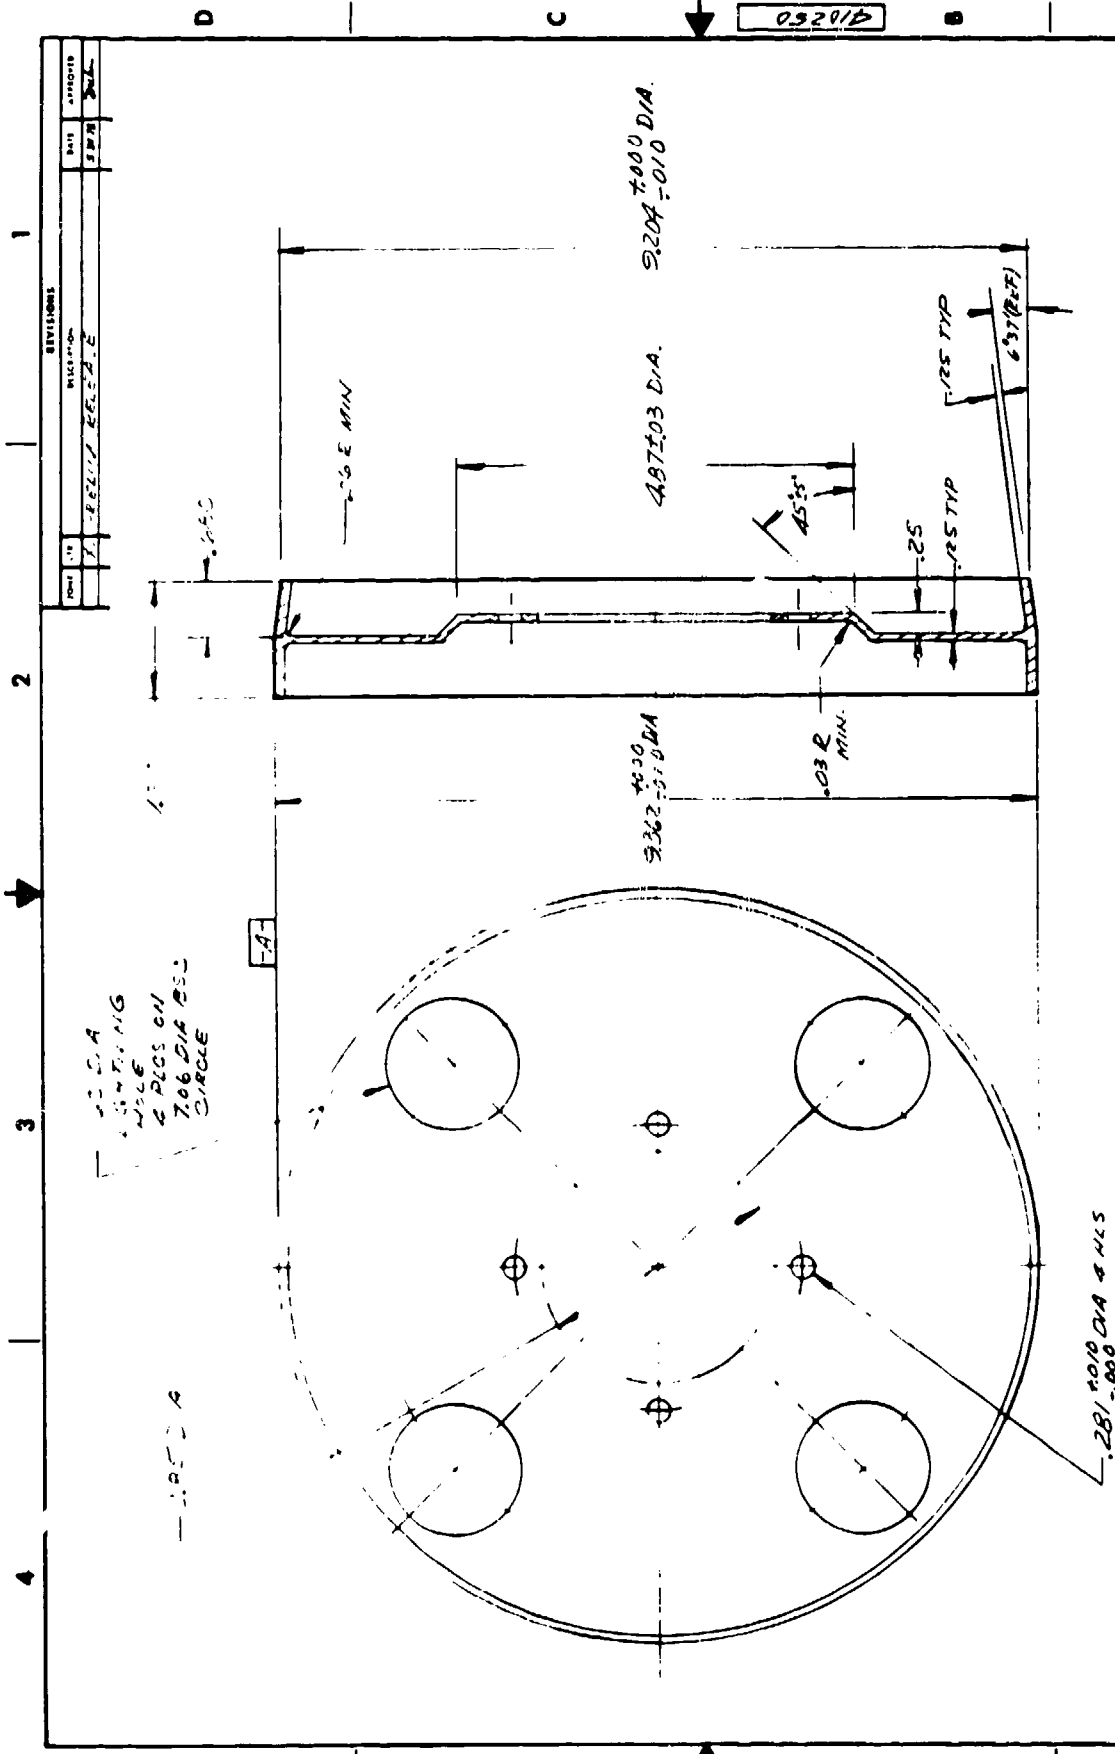

REVISIONS			
NO.	DATE	BY	APPROVE
1	11-18-54	W.C.E.	


 KAMAR ENGINEERS CORPORATION 1000 N. 10th St., Chicago, Illinois	
PART NO. 21732 REV. X DATE 11-18-54	PROJECT NO. 410250 DRAWING NO. X
TITLE RIB, FWD	SCALE 1:1
INTERPRET THIS DRAWING PER ANSI-10 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES FINISHES ANGLES 20° 30° SURFACE FINISHES 125 RA DO NOT SCALE THIS DRAWING MATERIAL 2024-T3 QUANTITY 606-T8 (SEE DRAWING 21732-1)	APPLICATION

UNLESS OTHERWISE SPECIFIED
 VARIATIONS IN FORM FOR UNMACHINED FEATURES ARE GOVERNED BY THE ESTABLISHED
 COMMERCIAL STANDARDS. ALL EDGES AND CORNERS 90°-180° UNLESS SHOWN OR CHAMFERED.
 ALL FILLETS 1/16" UNLESS OTHERWISE SPECIFIED. CLEARANCE PER ANSI B11-1. PIPES, TUBES AND
 PER ANSI B11-1. SURFACE FINISHES PER ANSI B46.1. SURFACE FINISHES ON HOLES TO
 BE ALL DIMENSIONS CONNECTED TO DIMENSIONS


15201

REV	DATE	BY	APP
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			

CYCLONE MODIFICATION	
2857 CLUD	
D 31732	X 410251
REV	DATE
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	

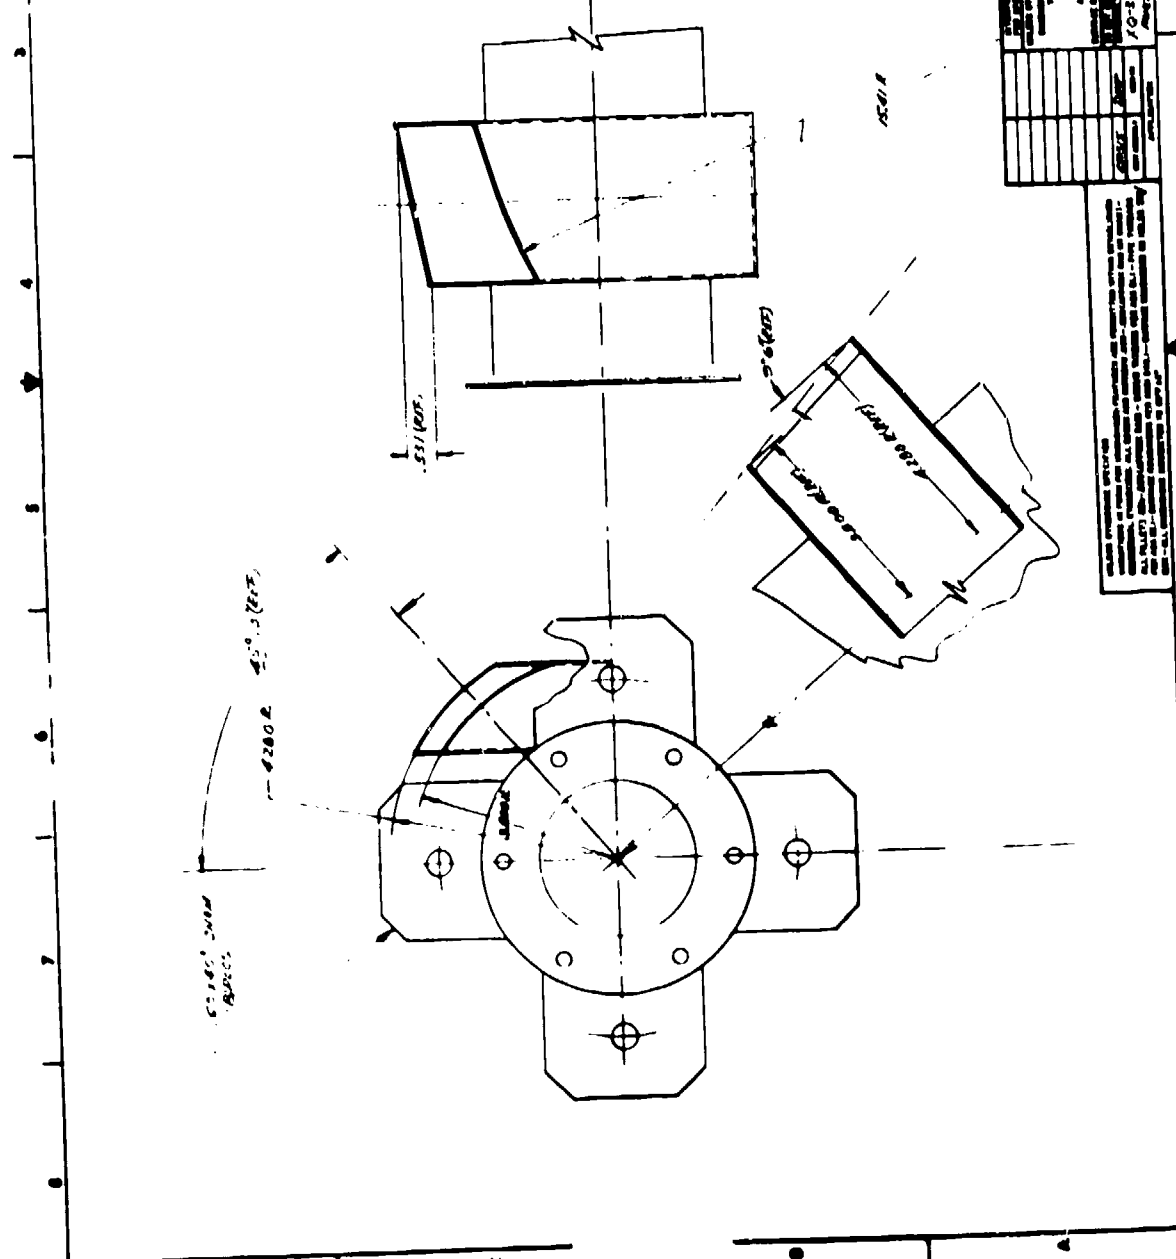

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
 ALL DIMENSIONS ARE TO BE TAKEN TO THE CENTER OF THE DIMENSION LINE UNLESS OTHERWISE SPECIFIED.
 ALL DIMENSIONS ARE TO BE TAKEN TO THE CENTER OF THE DIMENSION LINE UNLESS OTHERWISE SPECIFIED.
 ALL DIMENSIONS ARE TO BE TAKEN TO THE CENTER OF THE DIMENSION LINE UNLESS OTHERWISE SPECIFIED.

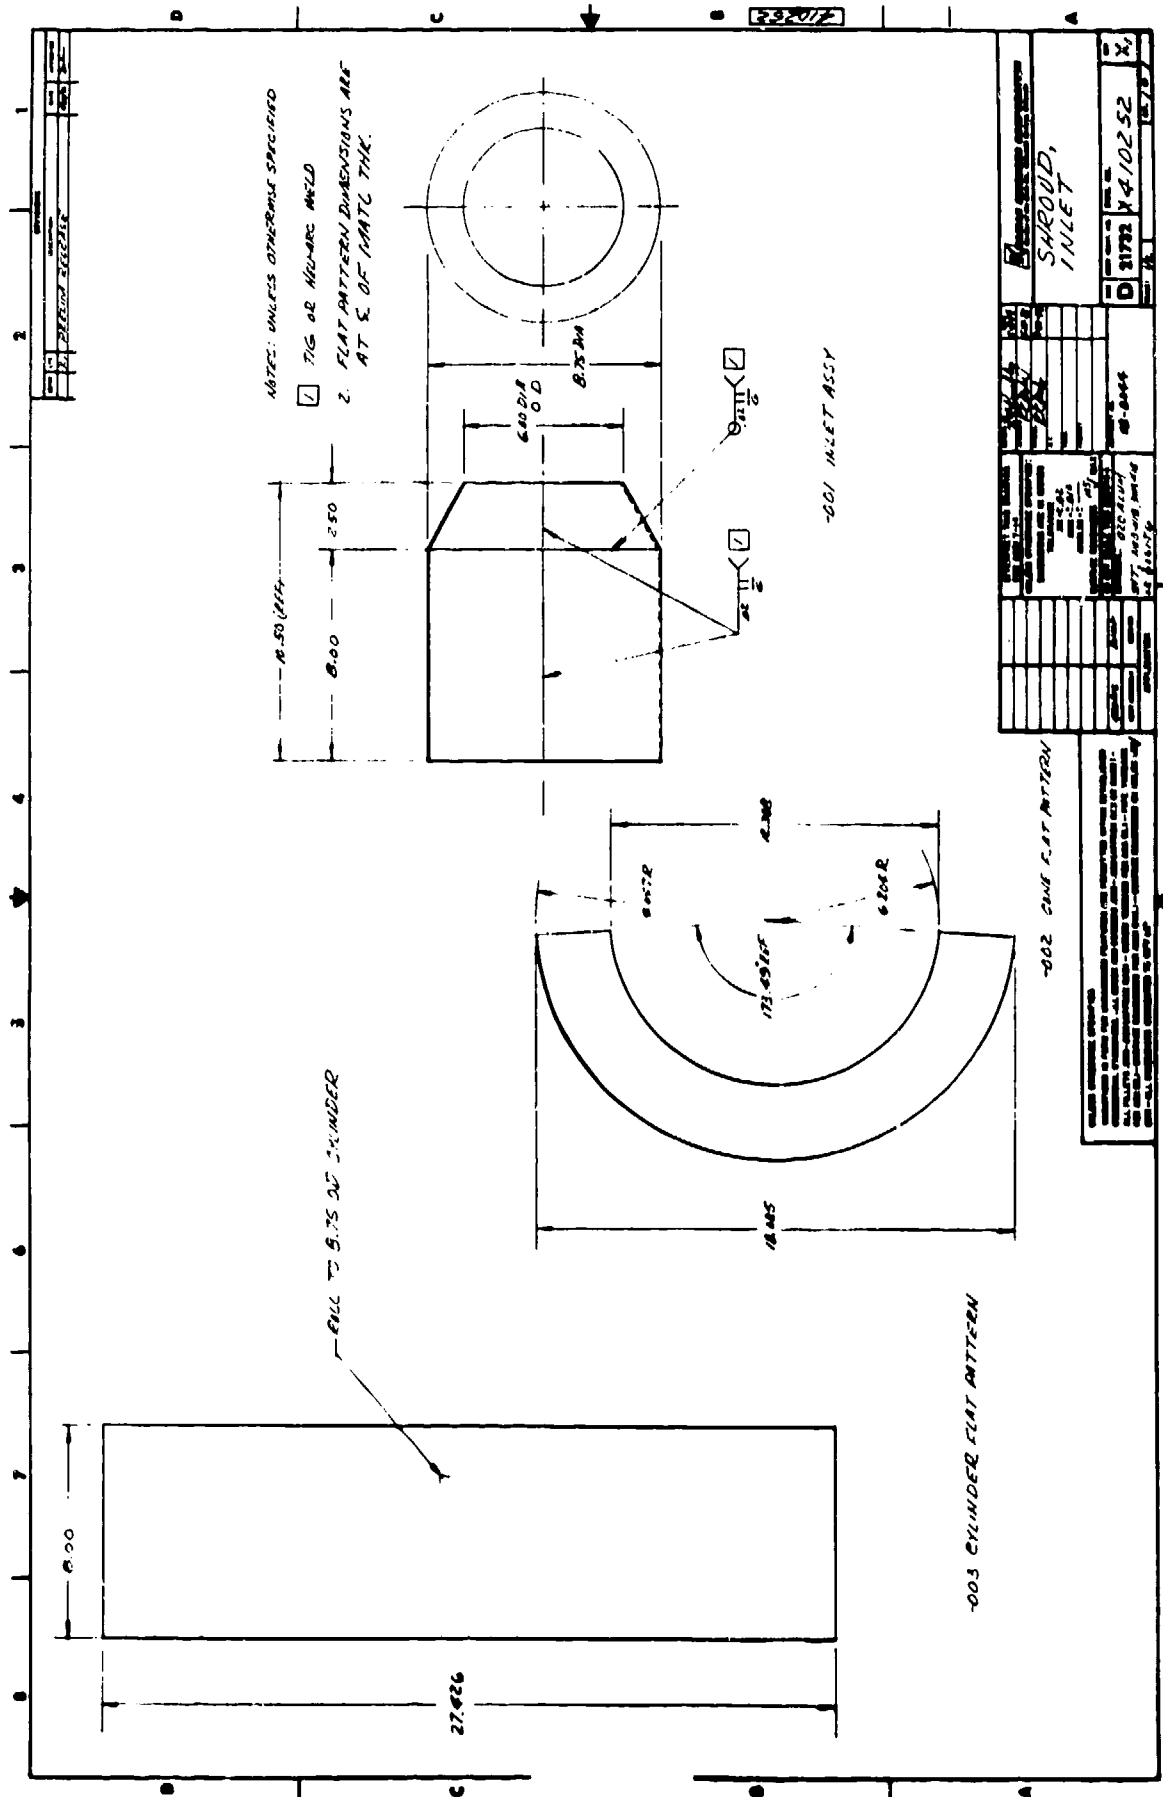


- NOTES: UNLESS OTHERWISE SPECIFIED
1. TIG OR MIG-ARC WELD
 2. FLAT PATTERN DIMENSIONS ARE AT 5. OF MAT'L THK.

REV	DATE	BY	CHKD
1			
DESIGNED BY: [Signature]			

PART NAME		SHROUD, INLET	
PART NO.		D 3173	
REV.		Y410252	
DATE		10-78	
DRAWN BY		[Signature]	
CHECKED BY		[Signature]	
MATERIAL		[Blank]	
FINISH		[Blank]	
QUANTITY		[Blank]	
UNIT		[Blank]	
SCALE		[Blank]	
SHEET NO.		[Blank]	
TOTAL SHEETS		[Blank]	

THIS DRAWING IS THE PROPERTY OF THE COMPANY AND IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF THE COMPANY. ALL RIGHTS ARE RESERVED. THE COMPANY ASSUMES NO LIABILITY FOR ANY DAMAGE OR LOSS OF PROFITS, BUSINESS, OR REVENUE, OR FOR ANY SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, WHETHER IN AN ACTION OF CONTRACT, TORT, OR OTHERWISE, ARISING FROM THE USE OF THIS DRAWING.

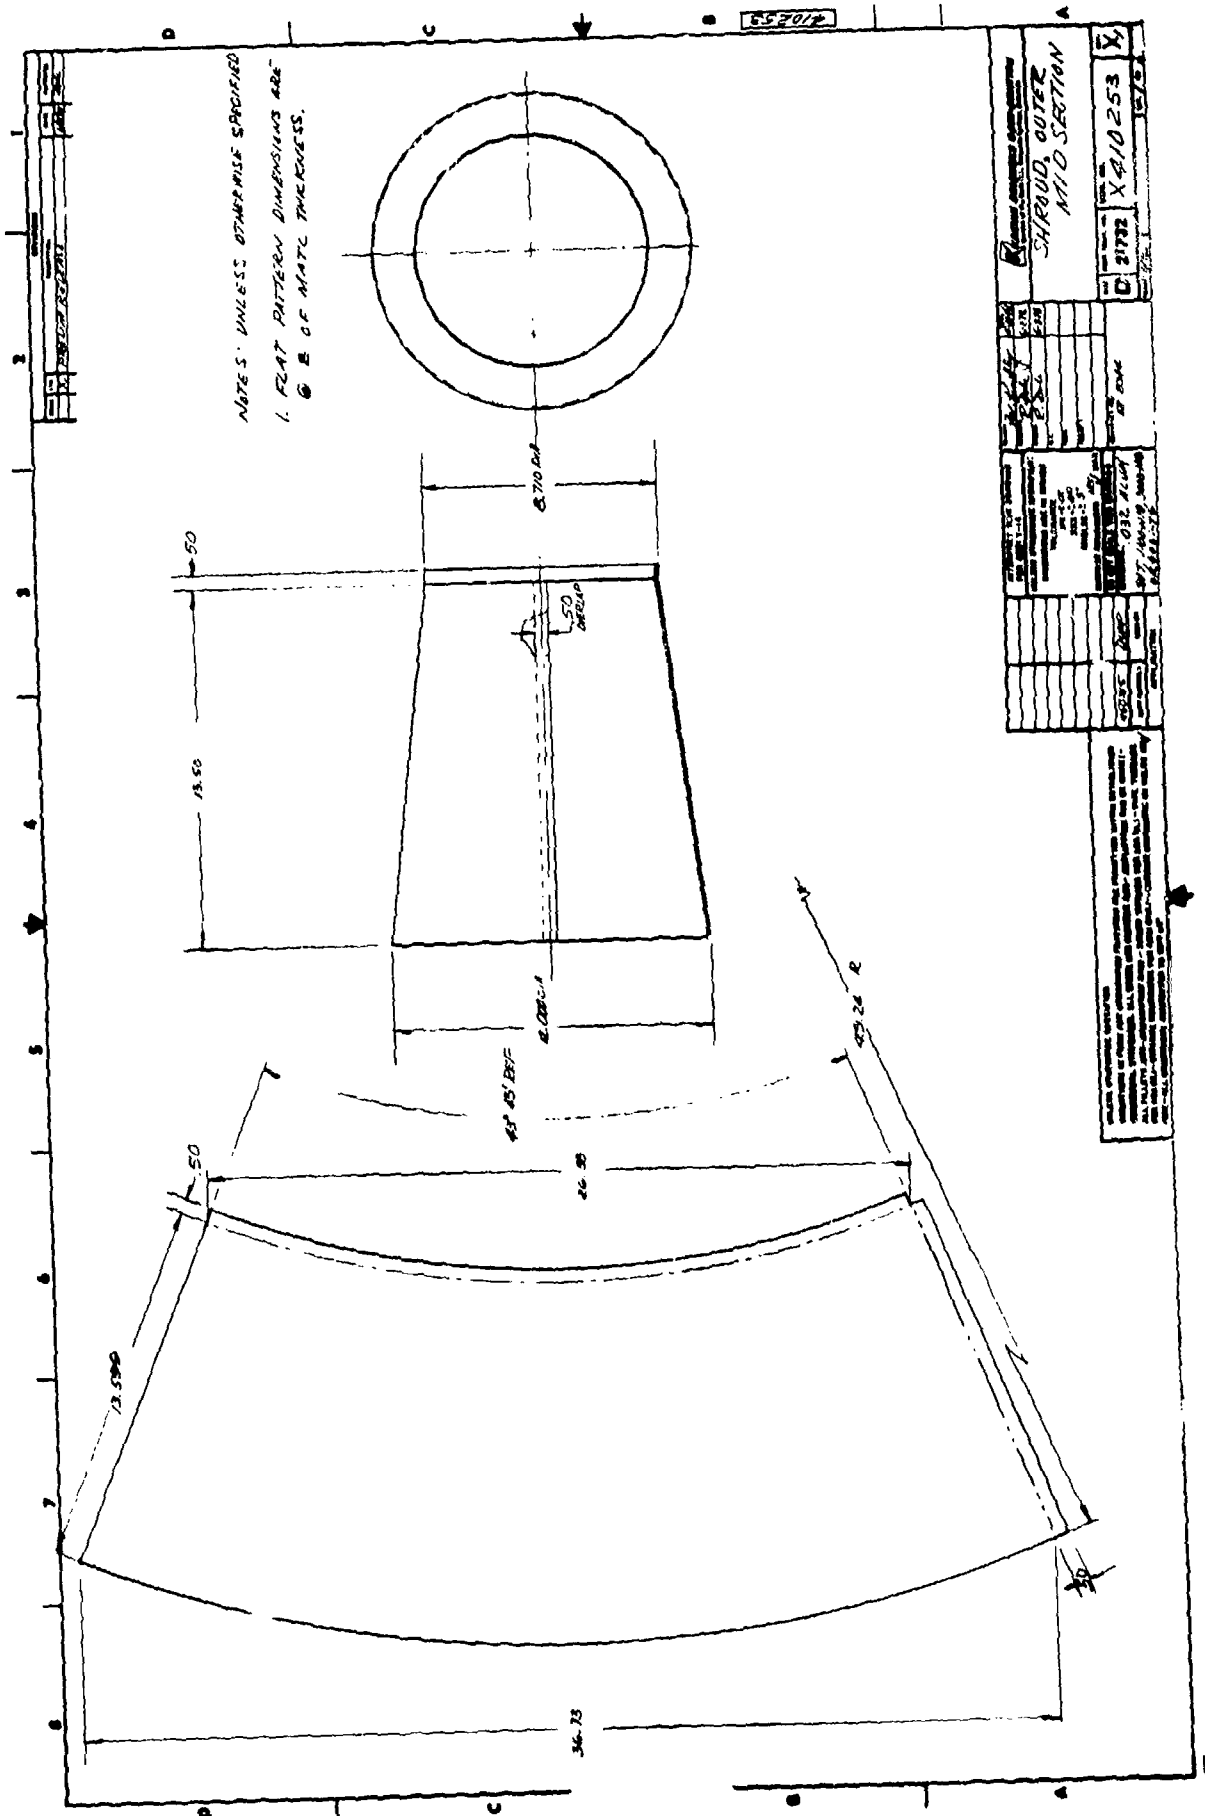


NOTES: UNLESS OTHERWISE SPECIFIED
 1. FLAT PATTERN DIMENSIONS ARE
 @ 0.6 MATL THICKNESS.

557012

SHROUD, OUTER
 MID SECTION

C 3172 X 210253

REVISIONS
 1. REV. 1.00 11/17/53
 2. REV. 1.01 11/17/53
 3. REV. 1.02 11/17/53
 4. REV. 1.03 11/17/53
 5. REV. 1.04 11/17/53
 6. REV. 1.05 11/17/53
 7. REV. 1.06 11/17/53
 8. REV. 1.07 11/17/53
 9. REV. 1.08 11/17/53
 10. REV. 1.09 11/17/53
 11. REV. 1.10 11/17/53
 12. REV. 1.11 11/17/53
 13. REV. 1.12 11/17/53
 14. REV. 1.13 11/17/53
 15. REV. 1.14 11/17/53
 16. REV. 1.15 11/17/53
 17. REV. 1.16 11/17/53
 18. REV. 1.17 11/17/53
 19. REV. 1.18 11/17/53
 20. REV. 1.19 11/17/53
 21. REV. 1.20 11/17/53
 22. REV. 1.21 11/17/53
 23. REV. 1.22 11/17/53
 24. REV. 1.23 11/17/53
 25. REV. 1.24 11/17/53
 26. REV. 1.25 11/17/53
 27. REV. 1.26 11/17/53
 28. REV. 1.27 11/17/53
 29. REV. 1.28 11/17/53
 30. REV. 1.29 11/17/53
 31. REV. 1.30 11/17/53
 32. REV. 1.31 11/17/53
 33. REV. 1.32 11/17/53
 34. REV. 1.33 11/17/53
 35. REV. 1.34 11/17/53
 36. REV. 1.35 11/17/53
 37. REV. 1.36 11/17/53
 38. REV. 1.37 11/17/53
 39. REV. 1.38 11/17/53
 40. REV. 1.39 11/17/53
 41. REV. 1.40 11/17/53
 42. REV. 1.41 11/17/53
 43. REV. 1.42 11/17/53
 44. REV. 1.43 11/17/53
 45. REV. 1.44 11/17/53
 46. REV. 1.45 11/17/53
 47. REV. 1.46 11/17/53
 48. REV. 1.47 11/17/53
 49. REV. 1.48 11/17/53
 50. REV. 1.49 11/17/53
 51. REV. 1.50 11/17/53
 52. REV. 1.51 11/17/53
 53. REV. 1.52 11/17/53
 54. REV. 1.53 11/17/53
 55. REV. 1.54 11/17/53
 56. REV. 1.55 11/17/53
 57. REV. 1.56 11/17/53
 58. REV. 1.57 11/17/53
 59. REV. 1.58 11/17/53
 60. REV. 1.59 11/17/53
 61. REV. 1.60 11/17/53
 62. REV. 1.61 11/17/53
 63. REV. 1.62 11/17/53
 64. REV. 1.63 11/17/53
 65. REV. 1.64 11/17/53
 66. REV. 1.65 11/17/53
 67. REV. 1.66 11/17/53
 68. REV. 1.67 11/17/53
 69. REV. 1.68 11/17/53
 70. REV. 1.69 11/17/53
 71. REV. 1.70 11/17/53
 72. REV. 1.71 11/17/53
 73. REV. 1.72 11/17/53
 74. REV. 1.73 11/17/53
 75. REV. 1.74 11/17/53
 76. REV. 1.75 11/17/53
 77. REV. 1.76 11/17/53
 78. REV. 1.77 11/17/53
 79. REV. 1.78 11/17/53
 80. REV. 1.79 11/17/53
 81. REV. 1.80 11/17/53
 82. REV. 1.81 11/17/53
 83. REV. 1.82 11/17/53
 84. REV. 1.83 11/17/53
 85. REV. 1.84 11/17/53
 86. REV. 1.85 11/17/53
 87. REV. 1.86 11/17/53
 88. REV. 1.87 11/17/53
 89. REV. 1.88 11/17/53
 90. REV. 1.89 11/17/53
 91. REV. 1.90 11/17/53
 92. REV. 1.91 11/17/53
 93. REV. 1.92 11/17/53
 94. REV. 1.93 11/17/53
 95. REV. 1.94 11/17/53
 96. REV. 1.95 11/17/53
 97. REV. 1.96 11/17/53
 98. REV. 1.97 11/17/53
 99. REV. 1.98 11/17/53
 100. REV. 1.99 11/17/53
 101. REV. 1.100 11/17/53

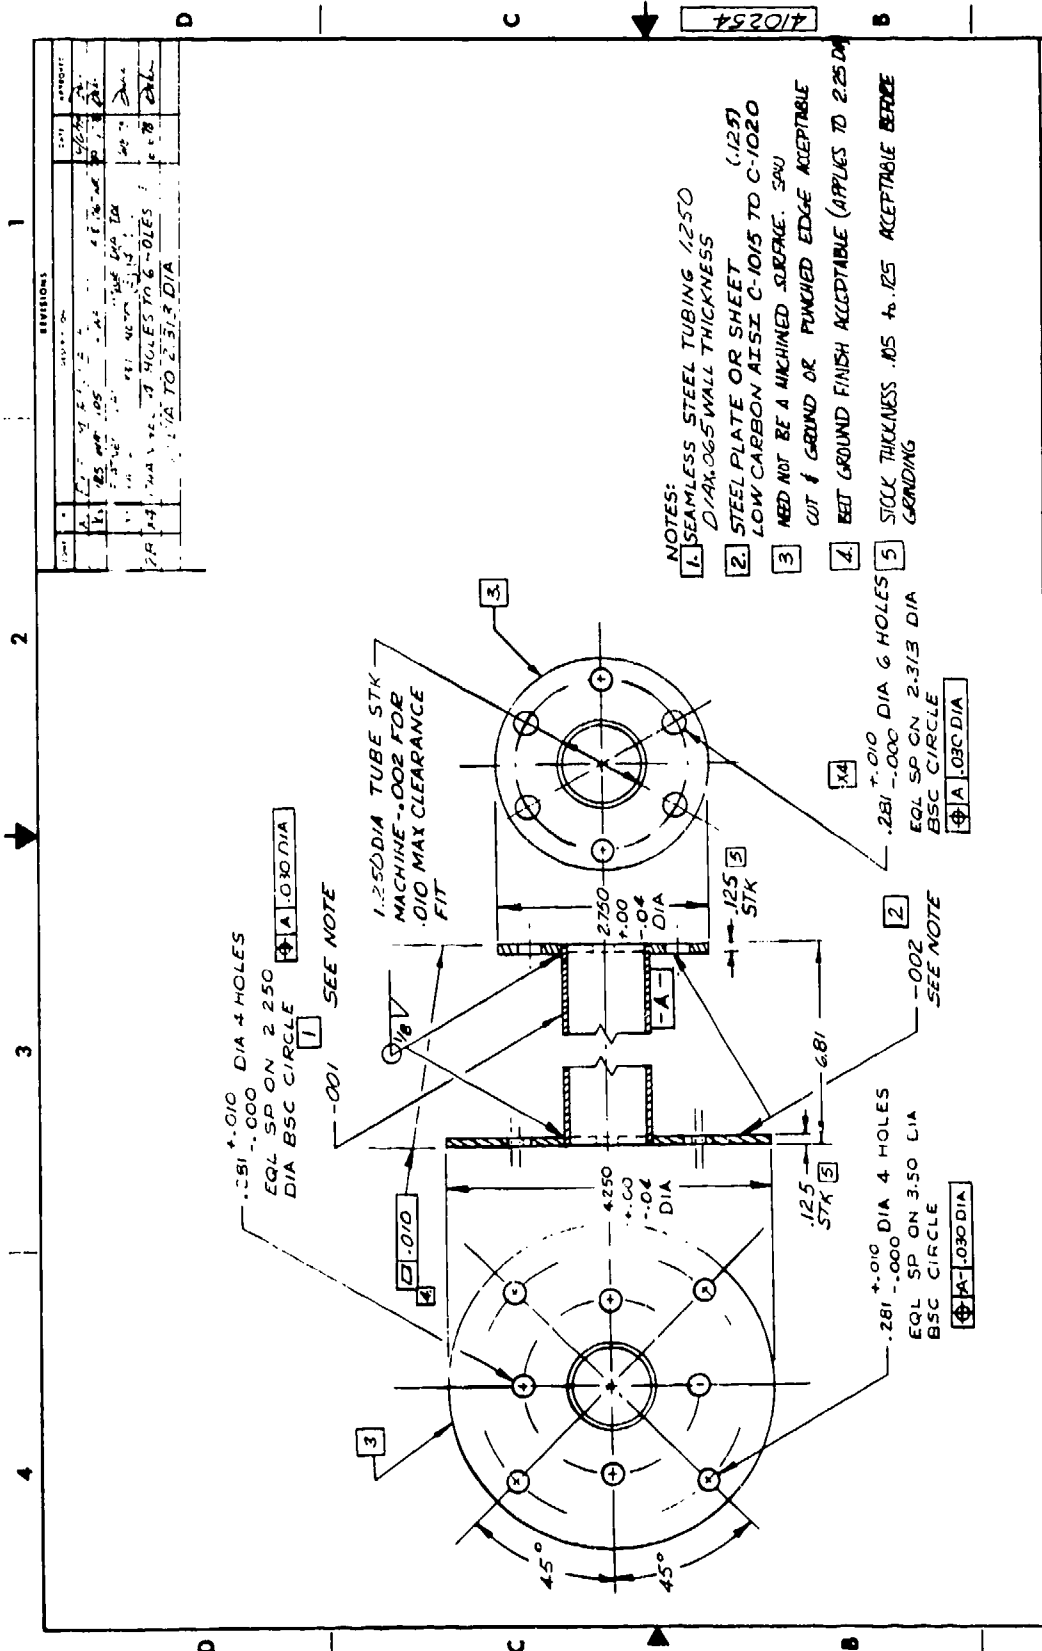

- NOTES:
1. SEAMLESS STEEL TUBING 1/250 DIA X .065 WALL THICKNESS
 2. STEEL PLATE OR SHEET (1/25) LOW CARBON A151 C-1015 TO C-1020
 3. NEED NOT BE A MACHINED SURFACE. SP4
 4. CUT & GROUND OR PUNCHED EDGE ACCEPTABLE
 5. BEST GROUND FINISH ACCEPTABLE (APPLIES TO 2.250 DIA STOCK THICKNESS .05 to .125 ACCEPTABLE BEHIND GRINDING)

REV	DATE	BY	CHKD	APPROVE
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				

REVISIONS


1. Holes to 6 - Dies

2. Dia to 2.313 DIA

INTEREST THIS DRAWING PER ASSEMBLY - 14 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES TOLERANCE XXX ± .010 ANGLES ± 0.30° SURFACE ROUGHNESS MAX 30 NOT SCALE THIS DRAWING MATERIAL		J.W. NICHOLS TITLE: <i>Design Engineer</i> NO: <i>2228/17</i> PROJ:	KALMAR SCIENCES CORPORATION CHAMBER, DEAD AIR SPACE
UNLESS OTHERWISE SPECIFIED VARIATIONS IN FORM FOR UNIFORM FEATURES ARE PERMITTED TO ESTABLISH THE COMMERCIAL STANDARDS FOR EDGES AND CORNERS. CORNERS SHALL BE ROUNDED TO A MINIMUM RADIUS OF .010 INCHES PER ASSEMBLY. SURFACE FINISH SHALL BE TO THE STANDARD SPECIFIED PER ASSEMBLY. UNLESS OTHERWISE SPECIFIED.		C 21732 X 410134 REV: 1 DATE: 11-1-54	CHAMBER, DEAD AIR SPACE

THIS PAGE IS BEST QUALITY REPRODUCIBLE FROM COPY FURNISHED TO DDC

1	2	3	4	5	6	7	8
REVISION	DATE	BY	APP. BY	REVISION	DATE	BY	APP. BY
1	10/23/55	J. M. ...		2	11/17/55	J. M. ...	
3	11/17/55	J. M. ...		4	11/17/55	J. M. ...	

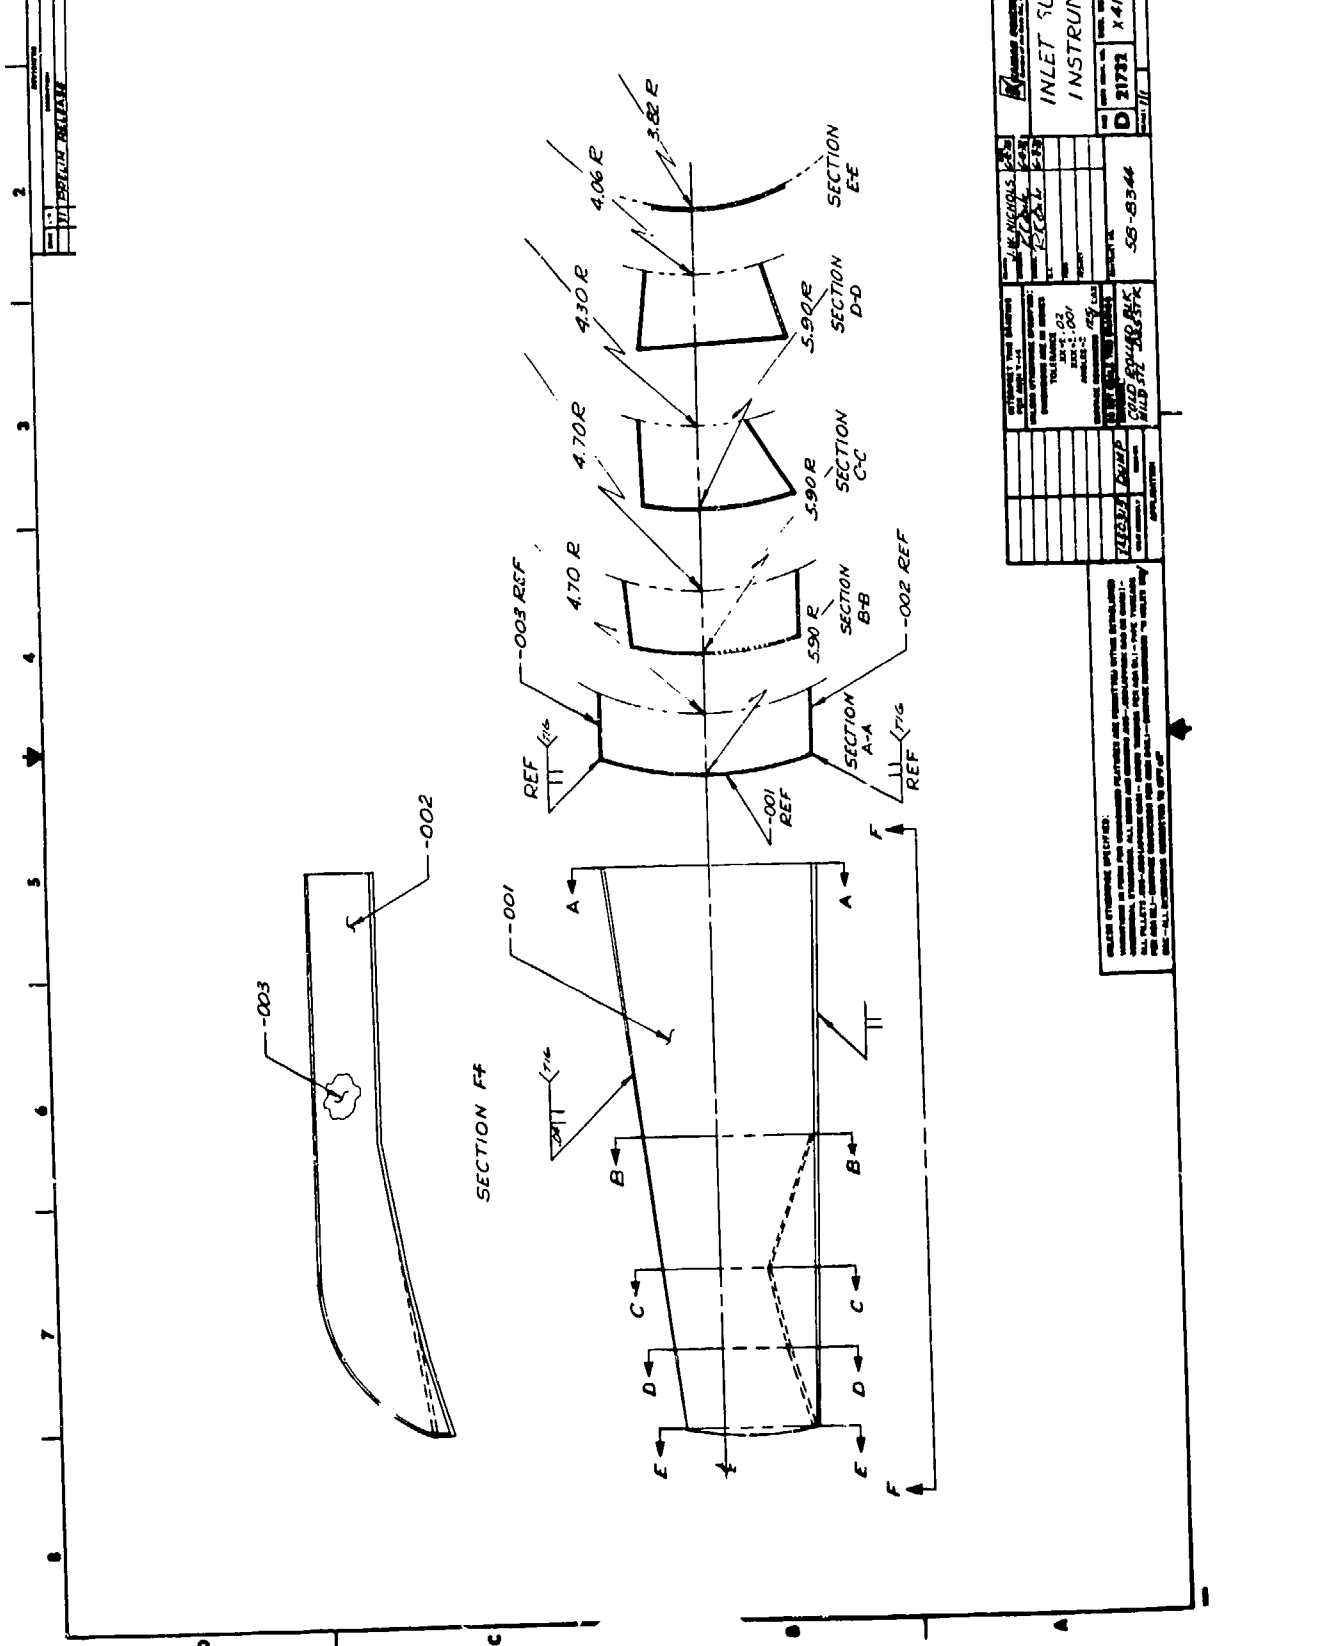

SECTION FF

SECTION A-A

SECTION B-B

SECTION C-C

SECTION D-D

SECTION E-E

REVISION	DATE	BY	APP. BY
1	10/23/55	J. M. ...	
2	11/17/55	J. M. ...	
3	11/17/55	J. M. ...	

SECTION A-A

SECTION B-B

SECTION C-C

SECTION D-D

SECTION E-E


INLET SUB ASSY,
INSTRUMENT POD


DATE 11/17/55

DRAWING NO. X410255

58-8344


ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED ARE IN INCHES AND DECIMALS THEREOF. DIMENSIONS ARE TO BE TAKEN FROM THE DIMENSION LINES UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE TO BE TAKEN FROM THE DIMENSION LINES UNLESS OTHERWISE SPECIFIED.

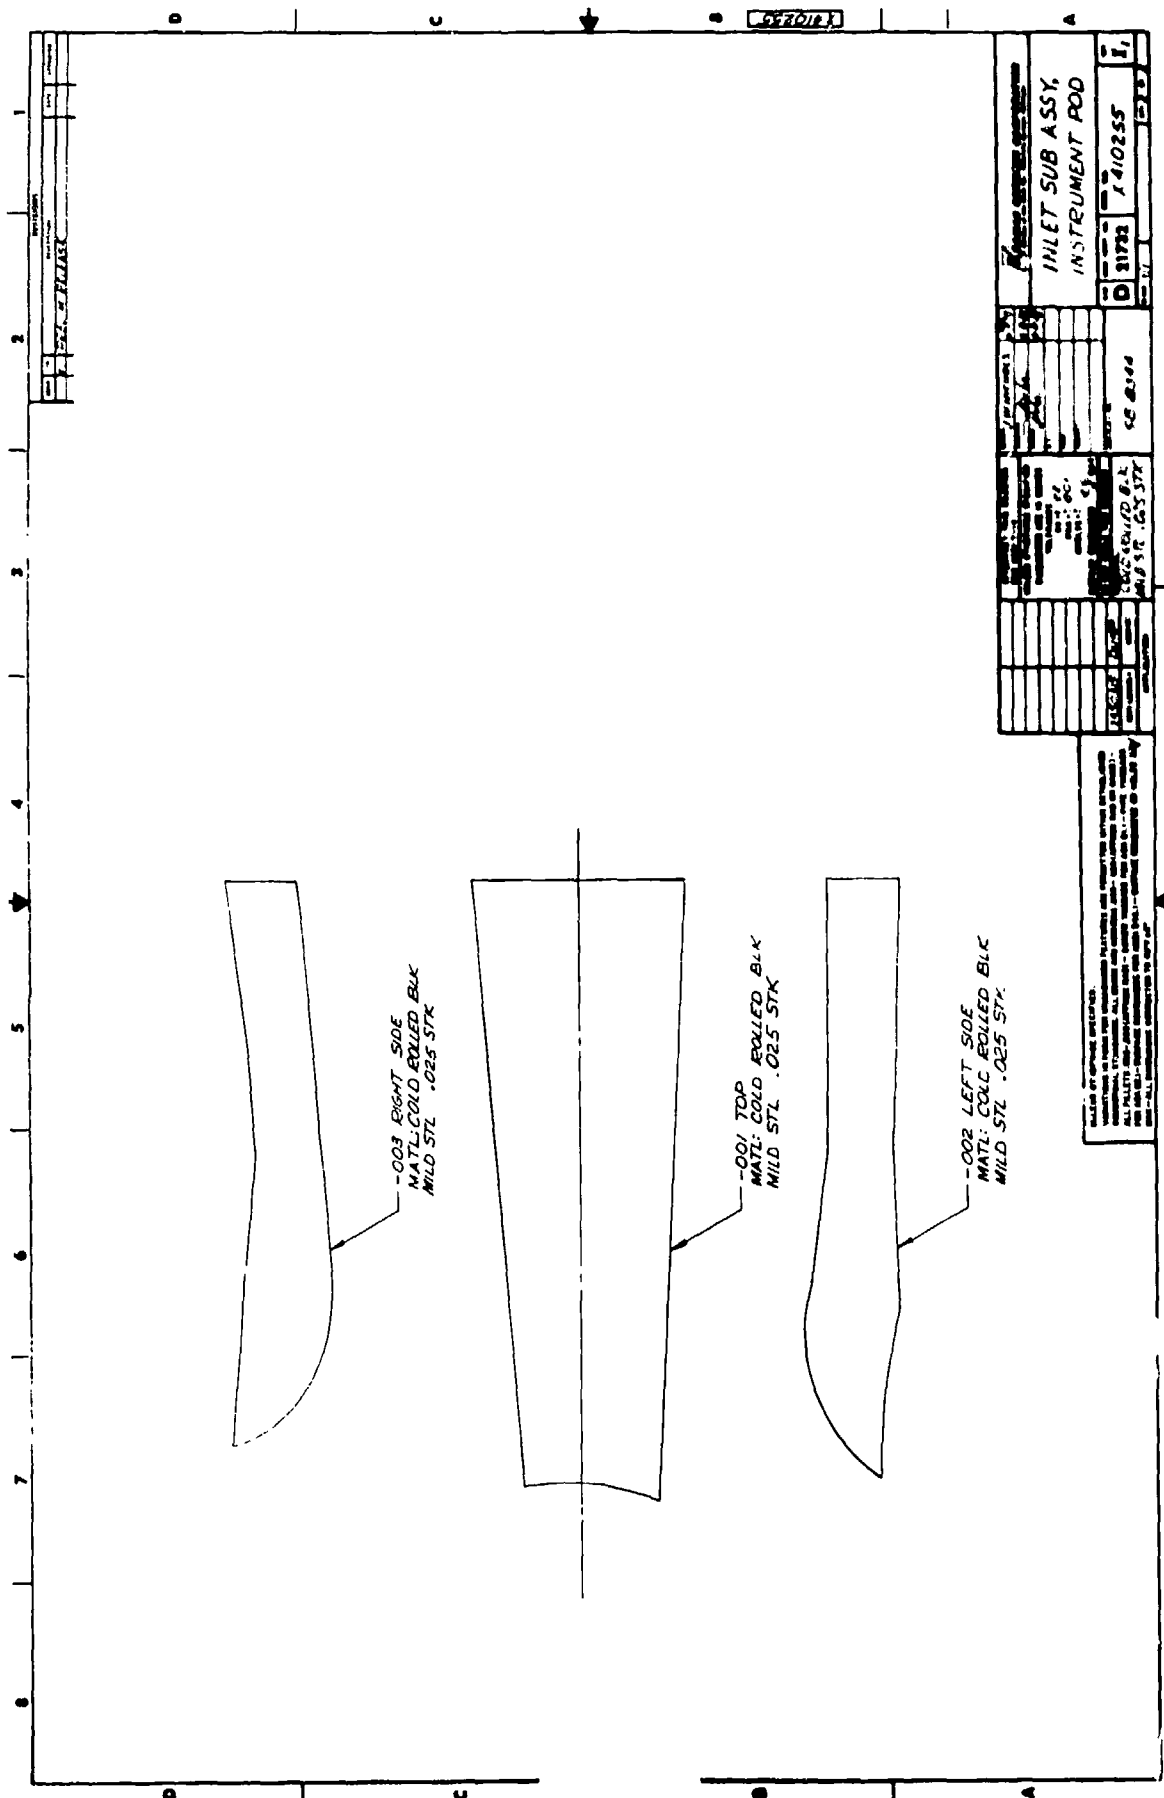

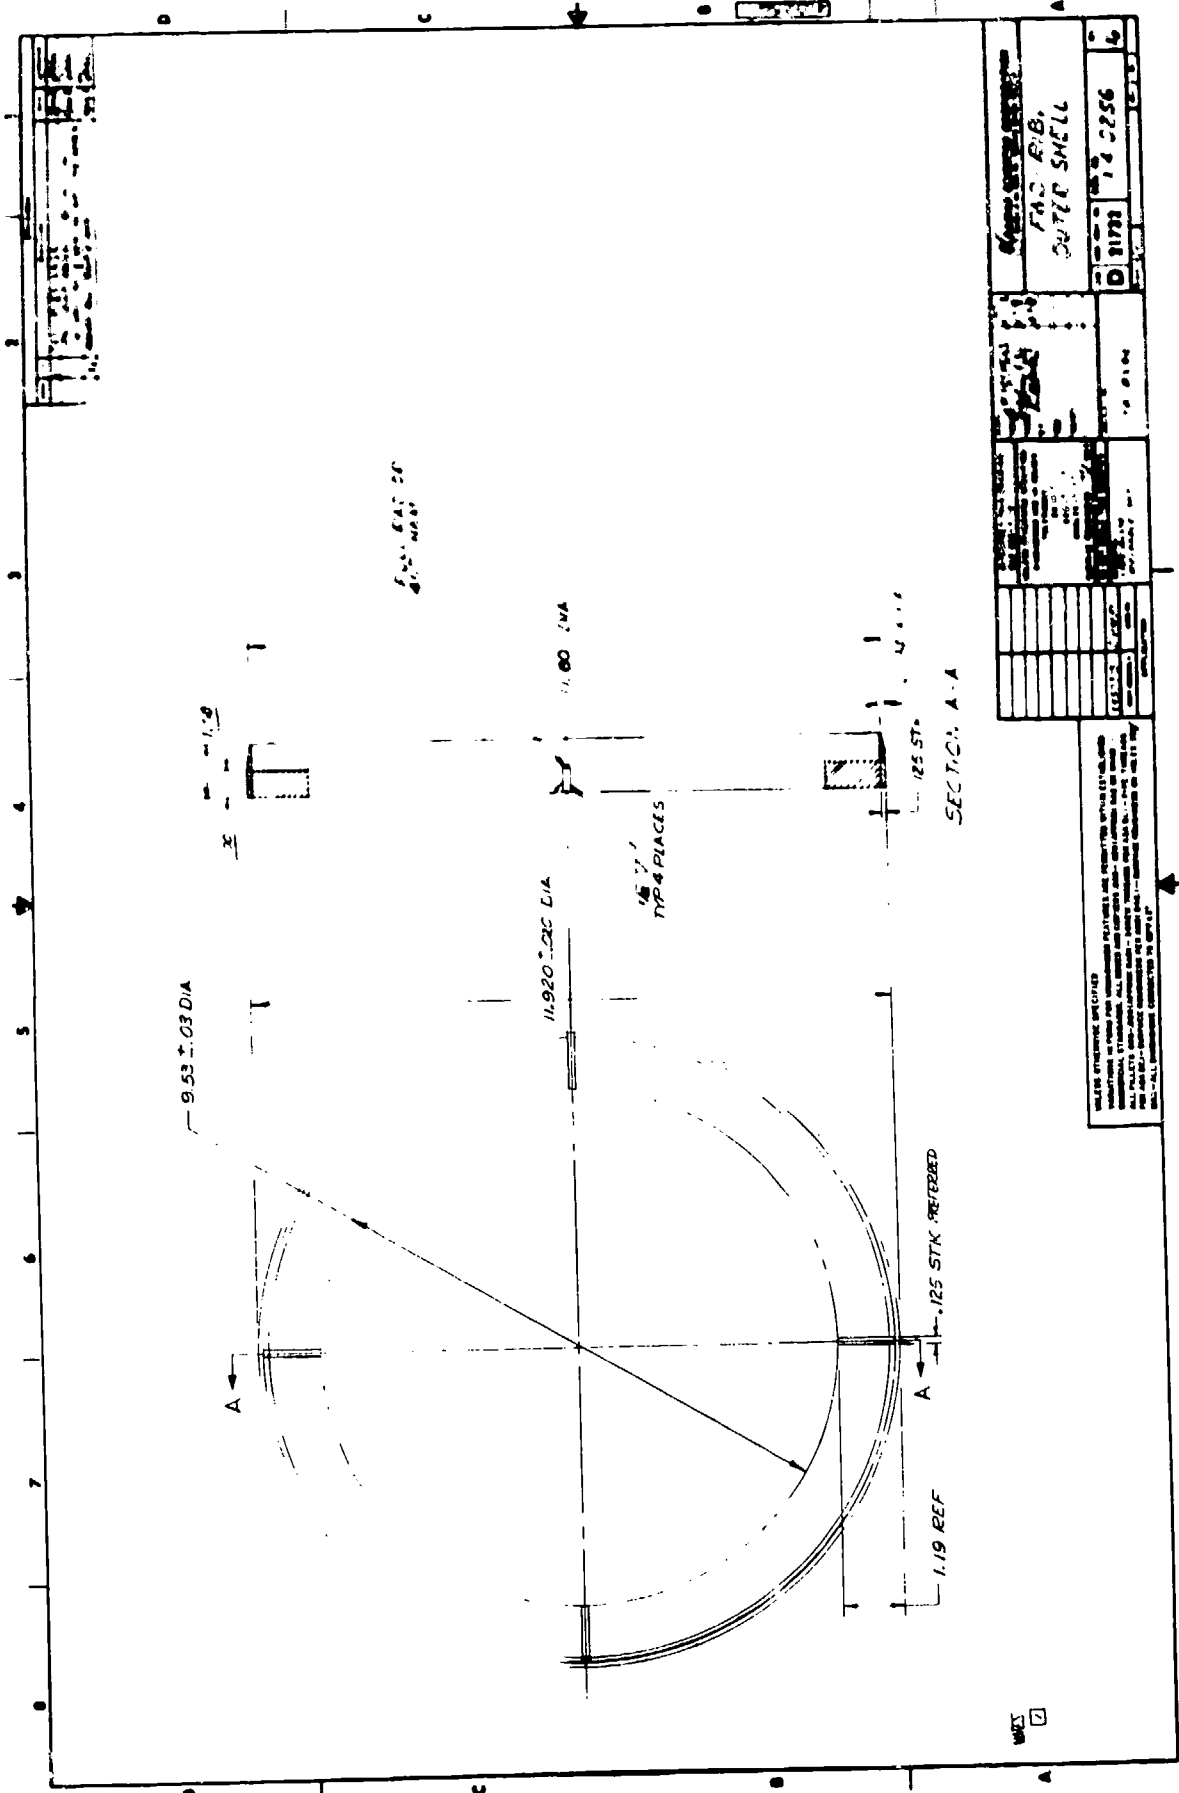

PART NO. 74 0256	
Q 3173	74 0256
REV. 1	
REV. 2	
REV. 3	
REV. 4	
REV. 5	
REV. 6	
REV. 7	
REV. 8	
REV. 9	
REV. 10	
REV. 11	
REV. 12	
REV. 13	
REV. 14	
REV. 15	
REV. 16	
REV. 17	
REV. 18	
REV. 19	
REV. 20	


UNLESS OTHERWISE SPECIFIED
 MATERIALS SHALL BE AS SPECIFIED IN THE DRAWING
 UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES
 UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES
 ALL DIMENSIONS ARE TO BE TAKEN FROM THE CENTERLINE UNLESS
 OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE TO BE TAKEN FROM THE CENTERLINE UNLESS
 OTHERWISE SPECIFIED

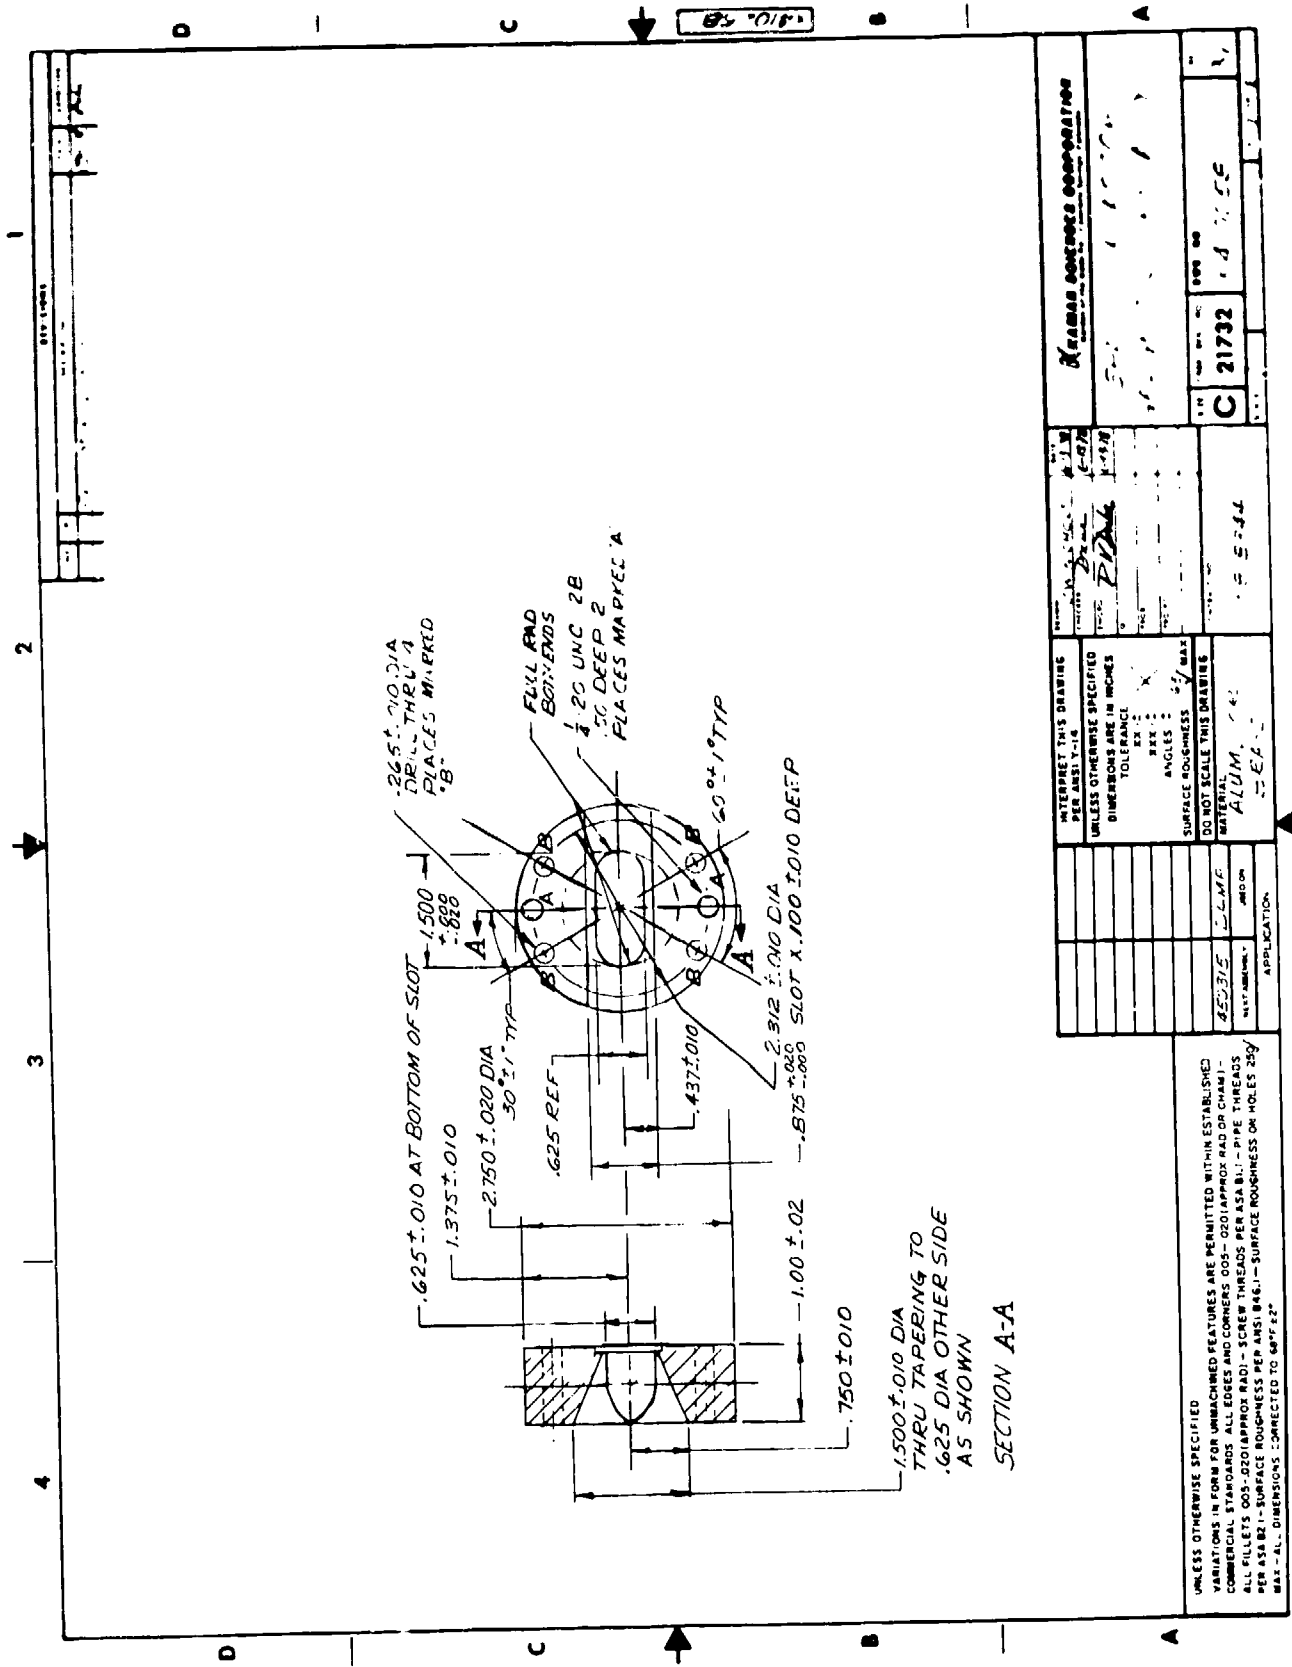

REV	DATE	BY	CHKD
1			


INTERPRET THIS DRAWING PER ANSI Y-14 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE FEES: <input type="checkbox"/> EX <input type="checkbox"/> X ANGLES: <input type="checkbox"/> MAX SURFACE ROUGHNESS: <input type="checkbox"/> MAX		MATERIAL: ALUM. PART NUMBER: 452315 QUANTITY: 1000 APPLICATION:
DRAWN: P. J. W. CHECKED: P. J. W. DATE: 1-1-54	C 21732 1954	FEDERAL BUREAU OF INVESTIGATION U.S. DEPARTMENT OF JUSTICE

UNLESS OTHERWISE SPECIFIED VARIATIONS IN FORM FOR UNMACHINED FEATURES ARE PERMITTED WITHIN ESTABLISHED COMMERCIAL STANDARDS. ALL EDGES AND CORNERS .005 - .020 APPROX RAD OR CHAMF. ALL FILLETS .003 - .020 APPROX RAD. - SCREW THREADS PER ASA B.1. - PIPE THREADS PER ASA B.1. - SURFACE ROUGHNESS PER ANSI B.46.1 - SURFACE ROUGHNESS ON HOLES 250 PER ASA B.2. - ALL DIMENSIONS CORRECTED TO 68°F ± 2°

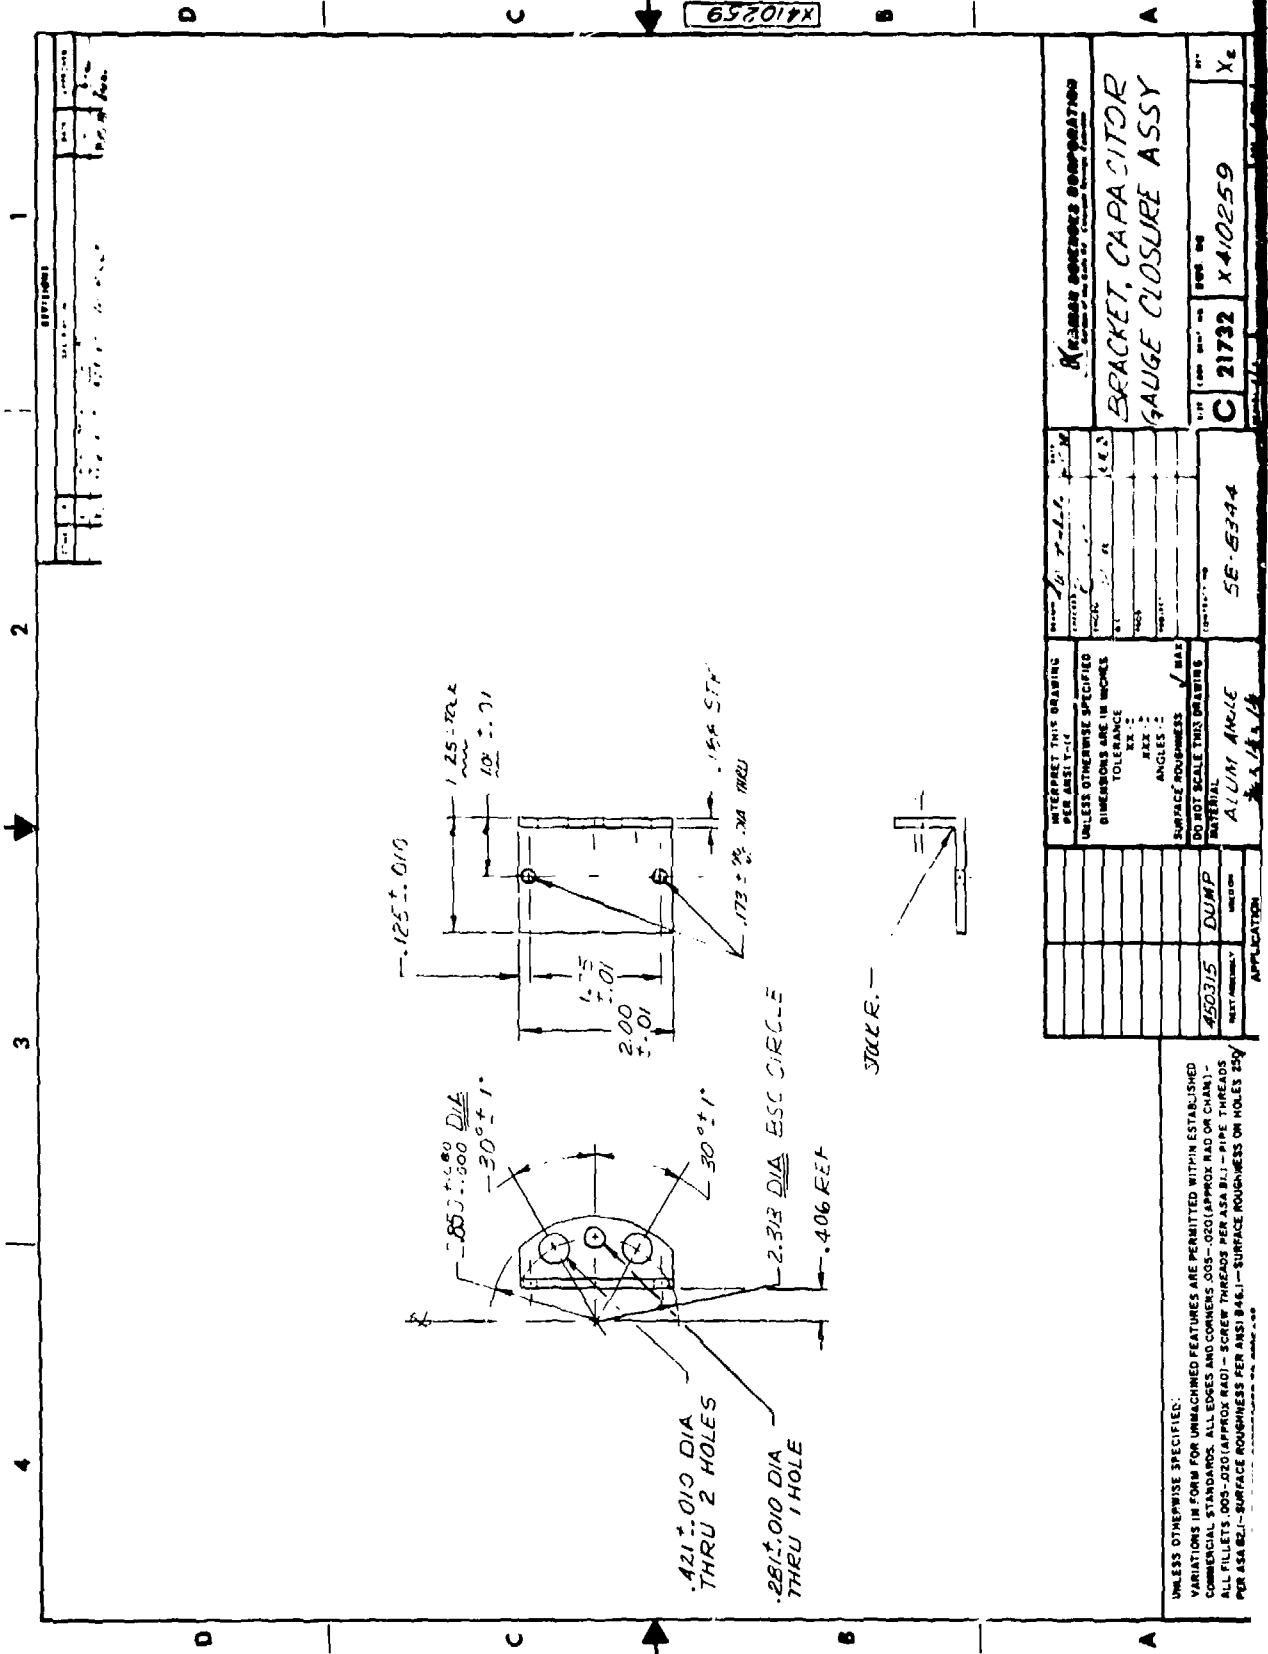

K410259 BRACKET, CAPACITOR GAUGE CLOSURE ASSY	
PART NO. C 21732 REV. X410259	DRAWING NO. 5E-5344
INTERPRET THIS DRAWING PER ANSI Y-14 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE XX ± ANGLES ± SURFACE ROUGHNESS <input checked="" type="checkbox"/> MAX DO NOT SCALE THIS DRAWING MATERIAL ALUM. ANGLE	APPLICATION DUMP NEXT ASSEMBLY USED ON

UNLESS OTHERWISE SPECIFIED:
 VARIATIONS IN FORM FOR UNMACHINED FEATURES ARE PERMITTED WITHIN ESTABLISHED
 COMMERCIAL STANDARDS. ALL EDGES AND CORNERS .005-.020 (APPROX MAX OR CHAM) -
 ALL FILLETS .005-.020 (APPROX RADIUS) - SCREW THREADS PER ASA B.1 - PIPE THREADS
 PER ASA B.1 - SURFACE ROUGHNESS PER ANSI B.46.1 - SURFACE ROUGHNESS ON HOLES PER

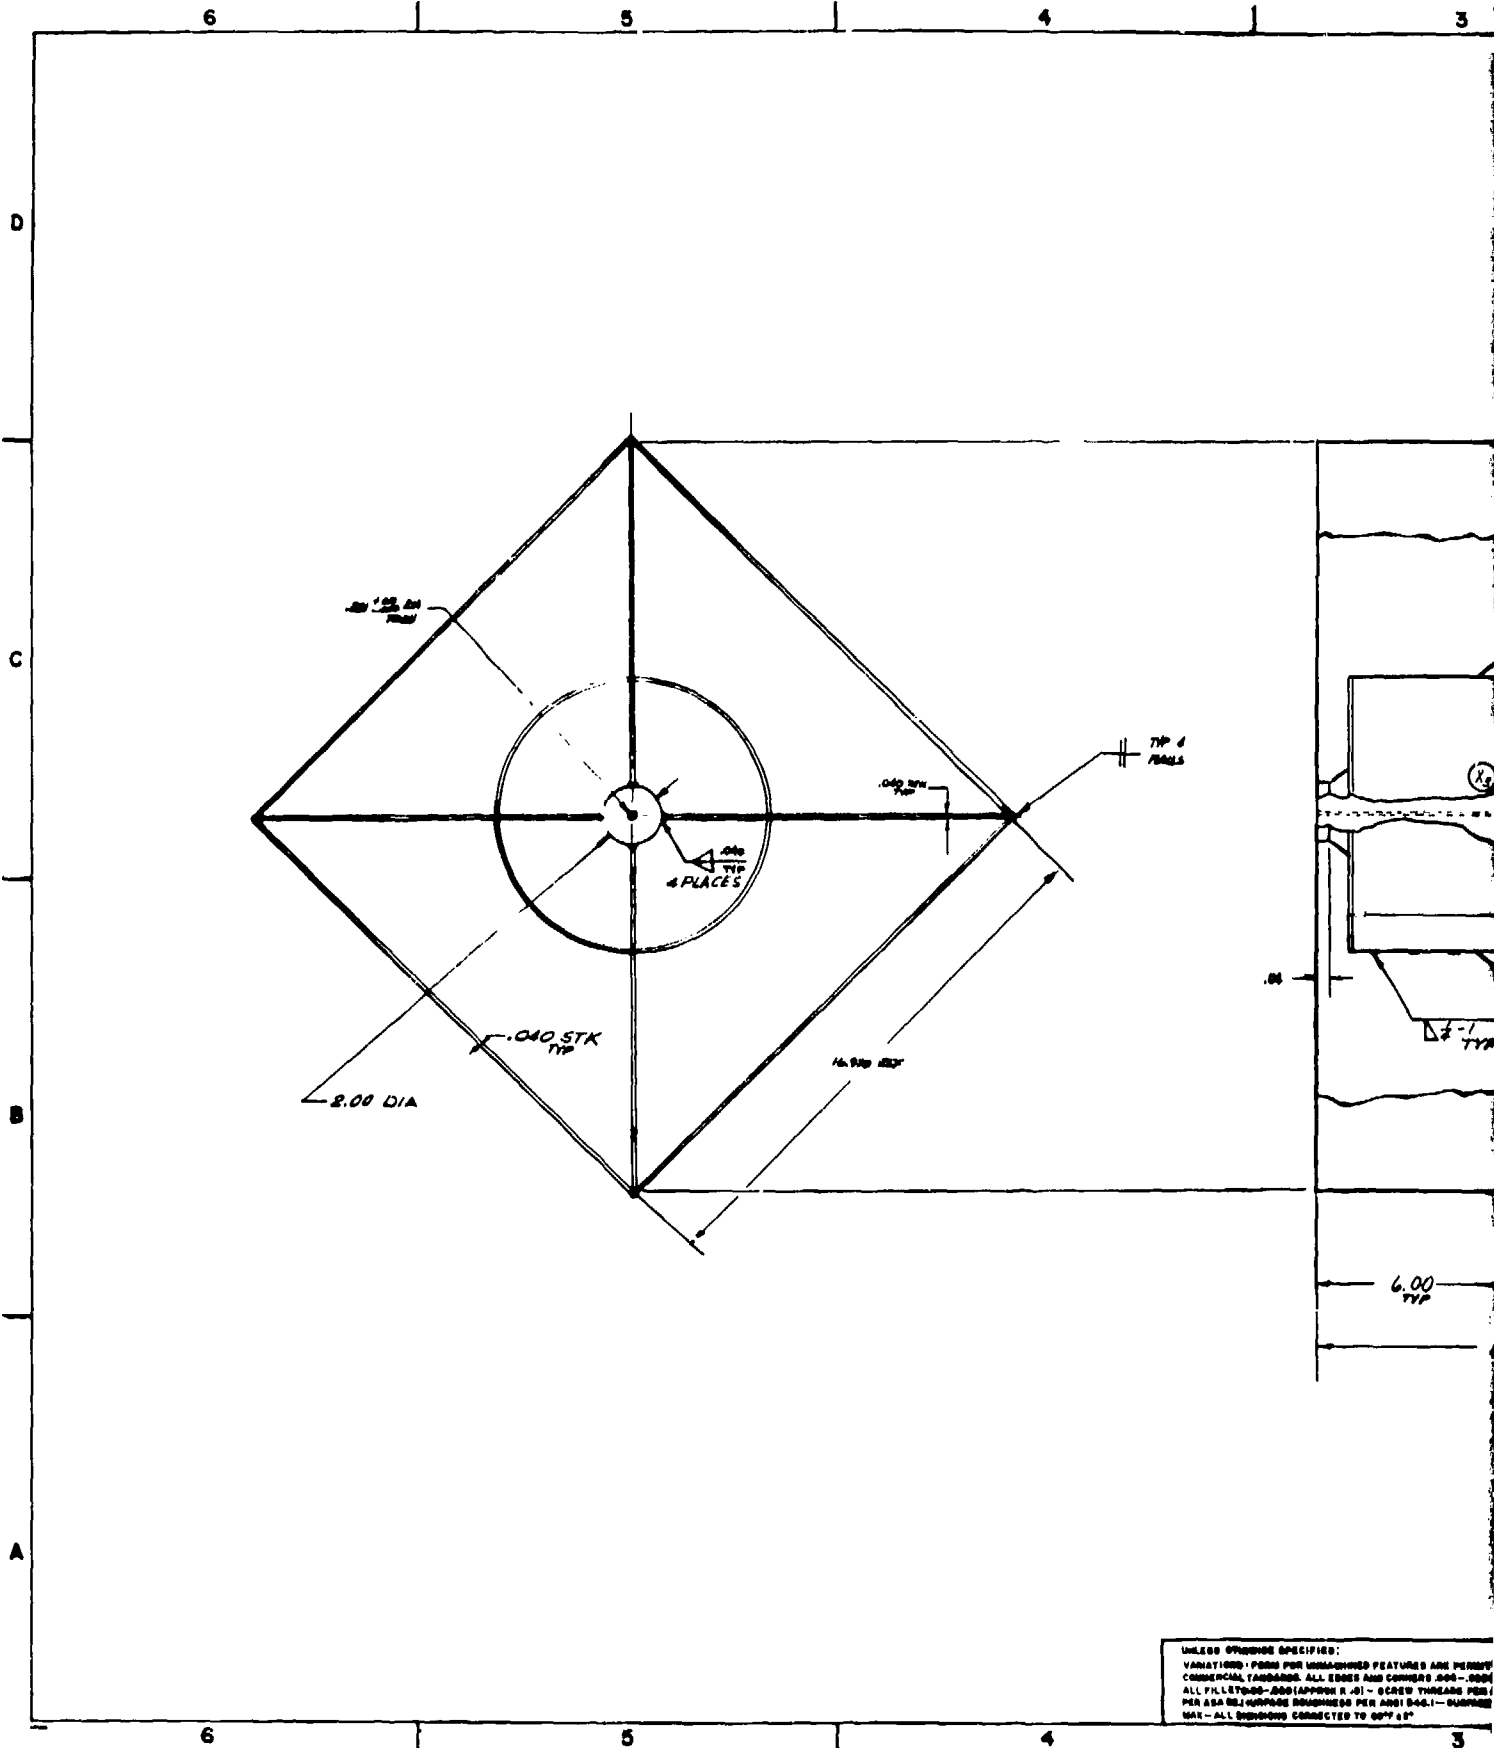

3

2

1

REV	DATE	DESCRIPTION	BY	APP'D
3-B	8-1-68	PRODUCTION ISSUE - REVISED	WJH	WJH
3-C	8-1-68	QUOTES TO 1/2 SCALE	WJH	WJH
3-D	8-1-68	PRODUCTION ISSUE - ADDED	WJH	WJH
3-E	8-1-68	ADJUSTING PRODUCTION STOWAGE	WJH	WJH
3-F	8-1-68	REVISED FOR ADD'l INFORMATION	WJH	WJH

D

C


B

A

450316


NOTES:

☐ MAT'L : ALUM SHEET .040 THK.
1100-N18, 3003-N18 OR 6061-T6

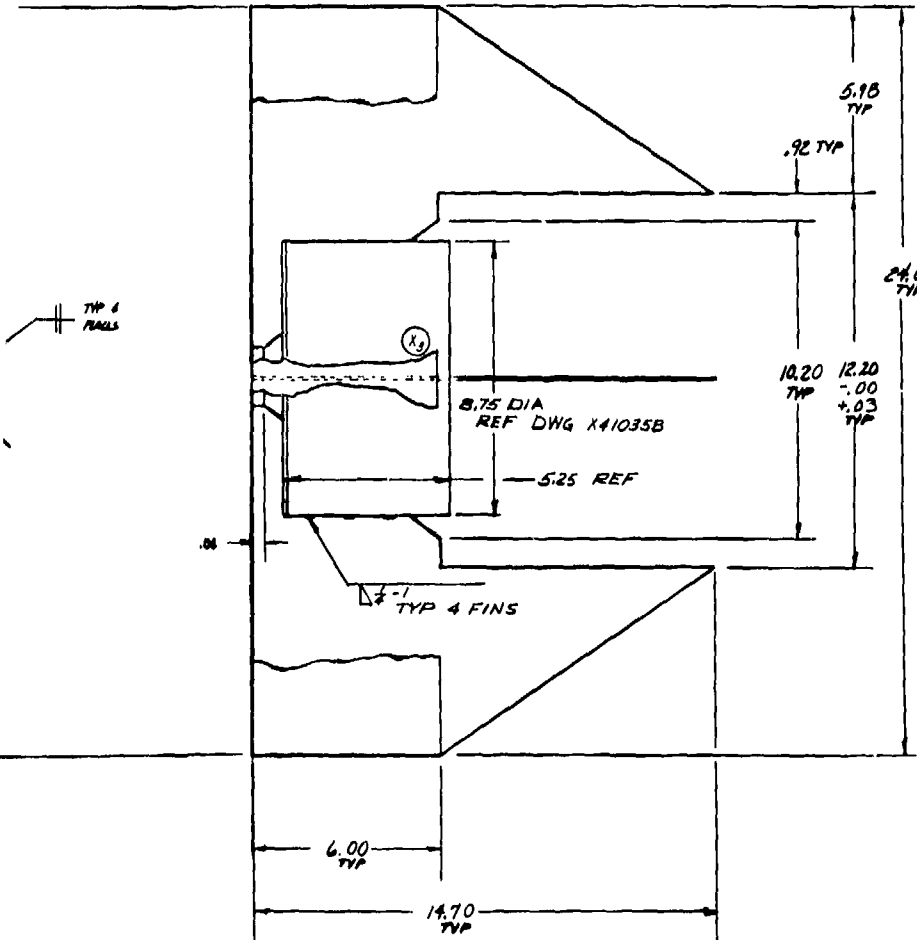

ITEM NO.	QTY REQD.	CODE IDENT.	PART OR IDENTIFYING NO.	DESCRIPTION OR IDENTIFICATION	NOTE	UNIT
				FIN ASSEMBLY DUST CLOUD		
<p>UNLESS OTHERWISE SPECIFIED: VARIATIONS: FINES FOR UNMACHINED FEATURES ARE PERMITTED WITHIN ESTABLISHED COMMERCIAL TOLERANCES. ALL EDGES AND CORNERS .005-.001 APPROX RAD OR CHAMF. ALL FILL TIPS - RADIATING RAS - SCREW THREADS PER ASA B1.1 - PIPE THREADS PER ASA B1.1 SURFACE FINISHES PER ANSI B46.1 - SURFACE FINISHES ON HOLES PER MAX - ALL DIMENSIONS CONNECTED TO 007 ± .02</p>						
<p>APPROVED: <i>[Signature]</i> DATE: 8-1-68</p>				<p>DESIGNED BY: <i>[Signature]</i> DATE: 8-1-68</p>		
<p>APPLICATION: <input type="checkbox"/></p>						<p>REV: 1</p>

2

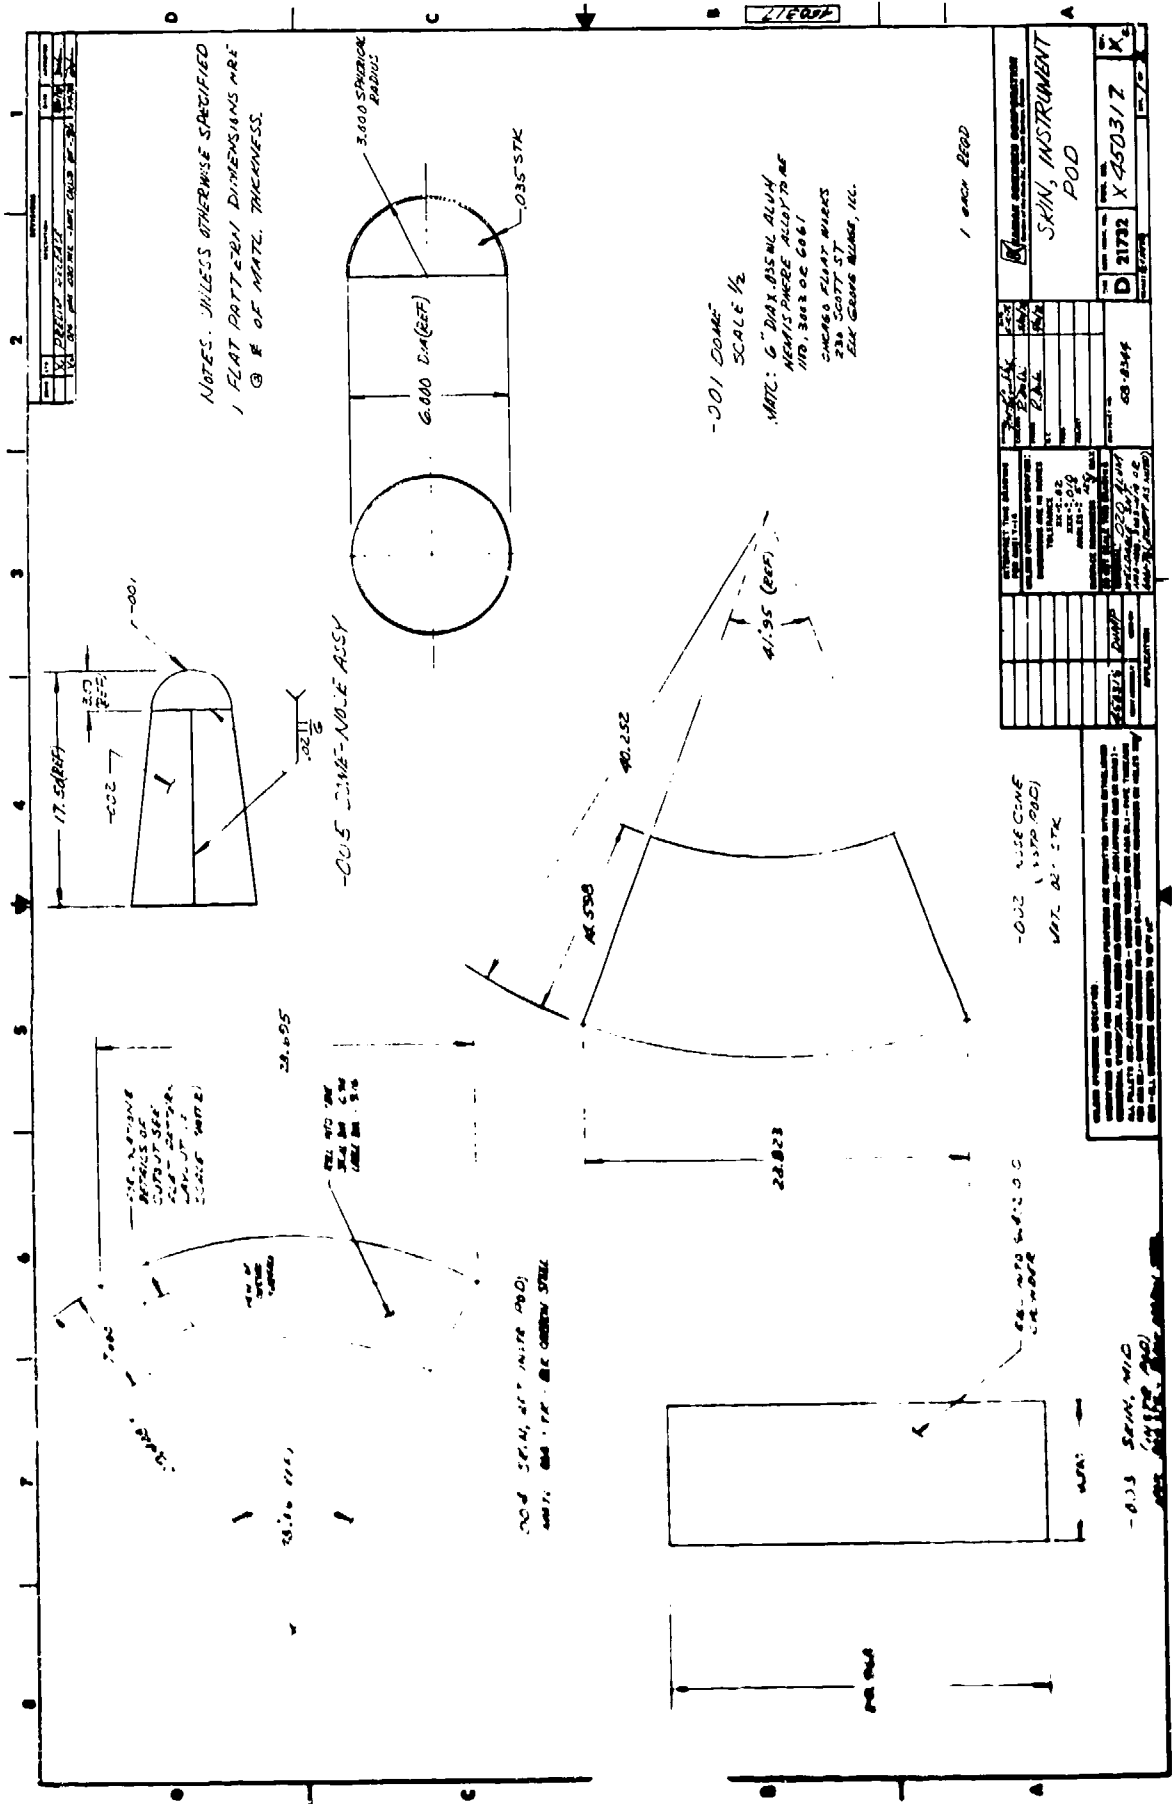

NOTES. UNLESS OTHERWISE SPECIFIED
 1 FLAT PATTERN DIMENSIONS ARE
 @ E OF MATL. THICKNESS.


-001 DOME
 SCALE 1/2
 MATL: 6" DIA X ASSEM. ALUM.
 HONOLULU PHOENIX ACCTO RAE
 HNO. 3002 DC 6061
 CHECKED: ALFRED WIKS
 234 SCOTT ST.
 242 GARDEN GROVE, ILL.

-005 DOME-MOLE ASSY

-002 USE CONE
 (1375.000)
 VET. A2-17K

22.823

-003 SKIN, MILD

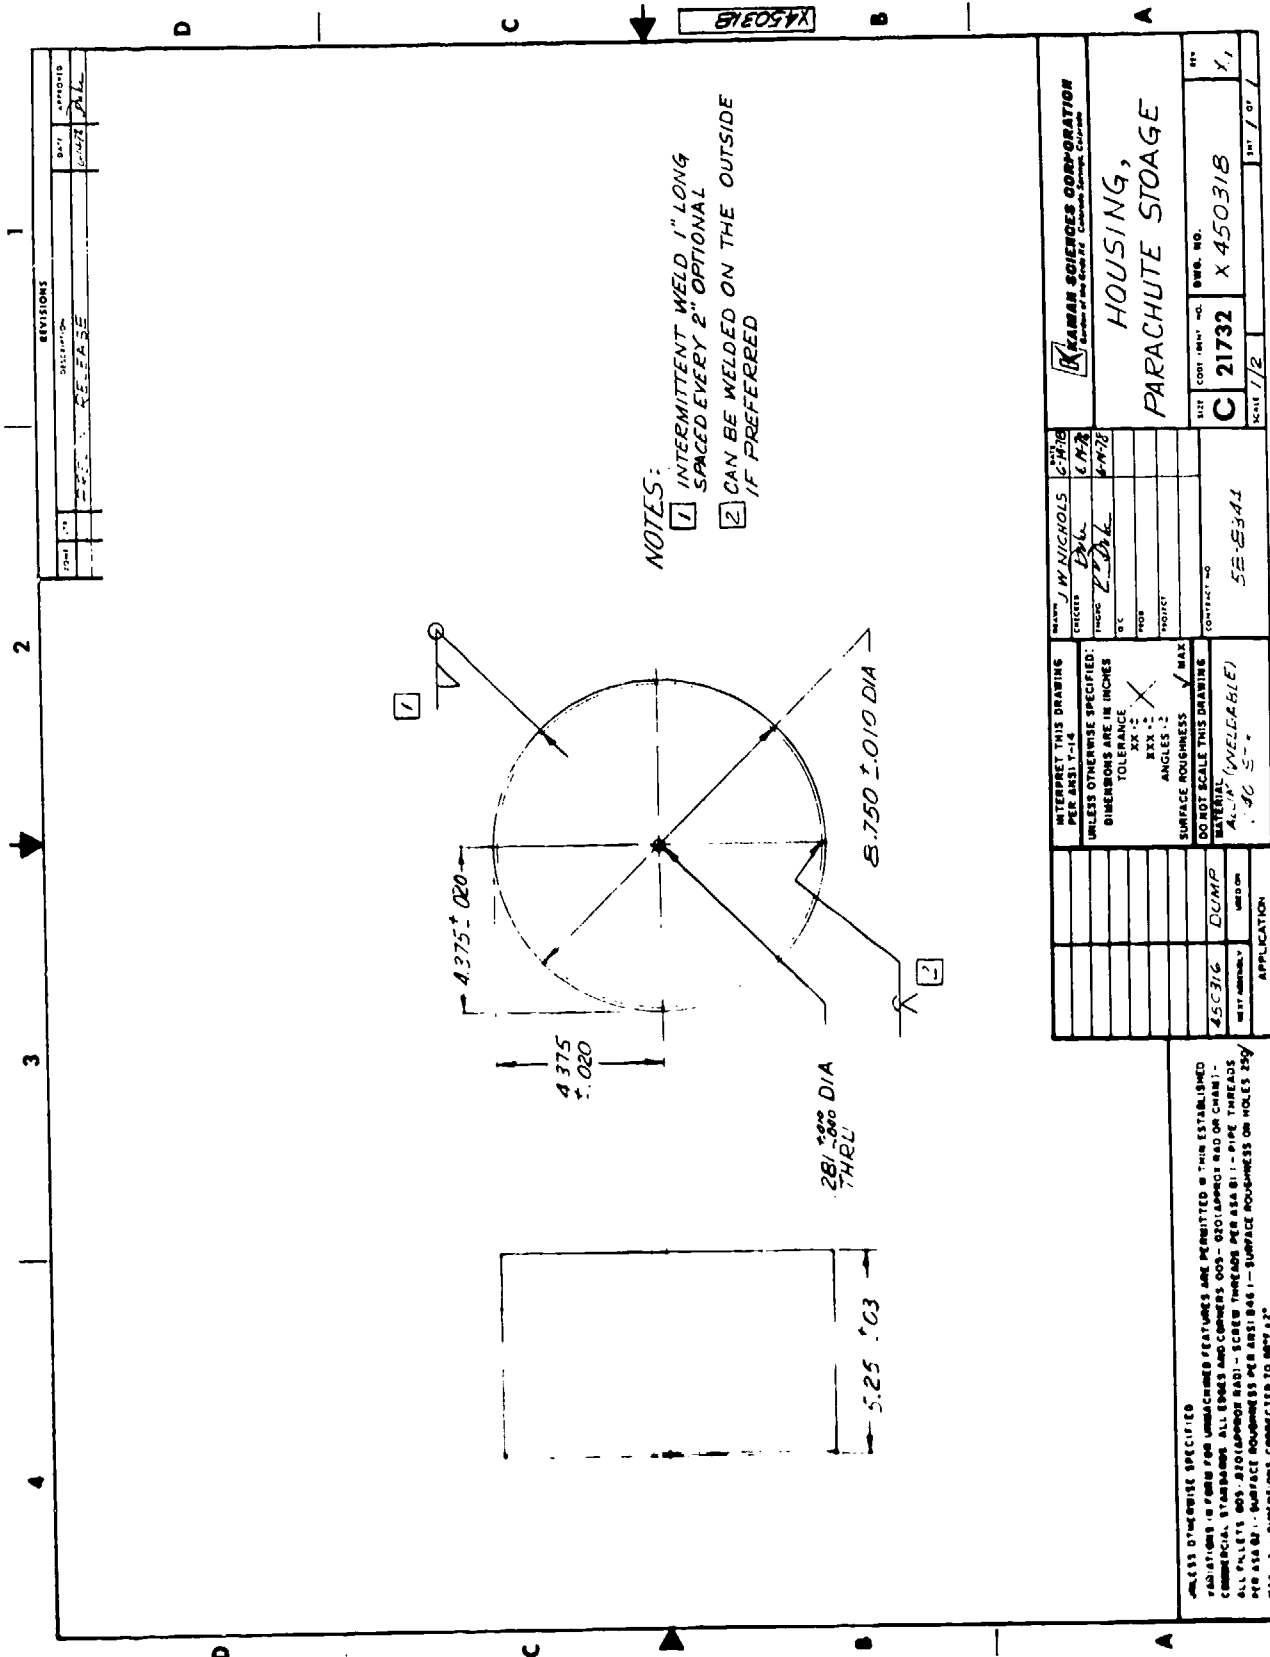


NOTES:
 1 INTERMITTENT WELD 1" LONG SPACED EVERY 2" OPTIONAL
 2 CAN BE WELDED ON THE OUTSIDE IF PREFERRED


REVISIONS		DATE	APPROVED
1	RELEASE	10/22	AL

INTERPRET THIS DRAWING PER ANSI Y-14 UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN INCHES TOLERANCE XX ± .2 XXX ± .5 ANGLES ± .2 SURFACE ROUGHNESS ✓ MAX DO NOT SCALE THIS DRAWING MATERIAL ALUM (WELDABLE) 1.90 S-2		HAWKINS CREATOR DATE 10/22 PROJECT PARACHUTE STORAGE	HAWKINS SCIENCES CORPORATION 10000 HOUSING, PARACHUTE STORAGE
45C316 DUMP UNIDOM	5E-8341 CONTRACT NO	C 21732 QTY 1	SCALE 1/2 1st / of 1

UNLESS OTHERWISE SPECIFIED
 TOLERANCES PER ANSI Y-14 UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES
 TOLERANCE
 XX ± .2
 XXX ± .5
 ANGLES ± .2
 SURFACE ROUGHNESS ✓ MAX DO NOT SCALE THIS DRAWING
 MATERIAL ALUM (WELDABLE) 1.90 S-2

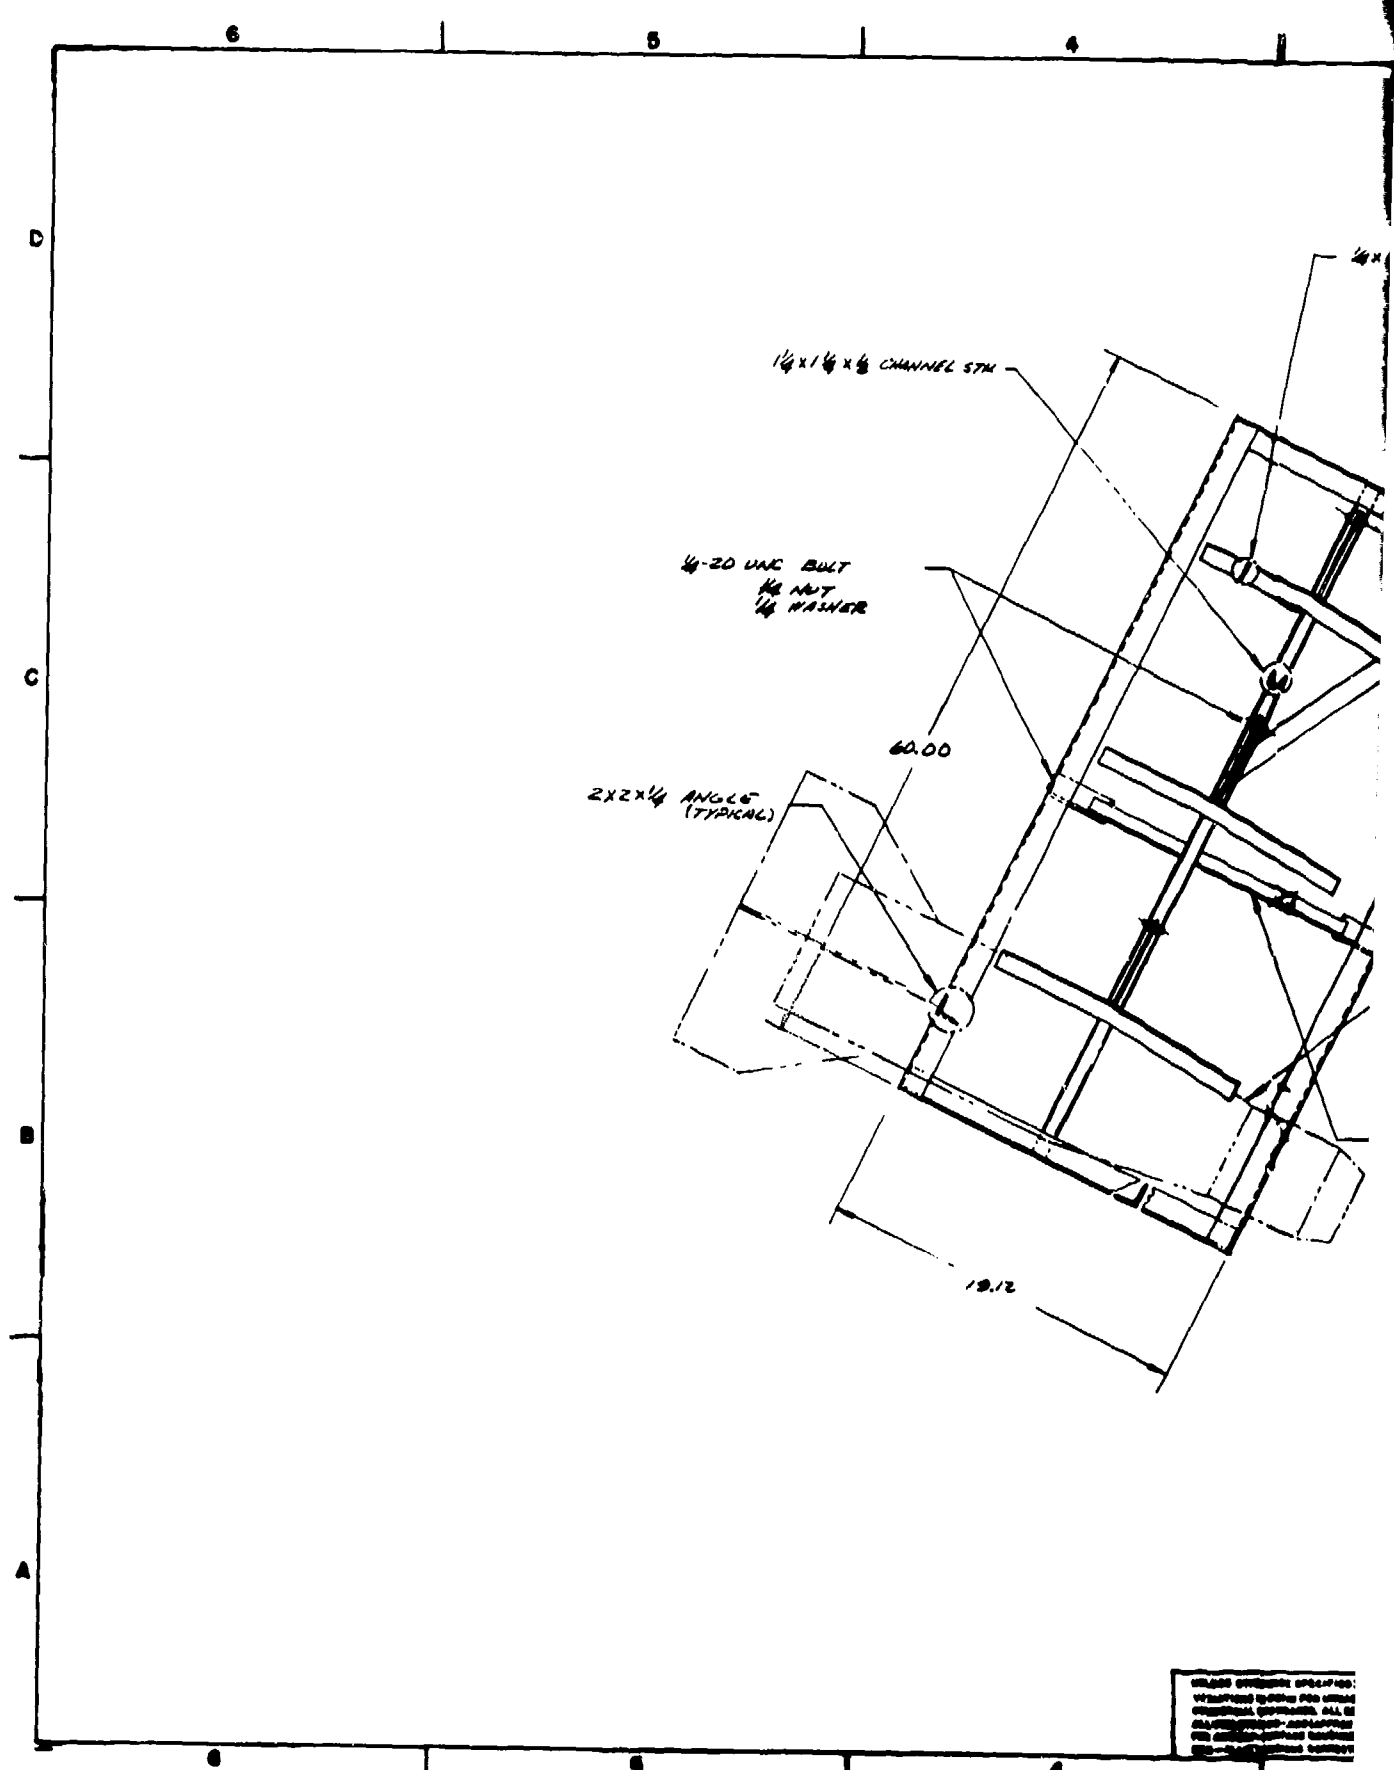

ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED
 ARE IN INCHES AND DECIMALS THEREOF. ALL DIMENSIONS
 ARE TO BE TAKEN TO THE CENTER UNLESS OTHERWISE SPECIFIED.

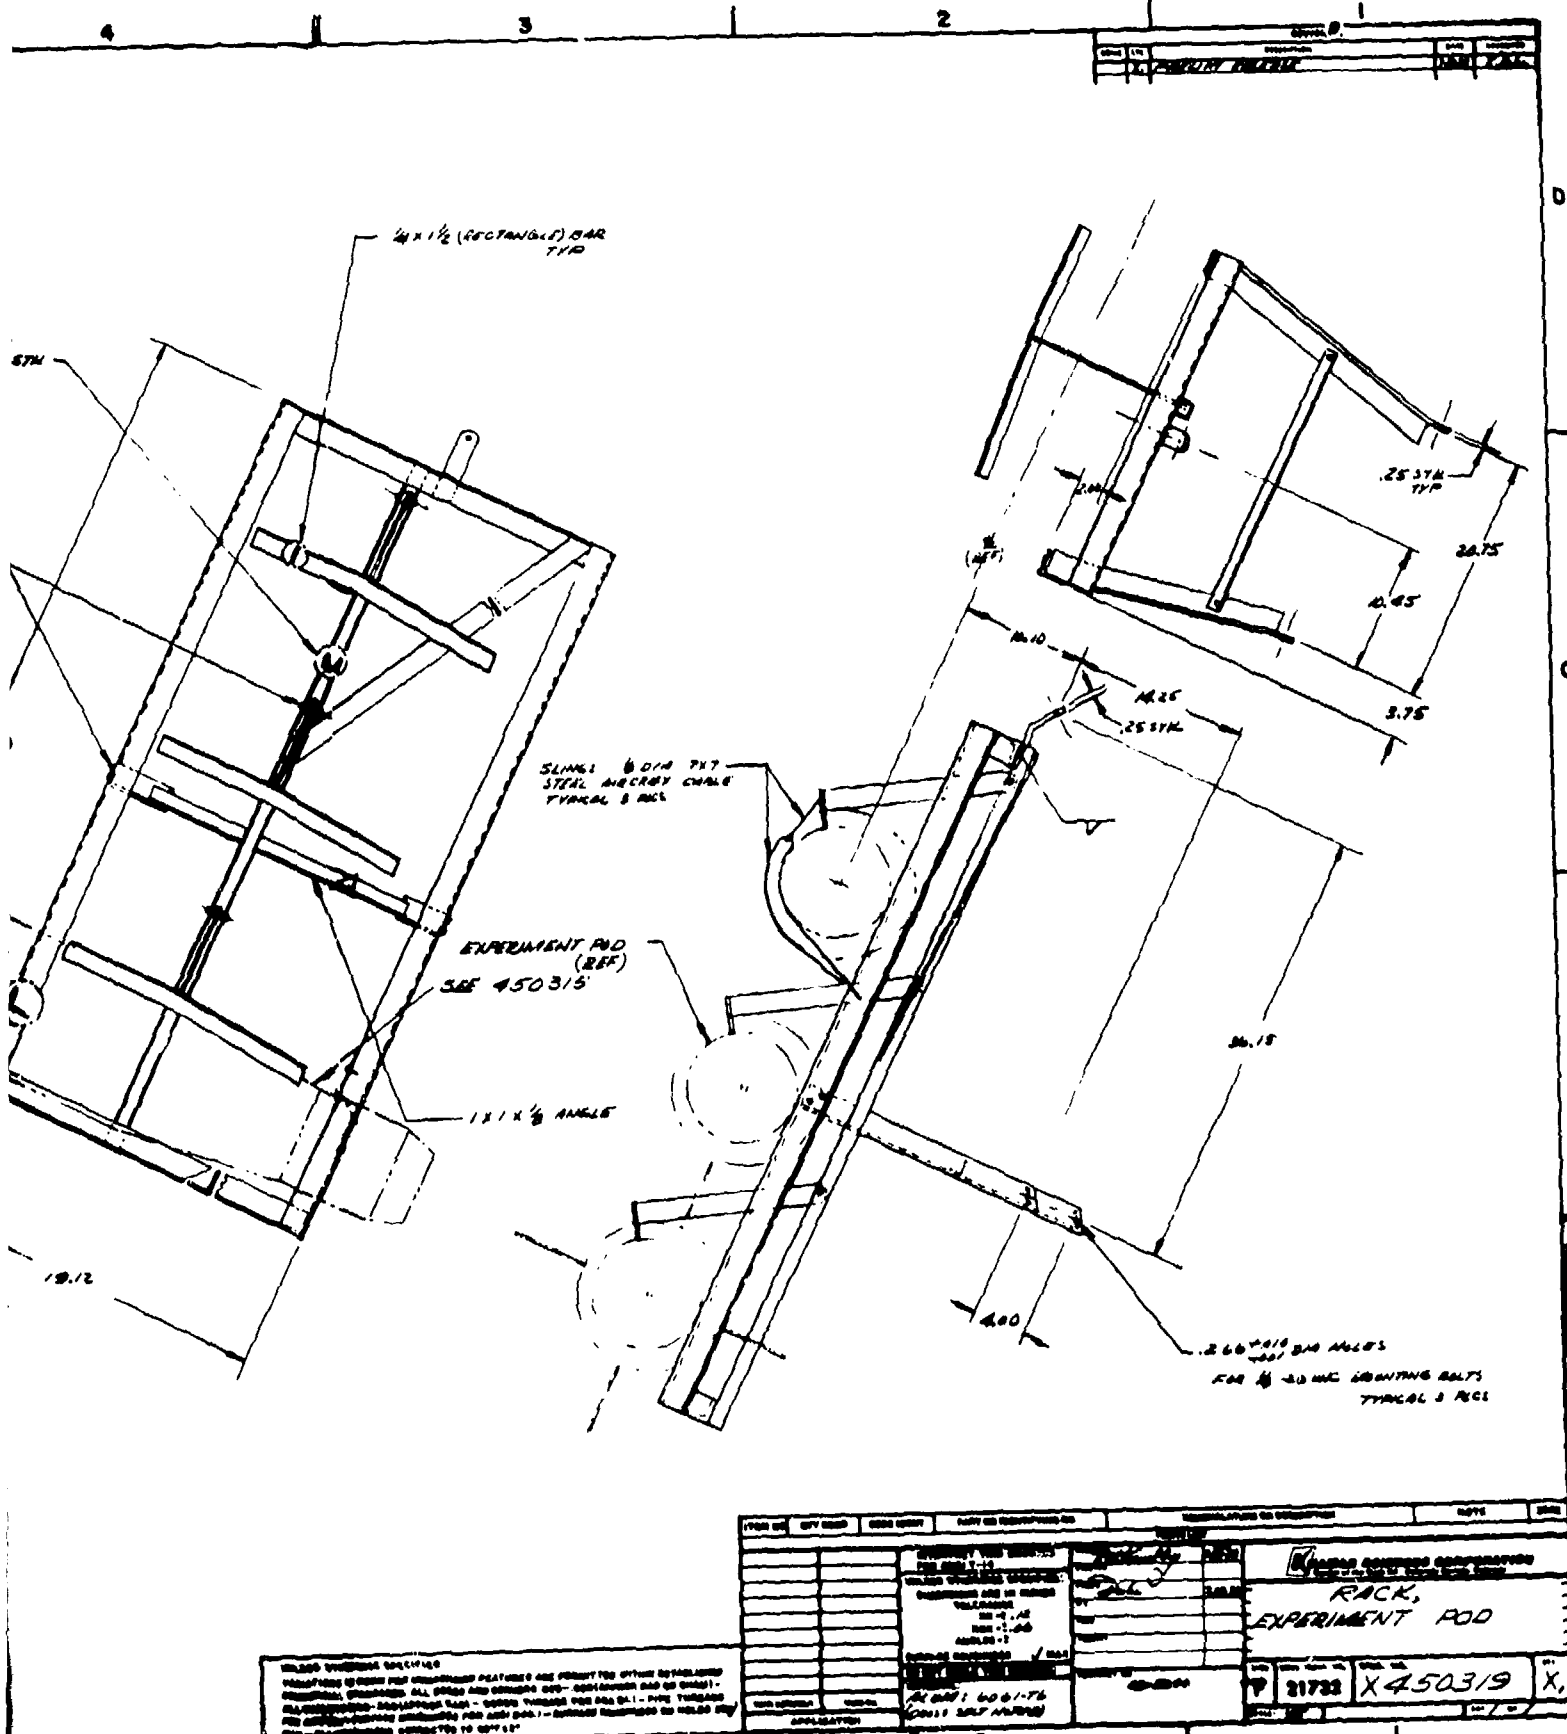

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES
 DIMENSIONS IN PARENTHESES ARE FOR OTHER DETAILS
 UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE TO CENTER UNLESS OTHERWISE NOTED
 DIMENSIONS TO SURFACE UNLESS OTHERWISE NOTED
 DIMENSIONS TO EDGE UNLESS OTHERWISE NOTED
 DIMENSIONS TO CORNER UNLESS OTHERWISE NOTED
 DIMENSIONS TO FACE UNLESS OTHERWISE NOTED
 DIMENSIONS TO CENTERLINE UNLESS OTHERWISE NOTED
 DIMENSIONS TO CENTERLINE UNLESS OTHERWISE NOTED

ITEM NO.	QTY	DESCRIPTION	REVISIONS	DATE
		EXPERIMENT POD		
		RACK, EXPERIMENT POD		
		X 450319		

N

APPENDIX B

Memorandum "Safety of Hiller UH-12E in MISERS BLUFF 1"
to Dr. Frank Shelton from Dr. N. Hobbs and G. Zartarian, on
June 21, 1978.

PRECEDING PAGE BLANK-NOT FILLED

DATE: 21 June 1978

TO: DNA, Mr. James F. Moulton, Jr., SPAS
FROM: Frank H. Shelton, KSC

Please note following message to F. Shelton from Avidyne.

TO: Dr. Frank Shelton
FROM: Dr. N. Hobbs, G. Zartarian
SUBJECT: Safety of Hiller UH-12E in MISERS BLUFF 1
DATE: June 21, 1978

We have addressed the question of the safety of the Hiller UH-12E helicopter hovering over ground zero in MISERS BLUFF 1 at an altitude corresponding to a shock overpressure of 0.2 psi. We have obtained some data on the UH-12E from Mr. Samuel Brodie, Chief Engineer for Hiller Aviation.

Due to time restrictions and limited data available, we have had to employ simple analysis methods and engineering judgment rather than applying more sophisticated methods. We have looked at the rotor system and the plexiglass bubble (for which we have virtually no data), which we should expect to be the two most vulnerable components of the UH-12E. As a result of our brief analyses, it is our opinion that the UH-12E is indeed safe at the specified conditions. We believe that the HU-12E has an adequate margin of safety to cope with uncertainties with regard to the expected shock overpressure and the analysis tools used.

On the basis of our cursory examination, we would not be willing to approve of a higher overpressure level for MISERS BLUFF1. We suspect, however, that a more detailed analysis of

the UH-12E would result in our accepting a higher overpressure as safe, due to increased confidence in the analysis. We suggest that a more detailed analysis be conducted if it turns out to be desirable to clear UH-12E to a higher overpressure level for MISER BLUFF 2.

DISTRIBUTION LIST

DEPARTMENT OF DEFENSE

All copies to the Secretary of Defense
 Attn: [unclear]

ATTN: [unclear]

Defense Acquisition [unclear] Agency
 ATTN: [unclear]

ATTN: [unclear]

Defense [unclear] Agency
 ATTN: [unclear]

ATTN: [unclear]

Defense [unclear] Agency
 ATTN: [unclear]

ATTN: [unclear]

Defense [unclear] Agency
 ATTN: [unclear]

ATTN: [unclear]

Defense [unclear] Agency
 ATTN: [unclear]

ATTN: [unclear]

ATTN: [unclear]

ATTN: [unclear]

ATTN: [unclear]

ATTN: [unclear]

ATTN: [unclear]

Defense Technical Information Center

12 cy ATTN: [unclear]

Field Command

Defense Nuclear Agency

ATTN: FCTMOT

ATTN: FCPR

ATTN: FCTMDF

ATTN: FCTMD

Field Command

Defense Nuclear Agency

Livermore Division

ATTN: FCPRL

Joint Chiefs of Staff

ATTN: SAGA/SFD

ATTN: SAGA/SSD

ATTN: J-5, Nuclear Division

ATTN: J-5, Force Planning & Program Div.

Joint Strat. Tgt. Planning Staff

ATTN: JPTM

ATTN: JLT. 2

ATTN: JPST

ATTN: JLA

ATTN: JPST, G. Burton

NATO School (SHAPE)

ATTN: U.S. Documents Officer

Undersecretary of Defense for Rsch. & Engrg.

ATTN: Engineering Technology, J. Persh

ATTN: Strategic & Space Systems (OS)

DEPARTMENT OF THE ARMY

BMD Advanced Technology Center

Department of the Army

ATTN: ATC-1, M. Capps

DEPARTMENT OF THE ARMY (Continued)

IBM Systems Division

Department of the Army

ATTN: [unclear]

IBM Systems Division

Department of the Army

ATTN: [unclear]

IBM Systems Division

Department of the Army

ATTN: [unclear]

IBM Systems Division

Department of the Army

ATTN: [unclear]

ATTN: [unclear]

ATTN: [unclear]

Army Ballistic Research Labs.

ATTN: DRDAR-BL

ATTN: DRDAR-BL, J. Fraser

ATTN: DRDAR-BL, W. Eichelberger

ATTN: DRDAR-BL, P. Vitale

ATTN: DRDAR-BL, W. Schuman, Jr.

ATTN: DRDAR-BLE, J. Keefer

U.S. Army Material & Mechanics Rsch. Ctr.

ATTN: DRAMR-HH, J. Dignan

U.S. Army Materiel Dev. & Readiness Cmd.

ATTN: DRCDE-D, L. Flynn

U.S. Army Missile Command

ATTN: DRDMI-TRR, B. Gibson

ATTN: DRSMI-RKP, W. Thomas

ATTN: DRDMI-XS

U.S. Army Nuclear & Chemical Agency

ATTN: Library

U.S. Army Research Office

ATTN: P. Radowski, Consultant

U.S. Army TRADOC Systems Analysis Activity

ATTN: ATAA-TDC, R. Benson

DEPARTMENT OF THE NAVY

Naval Research Laboratory

ATTN: Code 2627

ATTN: Code 6770, G. Cooperstein

ATTN: Code 7908, A. Williams

Naval Sea Systems Command

ATTN: SEA-0352, M. Kinna

Naval Surface Weapons Center

ATTN: Code R15, J. Petes

ATTN: Code K06, C. Lyons

ATTN: Code F31

Naval Weapons Evaluation Facility

ATTN: P. Hughes

ATTN: L. Oliver

DEPARTMENT OF THE ARMY (Continued)

Office of Naval Research
ATTN: [unreadable]

Office of the Chief of Naval Operations
ATTN: [unreadable]
ATTN: [unreadable]
ATTN: [unreadable]

Strategic Systems Project Office
Department of the Army
ATTN: [unreadable]
ATTN: [unreadable]
ATTN: [unreadable]

DEPARTMENT OF THE AIR FORCE

Aeronautical Systems Division
Air Force Systems Command
2 cy ATTN: ASD/ENTG, Howard

Air Force Flight Dynamics Laboratory
ATTN: FIG
ATTN: FBAC, D. Roselius

Air Force Geophysics Laboratory
ATTN: LY, C. Touart

Air Force Materials Laboratory
ATTN: MBE, G. Schmitt
ATTN: MBC, D. Schmidt
ATTN: LLM, T. Nicholas

Air Force Rocket Propulsion Laboratory
ATTN: LKCP, G. Beale

Air Force Systems Command
ATTN: SOSS
ATTN: XRTO

Air Force Technical Applications Center
ATTN: TF

Air Force Weapons Laboratory
Air Force Systems Command
ATTN: DYV, A. Sharp
ATTN: DYS
ATTN: DYT
ATTN: DYV
ATTN: NTES, K. Filippelli
ATTN: SUL
ATTN: HO, W. Minge
ATTN: DYV, E. Copus
ATTN: DYV, D. Newlander
2 cy ATTN: NTO

Arnold Engineering Development Center
Air Force Systems Command
ATTN: Library Documents
ATTN: DOOP, G. Cowley

Ballistic Missile Office
Air Force Systems Command
ATTN: MNN
ATTN: MNNR
ATTN: MNNH
3 cy ATTN: MNNH, M. Baran

DEPARTMENT OF THE AIR FORCE (Continued)

Deputy Chief of Staff
Operations Plans and Logistics
Department of the Air Force
ATTN: [unreadable]

Deputy Chief of Staff
Research, Development, & Test
Department of the Air Force
ATTN: [unreadable]
ATTN: [unreadable]

Foreign Technology Division
Air Force Systems Command
ATTN: [unreadable]
ATTN: [unreadable]
ATTN: [unreadable]

Headquarters Space Division
Air Force Systems Command
ATTN: [unreadable]

Headquarters Space Division
Air Force Systems Command
ATTN: AFML, G. Kirshner

Headquarters Space Division
Air Force Systems Command
ATTN: RST
ATTN: RSS
ATTN: RSSE

Strategic Air Command
Department of the Air Force
ATTN: DOXT
ATTN: XOBM
ATTN: XPQM
ATTN: XPFS

DEPARTMENT OF ENERGY

Department of Energy
ATTN: OMA/RD&T

DEPARTMENT OF ENERGY CONTRACTORS

Lawrence Livermore National Laboratory
ATTN: L-262, J. Knox
ATTN: L-125, J. Keller
ATTN: L-92, C. Taylor
ATTN: L-24, G. Stahle

Los Alamos National Scientific Laboratory
ATTN: R. Dingus
ATTN: J. Taylor
ATTN: R. Thurston
ATTN: D. Kerr
ATTN: J. McQueen
ATTN: R. Skaggs

Sandia National Laboratories
Livermore Laboratory
ATTN: H. Norris, Jr.
ATTN: T. Cook
ATTN: Library & Security Classification Div.

DEPARTMENT OF DEFENSE CONTRACTORS (Continued)

General Electric Co.
ATTN: W. [unclear]
ATTN: E. [unclear]
ATTN: [unclear]

DEPARTMENT OF DEFENSE CONTRACTORS

Aerospace Corp.
ATTN: J. [unclear]
ATTN: [unclear]
ATTN: [unclear]

Aerogel Solid Production Co.
ATTN: [unclear]

Aeronautical Resch. Assoc. of Princeton, Inc.
ATTN: C. Donaldson

Aerospace Corp.
ATTN: D. Glenn
ATTN: H. Blaes
ATTN: J. McClelland
ATTN: W. Barry
ATTN: R. Crollius

Analytic Services, Inc.
ATTN: J. Selig

APTEK
ATTN: T. Meagher

AVCO Research & Systems Group
ATTN: J. Gilmore
ATTN: Document Control
ATTN: A. Pallone
ATTN: W. Broding
ATTN: J. Stevens
ATTN: W. Reinecke

Battelle Memorial Institute
ATTN: E. Unger
ATTN: M. Vanderlind
ATTN: R. Castle

Boeing Co.
ATTN: R. Holmes
ATTN: R. Dyrdaht
ATTN: B. Lempriere
ATTN: M/S 85/20, E. York

Boeing Wichita Co.
ATTN: T. Swaney

California Research & Technology, Inc.
ATTN: K. Kreyenhagen
ATTN: M. Rosenblatt

Calspan Corp.
ATTN: M. Holden

Effects Technology, Inc.
ATTN: R. Parisse
ATTN: R. Wengler

General Electric Co.
ATTN: D. Edelman
ATTN: C. Anderson
ATTN: G. Harrison

DEPARTMENT OF DEFENSE CONTRACTORS (Continued)

General Electric Co.
ATTN: [unclear]
ATTN: E. [unclear]

General Electric Company (EMPI)
ATTN: [unclear]
ATTN: E. [unclear]

General Research Corp.
ATTN: T. Stathacopoulos

General Research Corp.
ATTN: R. Patricia

Harold Rosenbaum Associates, Inc.
ATTN: G. Weber

Hercules, Inc.
ATTN: P. McAllister

Institute for Defense Analyses
ATTN: J. Bengston
ATTN: Library

ION Physics Corp.
ATTN: R. Evans

Kaman Avidyne
ATTN: E. Criscione
ATTN: N. Hobbs
ATTN: R. Ruetenik

Kaman Sciences Corp.
ATTN: J. Hoffman
ATTN: J. Harper
ATTN: D. Sachs
ATTN: F. Shelton
ATTN: J. Keith

Lockheed Missiles & Space Co., Inc.
ATTN: F. Borgardt

Lockheed Missiles & Space Co., Inc.
ATTN: R. Walz
ATTN: A. Collins

Martin Marietta Corp.
ATTN: J. Potts
ATTN: L. Kinnaid
ATTN: G. Aiello

Martin Marietta Corp.
ATTN: E. Strauss

McDonnell Douglas Corp.
ATTN: E. Fitzgerald
ATTN: J. Baribotti
ATTN: H. Berkowitz
ATTN: L. Cohen
ATTN: H. Hurwicz
ATTN: D. Dean
ATTN: P. Lewis, Jr.
ATTN: G. Johnson
ATTN: R. Reck

National Academy of Sciences
ATTN: D. Groves

DEPARTMENT OF DEFENSE CONTRACTORS (Continued)

Northrop Corp.
ATTN: J. Hill

Palmer Research Corp.
ATTN: J. Yocco
ATTN: J. Lang

Phytis International Co.
ATTN: J. Jones

Prototype Development Associates, Inc.
ATTN: J. Dunn
ATTN: M. Herman
ATTN: J. McDonald

R. F. D. Associates
ATTN: P. Rausch
ATTN: C. MacDonald
ATTN: W. Graham, Jr.
ATTN: F. Field
ATTN: J. Carpenter
ATTN: P. Haas

Rand Corp.
ATTN: J. Mate
ATTN: R. Rapp

Rockwell International Corp.
ATTN: G. Perrone

Science Applications, Inc.
ATTN: O. Nance
ATTN: D. Hove
ATTN: J. Stoddard
ATTN: W. Yengst
ATTN: G. Ray
ATTN: J. Warner

Science Applications, Inc.
ATTN: G. Burghart

Science Applications, Inc.
ATTN: A. Martellucci

Science Applications, Inc.
ATTN: J. Cockayne
ATTN: W. Layson
ATTN: W. Seebaugh

DEPARTMENT OF DEFENSE CONTRACTORS (Continued)

Southern Research Institute
ATTN: J. Feart

SPI International:
ATTN: J. Sulan
ATTN: J. Lindberg
ATTN: D. Curran
ATTN: S. Abrahamson

System Planning Corp.
ATTN: F. Adelman

Systems, Science & Software, Inc.
ATTN: R. Luff
ATTN: G. Gurtman

Terra Tek, Inc.
ATTN: S. Green

Thiokol Corp.
ATTN: W. Shoun

TRW Defense & Space Sys. Group
ATTN: A. Zimmerman
ATTN: T. Mazzola
ATTN: M. King
ATTN: A. Ambrosio
ATTN: D. Baer
ATTN: R. Plebuch
ATTN: W. Wood
ATTN: T. Williams
ATTN: P. Brandt
ATTN: G. Arenguren
2 cy ATTN: I. Alber

TRW Defense & Space Sys. Group
ATTN: W. Polich
ATTN: V. Blankenship
ATTN: E. Wong
ATTN: E. Allen
ATTN: L. Berger
ATTN: P. Dai