

AD-A244 282

e040 064

2



Ocean Simulation Model for Internal Waves

DTIC
S
C
D

K. D. Saunders
S. A. Briggs
Oceanography Division
Ocean Science Directorate

D. Rubenstein
Science Applications International Corporation
McLean, Virginia

91-08587




Approved for public release; distribution is unlimited. Naval Oceanographic and Atmospheric Research Laboratory, Stennis Space Center, Mississippi 39529-5004.

91 8 22 01

Foreword

The effects of the oceanic environment on acoustic propagation, sensor systems, and weaponry have become widely recognized as important in prosecuting modern naval warfare. Cost and time are prohibitive for conducting field experiments to measure these effects under all the conditions that should be expected. Simulation models of the oceanic environment can produce realistic data approximations that can be used in designing and testing systems and tactics. This report describes the first ocean simulation model developed at the Naval Oceanographic and Atmospheric Research Laboratory and provides potential users with the details necessary to implement and operate the model.



W. B. Moseley
Technical Director



J. B. Tupaz, Captain, USN
Commanding Officer

Executive Summary

Oceanographic simulation models are valuable tools for imitating temperature, salinity, density, sound velocity, and other environmental areas of naval interest. The Naval Oceanographic and Atmospheric Research Laboratory was tasked to implement and operate ocean simulation models. This manual presents the theoretical foundations for the first version of the model, the details of the primary model's structure, and the computer programs and instructions for implementing and using the model.

The first version of the model was based on the premise that the most important features of interest to the Navy are produced by internal waves. Subsequent versions of the model will incorporate variability produced by shear, fronts, mixed-layer processes and turbulent mixing. A full three-dimensional, time-varying model is expected in about 3 years.



Accession for	
DTIC TAB	
Unannounced	
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or
A-1	Special

Acknowledgments

This work was supported by Program Element 602435N, under the direction of CDR Lee Bounds, Office of Naval Technology.

The authors gratefully acknowledge Drs. Albert Green, Melvin Briscoe, Rudy Hollman, Lewis Dozier, Steven Borchardt, Michael Gregg, Terry Ewart, Chris Garrett, and Eric D'Asaro, whose comments, advice, and support contributed to the development of the first version of the ocean simulation model.

The mention of commercial products or the use of company names does not in any way imply endorsement by the U.S. Navy or NOARL.

Contents

I. Introduction	1
A. Background	1
B. Project Objectives	1
C. Purpose of This Manual	1
II. Background and Derivation of Algorithms	2
A. Stochastic Representation of Internal Wave Field	2
B. Plotting/Interpolation Methods	6
C. Export Algorithm	6
III. Numerical Methods	6
A. Eigenfunction Calculations	6
B. Integration Method	6
C. Choice of Integration Subintervals	6
D. Problem of Probability Distribution Due to Finite Summation	7
IV. System and Program Structure	7
A. System Structure	7
B. Program Structure	8
C. Data Structures	8
V. Usage	9
A. VMS (DEC-VAX)	10
B. UNIX	10
C. MS-DOS	10
D. Program Input Prompt Descriptions	10
E. Sample Program Execution	11
F. General Description	11
VI. Conclusions	22
VII. Recommendations	22
VIII. References	22
Appendix. Structure and Layer Diagrams	23

Ocean Simulation Model for Internal Waves

I. Introduction

A. Background

Over the past two decades, acousticians have realized that acoustic propagation is greatly affected by the variability in the internal wave field and by the variability of currents and sound velocity on the larger scales of fronts and eddies, (Flatté and Tappert, 1975; Dyson et al., 1976; Desaubies, 1976a, 1976b, 1978; Ewart, 1980, 1989; Macaskill and Ewart, 1984). This significant discovery led to the need to obtain simulations of oceanic density, current, and sound velocity fields. One method for studying the acoustic fluctuations relies on a direct simulation of the ocean environment. A statistical model of the environment can also be directly incorporated into an acoustic model.

Simulations are used to model the performance of proposed instruments, often before these instruments are designed or constructed. This type of modeling is particularly useful when the instrument senses or processes the signal nonlinearly. Use of such simulations can save time and money in the design and construction of sensor systems.

Oceanographic simulations also have great potential utility in designing sampling strategies for hydrographic surveys. A field of simulated data can be easily constructed and one sampling method tested against another. Proper application of this type of testing, if conducted prior to a cruise, could save several days of ship time per cruise.

An ocean simulation model can be defined as a method (an algorithm implemented on a computer) that will provide a representation of a set of fields of oceanic variables over a given space-time domain at a specified resolution. The algorithm can simply be a method for searching a data base, or it can employ sophisticated methods for generating stochastic fields with specified statistics.

B. Project Objectives

The Naval Oceanographic and Atmospheric Research Laboratory (NOARL) was tasked to develop

and test a sequence of simulation models for the ocean simulation project. The end product will be the capability to simulate temperature, salinity, density, sound velocity, and current fields in any ocean region over any reasonable time and space domain and resolution. The simulations are intended for use by the acoustics and oceanographic community to provide a well-defined testbed for evaluating environmental effects on acoustic systems, and by the weapons design, nonacoustic ASW and oceanographic communities for similar purposes.

The first version of the simulation model is based on the premise that the features important to the Navy are produced by internal waves. These waves typically have periods between 15 minutes and 24 hours and horizontal wavelengths on the order of tens of meters to tens of kilometers. The waves vertically advect constant density surfaces to produce time- and space-varying fields of temperature, salinity, and sound speed.

Subsequent versions of the simulation model will incorporate variability produced by shear, fronts, mixed layer processes, and turbulent mixing. A full three-dimensional, time-varying model is expected in about 3 years.

C. Purpose of this Manual

This manual provides the simulation model user with information that will assist in understanding the theoretical and numerical bases for the simulation, the details of program structure needed for implementation and maintenance, and provides instructions for using the program suite to generate simulations. This manual describes the algorithms used in the simulation and discusses some of the less obvious numerical methods. The details of the program structure are presented and a guide to program operation follows. The program codes are listed in NOARL Technical Note No. 059. ASCII source code can be obtained from NOARL's Physical Oceanography Branch on 5¼-inch diskette or ½-inch magnetic tape. For copies, please write to: Commanding Officer,

II. Background and Derivation of Algorithms

A. Stochastic Representation of Internal Wave Field

Internal Waves. The internal wave field is composed of motions in the frequency band between the inertial frequency, f , and the Brunt-Väisälä frequency N . (Strictly speaking, this is the band in which freely propagating internal waves are permitted—forced or evanescent internal waves can exist outside this frequency band.) The sobriquet, internal waves, also implies the existence of a dispersion relation, relating wave frequency to wavenumber.

The best known (and most widely used) model of the internal wave field was first formulated by Garrett and Munk (1972). This model is based on an exponential approximation to the Brunt-Väisälä frequency profile and an approximate fit to observed spectra and cross spectra of density and velocity fields.

Tides. After internal waves, the tides are the second most important sources of rapid fluctuations in the ocean. They can be decomposed into a barotropic and baroclinic component. These have widely separated length scales. The barotropic tide has an extremely large length scale when compared to the internal (baroclinic) tide.

Barotropic Tide. The barotropic tide has such long horizontal length scales, that for most of our modeling effort, it may be taken as constant or slowly varying horizontally and uniform vertically. The tidal current vectors trace out an ellipse in the horizontal plane over a tidal cycle. The primary problem in modeling the barotropic tide is to choose the amplitude of the motion. For the open ocean, the amplitude is taken to be about 1 m, and currents of about 10 cm/sec are assumed.

The barotropic tide is also important, as it interacts with the bottom to generate an internal tide (of the same frequency as the barotropic tide) and higher frequency internal waves, such as lee waves observed at Stellwagen Bank in Massachusetts Bay and propagating solitons in the Western Mediterranean Sea.

Internal Tide. The internal tide is thought to be generated by the coupling of the internal wave field with the barotropic tide in regions where the bottom has a very sharp discontinuity, such as the continental shelf break. The internal tides formed in these regions

are radiated into the deep ocean as beams of internal wave energy at tidal frequencies. They often proceed shoreward as internal solitons under favorable density stratification. The generation regions are sometimes found at midocean banks or seamounts.

The largest amplitudes of the internal tide occur on the continental shelves, with the amplitudes in the open ocean being much smaller. DeWitt et al. (1986) have studied the internal M_2 tide in the Rockall Channel area, west of the British Isles. They found that internal tides are consistent with the model of Prinsenbergh and Rattray (1975), with most of the energy being in the first vertical mode. The Prinsenbergh and Rattray model indicates that the amplitude of the n th mode should be distributed as $(1/n) \cdot \sin(n\pi H_1/H)$, where H_1 is the depth of the shallow region and H is the deep-ocean depth. Local information is not available at present, so the amplitudes of the internal tidal modes are assumed to be proportional to the inverse mode number.

Outline of Basic Garrett-Munk Model. In this simulation effort, the latest version of the "Garrett-Munk spectrum" is used. There are a number of different versions (Garrett and Munk, 1972, 1975, Cairns and Williams, 1975; Desaubies, 1976b, Munk, 1978). The Munk (1978) formulation is used because it incorporates more observational data than the others, and it is defined in a frequency-mode formulation, which is more appropriate to the eigenmode expansion approach. A table of terms and definitions is provided for convenience (Table 1).

The following assumptions are either made explicitly or implicitly in the derivation of the Garrett-Munk (GM) model.

- The Brunt-Väisälä frequency profile is given by $N_0 \exp(-z/b)$, where N_0 is the Brunt-Väisälä frequency at the surface, z is the depth, and b is a scale depth. For the usual GM formulation, $N_0 = 3$ cph and $b = 1300$ m.
- The fields of interest are given by a sum of weighted wave eigenfunctions based on a separated, linear, internal wave equation without shear.
- Local WKBJ-like¹ scaling is valid for all modes.
- The spectra are consistent with observed internal wave spectra.
- The spectrum is separable by mode and frequency.
- The energy associated with each mode can be "smeared" in the ω, k plane.

The spectral representations used in the most recent formulations (Munk, 1978) for the spectra of vertical

¹See Nayfeh (1973) for a discussion of the WKBJ approximation method.

Table 1. Terms and definitions.

b	Scale depth in the GM model. Usually 1.3 km.	r	horizontal range.
$B(\omega)$	GM frequency weighting function.	S_u	Spectrum of horizontal velocity.
BV	Brunt-Väisälä.	S_w	Spectrum of vertical velocity.
E	Nondimensional GM energy level, 6.3×10^{-5} .	S_z	Spectrum of vertical displacement.
f	Inertial frequency $= 2 \equiv \sin(\text{latitude})$.	$T(z)$	Weighting function used in the Numerov method.
$f(x)$	Function of x .	u	Horizontal, eastward velocity component.
F_u	GM form of the horizontal kinetic energy spectrum.	U_j	Horizontal u -velocity, j th mode.
F_w	GM form of the vertical kinetic energy spectrum.	v	Horizontal, northward velocity component.
GM	Garrett-Munk.	V_j	Horizontal, v -velocity, j th mode.
H	Bottom depth.	w	Vertical velocity component.
$H(j)$	GM mode weighting function.	W_j	Vertical velocity, j th mode.
HKE	Horizontal kinetic energy	x	Horizontal, eastward coordinate.
j	Mode number.	y	Horizontal, northward coordinate.
j^*	Mode scale, usually 3.	z	Vertical coordinate.
k	magnitude of horizontal wavenumber.	α	Direction of a section.
m	Vertical wavenumber.	$\beta_j(\omega)$	Weight of j th mode at frequency ω .
n	Direction index.	ζ	Vertical displacement.
$N(z)$	Brunt-Väisälä frequency at depth z .	κ	horizontal wavenumber vector.
N_0	GM base Brunt-Väisälä frequency, usually 3 cph.	$\theta_{nj}(\omega)$	Random direction of n th wave, j th mode, frequency ω .
NH	Vertically integrated Brunt-Väisälä frequency.	ω	Frequency.
		$\phi_{nj}(\omega)$	Random phase function.

velocity, F_w , and horizontal velocity, F_u , as functions of frequency, ω , mode, j , and local Brunt-Väisälä frequency, are

$$F_w(\omega, j) = b^2 N_0 N^{-1}(z) (\omega^2 - f^2) E(\omega, j), \quad (1)$$

$$F_u(\omega, j) = b^2 N_0 N(z) (\omega^2 + f^2) \omega^{-2} E(\omega, j), \quad (2)$$

where

$$E(\omega, j) = E B(\omega) H(j), \quad (3)$$

$$B(\omega) = 2\pi^{-1} f \omega^{-1} (\omega^2 - f^2)^{-1/2}, \quad (4)$$

$$H(j) = (j^2 + j_*^2)^{-1} / \Sigma (j^2 + j_*^2)^{-1}, \quad (5)$$

$$b = 1300 \text{ m}, \quad (6)$$

$$N_0 = 3 \text{ cph}, \quad (7)$$

$$E = 6.3 \times 10^{-5}. \quad (8)$$

The mode scale j_* is assumed equal to 3.

Extension to Realistic Brunt-Väisälä Profiles. To extend the GM model to general profiles of Brunt-Väisälä frequency, a number of further assumptions have been made.

- The displacement and velocity fields can be expressed as a sum of weighted wavefunctions, integrated over the following frequencies: from f to $\min_{\text{range}} \{\max_z [N(z)]\}$.

- The wavefunctions are determined by the separated z -dependent, linear, internal wave equation and local Brunt-Väisälä frequency profile, $N(z)$.

- The vertically integrated energy in each mode has the GM form in frequency and mode.

- In the first-level model, there are no shear effects.

These assumptions result in an energy scaling somewhat different from the GM model. This scaling is discussed in the following section.

Energy Scaling. The general form of the eigenfunction expansion in terms of the wave functions may be summarized as:

$$w(z, r, \alpha, t) = \sum_j \sum_n \int_f^N \beta_j(\omega) W_j(\omega; z) \cdot \exp \{ i [xk_j \cos \theta_{nj}(\omega) + yk_j \sin \theta_{nj}(\omega) + \omega t + \phi_{nj}(\omega)] \} \sqrt{d\omega}, \quad (9)$$

where $x = r \cdot \cos(\alpha)$, $y = r \cdot \sin(\alpha)$, $W_j(\omega; z)$ = vertical mode of order j at frequency ω , and is the solution to the ordinary differential equation,

$$W_j'' + k_j^2 B [N(z), \omega, f] W_j = 0, \\ W_j = 0 \text{ at } z = 0, H. \quad (10)$$

The primes in equation 10 denote differentiation with respect to z and

$$B [N(z), \omega, f] = \left[\frac{N^2(z) - \omega^2}{\omega^2 - f^2} \right], \quad (11)$$

where

$\beta_j(\omega)$ is contribution from m th mode at frequency ω ;

r is range;

α is direction of section;

$\theta_{nj}(\omega)$ and $\phi_{nj}(\omega)$ are independent random variables, uniformly distributed over $[0, 2\pi]$;

$\theta_{nj}(\omega)$ is the direction in which the n th wave of mode j is propagating;

$\phi_{nj}(\omega)$ are random phases associated with specific modes, directions and frequencies.

Here, we employ the formalism of Pierson (1955) to represent the ensemble of realizations of a random, stationary, Gaussian process. (See Pierson, 1955, or Kinsman, 1965, for a detailed explanation of the $\sqrt{d\omega}$ formalism.)

The primary problem in reconciling the GM spectral model of the internal wave field arises from the departure of real ocean density profiles from the exponential profile assumed by Garrett and Munk. Because real density profiles have scales of variation much smaller than the (approximate) vertical wavelength of a particular mode, the WKBJ-like approximations used in the GM (Garrett and Munk, 1972) model cannot be fully justified. Much of the formalism of the GM model may be kept, however, by appropriate scaling of the wave functions in a manner consistent with the vertically integrated GM spectra. The derivation of this scaling follows.

Define the orthonormal modes of the vertical velocity as W_i and subject to the relation:

$$\int_0^H W_i W_j [(N^2(z) - \omega^2)/(\omega^2 - f^2)] dz = \delta_{ij}, \quad (12)$$

where W_i and W_j are solutions to the internal wave equation 10 for different modes.

Then define the scaled (U_j, V_j, W_j) as $(U_j, V_j, W_j) = \beta_j(U_j, V_j, W_j)$. The specific horizontal kinetic energy (HKE) of the j th mode at frequency ω ,

integrated over the entire water column, can be written in terms of the scaled horizontal velocities U and V :

$$\text{HKE} = \frac{1}{2} \int_0^H U_j^2 + V_j^2 dz \quad (13)$$

$$\text{HKE} = \frac{1}{2} \int_0^H \left(1 + \frac{f^2}{\omega^2} \right) \frac{1}{k^2} \frac{d}{dz} W_j^2 dz \quad (14)$$

$$\text{HKE} = \frac{1}{2} \int_0^H \left(1 + \frac{f^2}{\omega^2} \right) \frac{N^2 - \omega^2}{\omega^2 - f^2} W_j^2 dz \quad (15)$$

$$\text{HKE} = \frac{1}{2} \beta_j^2 \left(1 + \frac{f^2}{\omega^2} \right) \quad (16)$$

From the GM formulation, equation 2 (Munk, 1978),

$$\text{HKE} = b^2 N_0 \left(1 + \frac{f^2}{\omega^2} \right) E(\omega, j) \int_0^H N(z) dz \quad (17)$$

However, if

$$\bar{N}H = \int_0^H N(z) dz, \quad (18)$$

then

$$\beta_j^2(\omega) = 2 b^2 N_0 \bar{N} H E(\omega, j) \quad (19)$$

is obtained as the proper scaling for the vertical eigenfunctions of vertical velocity.

Here $b = 1300$ m, $N_0 = 3$ cph = 0.005236 rad/sec, $H = 3000$ m (for the test case presented in the section on usage) and $E(\omega, j) = B(\omega) H(j)$ as defined in equations 3-5.

If all the random phase terms are combined into $\psi_m(\omega)$, then the expression for w is

$$w(z, t) = \sum_j w_j(z, t) \\ = \sum_j \int \beta_j(\omega) W_j(z; \omega) \exp \{ i[\omega t + \psi_j(\omega)] \} \sqrt{d\omega} \quad (20)$$

The autocorrelation function (Kinsman, 1965) can be constructed as

$$\begin{aligned} & \langle w_j(t, z) w_j(t', z) \rangle \\ &= \frac{1}{2} \int_0^\infty \beta_j^2(\omega) W_j^2(z; \omega) \cos[\omega(t - t')] d\omega, \quad (21) \end{aligned}$$

where $\beta_j(\omega)$ is set to zero, where $\omega < f$ and $\omega > N$. The spectrum of the vertical velocity fluctuations of the j th mode at a given level, z , are thus given by

$$S_w(\omega, z, j) = \beta_j^2(\omega) W_j^2(\omega, z), \quad (22)$$

and the total vertical velocity spectrum by the sum over all modes is

$$S_w(\omega, z) = \sum_j \beta_j^2 W_j^2(\omega, z). \quad (23)$$

The GM relations to the spectra of displacement and horizontal velocity are

$$S_u(\omega, z) = \frac{\omega^2 + f^2}{\omega^2 - f^2} \frac{N^2(z)}{\omega^2} S_w(\omega, z) \quad (24)$$

and

$$S_\zeta(\omega, z) = \omega^{-2} S_w(\omega, z). \quad (25)$$

If $S_w(\omega, z)$ is known, then integrating it in the vertical with the inner product weighting function gives

$$\begin{aligned} & \int_0^H \frac{N^2 - \omega^2}{\omega^2 - f^2} S_w(\omega, z) dz \\ &= \sum_j \beta_j^2(\omega) \int_0^H \frac{N^2 - \omega^2}{\omega^2 - f^2} W_j^2 dz \\ &= \sum_j \beta_j^2(\omega) = 2 b^2 N_0 \bar{N} H \sum_j E(\omega, j) \\ &= 2 b^2 N_0 \bar{N} H B(\omega) \sum_j H_j \\ &= 2 b^2 N_0 \bar{N} H B(\omega). \quad (26) \end{aligned}$$

There is a logical inconsistency here, however. Suppose the vertical kinetic energy from the GM

spectrum is computed for the j th mode. From integrating Equation 1,

$$\text{VKE} = 2 b^2 N_0 (\omega^2 - f^2) E(\omega, j) \int_0^H N^{-1}(z) dz \quad (27)$$

is obtained. But, by integrating the squared vertical mode velocities, we obtain

$$\begin{aligned} \text{VKE} &= \frac{1}{2} \beta_j^2(\omega) \int_0^H W_j^2 dz \\ &= b^2 N_0 \bar{N} H E(\omega, j) \int_0^H W_j^2 dz. \quad (28) \end{aligned}$$

These can be consistent only if

$$(\omega^2 - f^2) \int_0^H N^{-1}(z) dz = \bar{N} H \int_0^H W_j^2(z, \omega) dz. \quad (29)$$

From the orthogonality condition,

$$(\omega^2 - f^2) = \int_0^H (N^2 - \omega^2) W_j^2(z, \omega) dz, \quad (30)$$

we have

$$\begin{aligned} & \int_0^H (N^2 - \omega^2) W_j^2(z, \omega) dz \int_0^H N^{-1}(z) dz \\ &= \bar{N} H \int_0^H W_j^2(z, \omega) dz. \quad (31) \end{aligned}$$

However, if $N(z)$ is set to equal a constant, then the equality does not hold, so the scaling (26) is not consistent with the GM spectrum for the vertical velocity.

The source of this disagreement can be traced to the WKB-like approximation for the vertical wavenumber, $m = kN(\omega^2 - f^2)^{-1/2}$ and the relation that

$$S_u = \frac{m^2}{k^2} \frac{\omega^2 - f^2}{\omega^2} S_w, \quad (32)$$

which arises from the relation between the derivatives of w and the horizontal components of velocity.

Thus, if the GM form for the vertically integrated spectrum of the HKE is taken as our basis for scaling the vertical eigenfunctions, then a spectrum of vertical kinetic energy inconsistent with the GM form is obtained. The consistent form for the spectrum of the vertical kinetic energy is given by equation 23, and the spectrum for the vertical displacements is still related to S_w by equation 25. The spectrum for the HKE can be obtained from

$$S_u(\omega, z, j) = (\beta_j^2/k_j^2) (1 + f^2/\omega^2) W_j'^2 \quad (33)$$

and

$$S_u(\omega, z,) = \sum_j S_u(\omega, z, j). \quad (34)$$

B. Plotting/Interpolation Methods

The density of the output data is not sufficiently high to produce smooth plots, so the data must be interpolated onto a finer mesh, consistent with the screen resolution. The interpolation is performed by a bilinear function defined over each rectangle in the original output mesh. This method has one drawback: it does not ensure continuity of first derivatives. This flaw is compensated for by the increased speed and does not significantly affect the visual aspect of the plot if the original resolution is moderately high.

C. Export Algorithm

For plotting the fields on an IBM-compatible personal computer (PC) using a 16-color video graphics adapter, the data have been encoded as two-character numerical ASCII groups, varying from 00 to 99. These groups are transmitted over the local area network via Kermit or other convenient file transfer protocol in blocks of 39 pairs and plotted on a PC. A header in the file allows for reading-in scaling and plot generation information. A typical plotting program for a PC is listed in NOARL Technical Note 59.

A more efficient coding algorithm is possible, as only 16 colors are required. The data could be encoded for color level on the generating computer and transmitted with two color codes per byte, an improvement of a factor of 4 in storage. More efficient packing methods are possible and may be used in the future, but most of these methods require much more computational time at both the source and receiver and are prone to transmission errors.

III. Numerical Methods

A. Eigenfunction Calculations

The eigenvalues and eigenfunctions for the internal wave differential equation are computed using the Numerov method. This recursive finite-difference method has the advantage of being very fast and is fifth-order accurate. (The routine was originally written by Dozier (undated manuscript) of Scientific Applications International Corporation (SAIC) and is a part of the original code supplied by Rubenstein, also of SAIC.)

The Numerov method for the differential equation $y'' + f(z)y = 0$ is given by the relation

$$[1 + T(z + \Delta z)]y(z + \Delta z) + [1 + T(z - \Delta z)]y(z - \Delta z) = [2 + 10 T(z)] y(z) - \Delta z^6 y^{(6)}/240 + \dots, \quad (35)$$

where $T(z) = \Delta z^2 f(z)/12$.

The integration proceeds from the top and the bottom toward a point z_0 in the oscillatory region of the solution (i.e., where $f(z) > 0$). The eigenvalue is updated until a matched solution is found that satisfies continuity of the function and its first derivative at the matching point to the desired degree of accuracy. The mode is checked by ensuring that the number of zero crossings of the solution matches the mode number. This method occasionally fails when the eigenvalues are extremely close together, but this problem does not appear to be serious in most circumstances.

B. Integration Method

Several methods are available to estimate integrals using numerical techniques. The question arose as to which would provide a better estimate of the simulated fields. The result of a number of tests was, that due to the random phase function, no convergence exists other than a convergence to the Gaussian probability distribution function over an ensemble of realizations of the integral. We found that the simplest form of numerical integration, rectangular approximation, gave results as good as any other method and was more efficient.

C. Choice of Integration Subintervals

If a uniform grid is chosen over which to perform the numerical integration, then the grid must be made very fine to adequately resolve the structure of the GM spectrum near the inertial frequency. To use a coarser mesh while still resolving the spectrum, a logarithmic transformation is performed on the ω axis. This operation requires that the functional form

computed over the sum be modified and consideration taken in the choice of the differential weights.

The transformation is given by

$$\int_a^b f(x) dx = \int_a^b x(f) d(\ln x) = \int_{\ln a}^{\ln b} e^y f(e^y) dy. \quad (36)$$

The form on the left is exactly equal to that on the right, but if there is a singularity in $f(x)$ at $x = 0$, and a is near 0, then the form on the left provides a greater accuracy for the same number of terms in the sum or, conversely, less terms for the same accuracy. As an example for $f(x) = x^{-\nu}$, $a = 0.001$, $b = 5.0$, Gaussian quadrature did not reproduce the answer to better than 30%, while the form on the right agreed with the true answer to within the roundoff error of the computer. This transformation is easily modified for singularities in $f(x)$ at points different from $x = 0$. For the estimation of the internal wave field, the logarithmic form has been chosen, because the singularities in the GM spectra are located at $\omega = f \ll N$.

When computing the integral, it was necessary to compute the locations of the ends of each subinterval in the transformed space to properly resolve the square root of the differentials.

D. Problem of Probability Distribution Due to Finite Summation

The problem encountered here arises from the necessity of approximating the integral (9) as a finite sum over a set of intervals on the ω axis. The probability distributions of each component of the sum are Cauchy distributions; thus, the sum will be a sum of Cauchy distributions. As the sum approaches the limit of the integral, the probability distribution of the sum along the time axis or across the ensemble at given times will approach a Gaussian distribution almost surely (i.e., as the limit in the mean).

The computation has been modified somewhat to produce a rapid approach to a Gaussian distribution with few terms in the sum. The method is to add a small random phase that varies linearly in time to the constant (in time) random phase—that is, to replace $\phi_{nj}(\omega)$ in equation 9 with $\phi_{nj}(\omega) + \epsilon \psi_{nj}(\omega) t$, where ϵ is a small number and $\phi_{nj}(\omega)$ and $\psi_{nj}(\omega)$ are random variables, uniformly distributed over $(0, 2\pi]$.

IV. System and Program Structure

A. System Structure

Simulation Model. The design philosophy for the simulation model is based on simulating processes in

the ocean (or, alternatively, regions in ω , κ space) in order of their energetic importance on the time scales of interest, typically scales of hours to days. Because the most energetic part of the oceanic spectrum appears in the internal wave band, modeling the internal wave field has begun, and is followed by internal tides, mesoscale features, fronts and eddies, and large-scale features, in that order. The larger scale features are important to the smaller scales in that they control the dynamics of the internal wave field through the mean density field and mean shear field, but they will be incorporated in future versions of the model.

The first version of the simulation model was designed to provide global geographic coverage of the ocean and seasonal variations. Several databases exist, but the Levitus 5° database (Levitus, 1987) was chosen for the initial modeling based on storage considerations. This database is used to define stratification by providing spatially dependent profiles of temperature and salinity from which the density field is computed. The oceanic variability is produced by advecting the temperature and salinity fields by vertical wave motions at given positions and times, based on a variation of the GM internal wave model.

To make the first-level ocean simulation model generally useful, it was necessary to ensure that the model could be successfully run on a variety of computers and that the output data would be compatible between different machines and operating systems. This requirement has forced restrictions on the source code to ensure portability of the program and compatibility of the data. At present, the model has been run on VAX/VMS and CONVEX/UNIX systems. The restrictions are not onerous, however. They consist primarily of adhering to the Fortran 77 conventions. Some differences still exist between operating systems, that prevent the code from being completely portable (e.g., the CONVEX uses the convention that the record length parameter in opening direct access files is given in bytes, whereas the VAX convention specifies the record length parameter in 4-byte words).

Program MODEL1 is version 1 of the simulation model. Its output is a time series of vertical sections of vertical displacement, temperature, salinity, and three velocity components. A diagnostic file provides timing information on the VAX but not on the CONVEX.

Export Programs. Programs are available for exporting the ocean simulation model output from binary format into ASCII format. While binary formatted files require less storage space, problems might arise when transferring the files to computers

with different hardware architectures. For example, when transferring files from a VAX/VMS system to a CONVEX system, the byte order must be reversed. Binary characters can also be interpreted as control characters. In ASCII format, the data are more easily transferred to other computers due to the non-machine-specific structure of ASCII files.

Program MODEL1_EXPORT computes model field data produced by the ocean simulation model for plotting on PCs. Interactive prompts query for necessary input and the program produces an ASCII file. Plots can then be produced on the PC using the data in the ASCII file.

Program MODEL1_SV_EXPORT uses the ocean simulation model binary output file to produce an ASCII file containing sound velocity data for transfer to other computers.

Program ASCLEV converts the Levitus data file from binary, direct access format into ASCII, sequential format.

Program LEVASC converts the Levitus data file from ASCII, sequential format into binary, direct access format. Binary format is used by the ocean simulation model.

Diagnostic Programs. Several diagnostic programs are available for evaluating model output. This suite of programs provides a variety of functions, which includes generating data listings, creating plots, and examining energy levels.

Program MODEL1_PLOT computes and plots model fields on the DEC GKS Workstation 2000. No files are produced. This program is intended to provide a high-resolution, quick look at the data but suffers from the lack of a hard-copy device on the GKS workstation.

Program MODEL1_CONTOUR computes and plots model fields as contours. A DISSPLA metafile is produced as output. The metafile may be plotted using the DISSPLA postprocessor.

Program MODEL1_ENERGY computes internal wave energies as plot fields. Horizontal and vertical distributions are plotted. DISSPLA metafiles are produced as output. The metafile may be plotted using the DISSPLA postprocessor, DISSPOP.

Program MODEL1_UVW_READ reads the .AUX and .UV output files from the ocean model. The velocity fields U, V, and W are displayed on the user's terminal screen.

Program MODEL1_CTL_LIST lists the control information file MODEL1.CTL. This file contains information relating to program restart and eigenmode/eigenvalue control and use.

Program MODEL1_LOOK lists model displacement fields on the user's terminal screen. This program is primarily intended as a means of determining whether the typical values of the fields are reasonable.

Program MODEL1_EIGLOOK lists and plots eigenmodes and eigenvalues of the internal wavefunctions produced and stored by MODEL1. The plots are produced as a DISSPLA metafile and can be plotted using DISSPOP.

Program MODESUB_TEST computes the internal wave modes for a Brunt-Väisälä frequency profile and plots them. The plots are generated as DISSPLA metafiles that can be plotted using DISSPOP.

Program DISPERSION produces modal dispersion diagrams for a Brunt-Väisälä frequency profile at a given location and season. Output diagrams are written as DISSPLA metafiles.

PC Plotting. Output from the ocean simulation model consists of binary and ASCII files. To avoid problems associated with transferring files between different hardware architectures, binary files should be converted into ASCII format before being transferred to PCs. However, ASCII-formatted files require more disk storage than binary. If storage constraints prohibit binary-to-ASCII conversion, commercial and public domain software is available (e.g., Kermit) for binary file transfers between different computers. The export programs described earlier facilitate data transfer to PCs.

B. Program Structure

Diagrams that show program structure and provide comprehensive details of the main program and its associated subprograms are presented in the appendix. Also included are program layering diagrams, which provide a summary of the level of external subroutine calls. These diagrams provide the programmer with an outline of the manner in which the subprograms are called, the input and output functions, and the logic flow.

C. Data Structures

Data structures exist as binary, ASCII, and DISSPLA metaplot files. These files are used as program input, are created as program output, and are stored as disk files on the resident computer system. Interactive program prompts acquire necessary information, other than that stored as disk files, for successful program execution.

Input Files. LEVITUS.DAT, a climatological atlas of the world ocean is based on Levitus (1982). The

ocean simulation model requires LEVITUS.DAT as input. LEVITUS.DAT is an unformatted, direct access file requiring 7.29 Mbytes, or 14,580 VMS blocks, of disk storage. The record structure consists of 180 fields of REAL*4 data, including number of temperature observations, mean temperature (in units of degrees centigrade), standard deviation, number of salinity observations, mean salinity (in units of parts per thousand or practical salinity units), and standard deviation.

Output Files. MODEL1.DAT is an unformatted direct access file that contains displacement, modified temperature and salinity, and sound velocity fields. The record structure consists of 4*NZ fields of floating point data where NZ is the number of depths. Table 2 summarizes the output files for this model.

MODEL1.AUX is an unformatted, direct access file that contains defining parameters (labeled) that should be used to augment data in MODEL1.DAT. The record structure consists of 3*NZ fields, where NZ is the number of depths.

MODEL1.UV is an unformatted, direct access file that contains the velocity fields U, V, and W. The

record structure contains 3*NZ fields, where NZ is the number of depths.

MODEL1.EIG is an unformatted, direct access file that contains modal eigenvalues and eigenfunctions for W and k. The record structure contains NZ+1 fields, where NZ is the number of depths.

MODEL1.CTL is an unformatted, direct access file that contains control information relating to program restart and eigenmode/eigenvalue control and use. The record structure contains five fields.

DISSPLA META-PLOT FILES contain a non-device-specific file of data from which plots can be generated using a device-specific postprocessor. The software used for terminal and hardcopy graphics is Computer Associates' DISSPLA. The intermediate metaplot files are named POPFIL.DAT.

V. Usage

The ocean simulation model has been executed on DEC VAX/VMS 11/750 and MicroVAX II systems and on the CONVEX UNIX system. Adherence to most Fortran 77 standards has enabled program portability between the VAX and CONVEX systems.

Table 2. Ocean Simulation Model Output files.

FILE NAME	FMT	ACC	RECL	VARIABLES		RECORD STRUCTURE
MODEL1.DAT	U	D	4*NZ	Real	U,V,W, Z	(U(i),V(i),W(i), Z(i), i=1,NZ)
MODEL1.AUX	U	S	3*NZ	Real	NT,NX,NZ,DT, DX,DZ,T0,LAT, LON,AZ	NT,NX,NZ,DT, DX,DZ,T0,LAT, LON,AZ
MODEL1.UV	U	D	3*NZ	Real	U,V,W i=1,NZ)	(U(i),V(i),W(i), i=1,NZ)
MODEL1.EIG	U	D	NZ+1	Real	k W	k,(W(i),i=1,NZ)
MODEL1.CTL	U	D	5	Rec 1,	Int. NX Real DX,XMAX	NX,DX,XMAX
				Rec 2,	Int. NZ Real DZ,ZMAX	NZ,DZ,ZMAX
				Rec 3,	Int. NT Real DT,TMAX	NT,DT,TMAX
				Rec 4,	Int. LAT,LON LAT1,LON1 Real AZIMUTH	LAT,LON,LAT1,LON1, AZIMUTH
				Rec 5,	Int. IT0,NDIR Real T	T,IT0,NDIR

Notes:

- File format (FMT) is denoted as unformatted, U
- File access (ACC) is denoted as D for direct access, or S for Sequential

A. VMS (DEC-VAX)

The ocean simulation model can be executed either interactively or in batch mode. The Levitus climatological atlas, LEVITUS.DAT, is required as part of program input. Interactive prompts acquire remaining necessary program information.

Execution of the MODEL1 simulation program with the input described in section V.E on the VAX 11/750 required 47.49 minutes of processing time. The 11/750 possessed 7 Mbytes of memory and a floating-point accelerator. The system (SYSGEN) parameter, VIRTUALPAGECOUNT, was set to 21,384. User accounts required modification of the parameter PGFLQUO from 16,000 blocks to 20,000 blocks.

Because the 11/750 was used by other interactive users, executions were performed in batch mode. This method made it possible to avoid resource depletion and slowing down of the system for other interactive users.

On the MicroVAX II, the same program and input required 32.60 minutes. This MicroVAX is a standard system containing 10 Mbytes of memory and a floating-point accelerator. The SYSGEN parameter, VIRTUALPAGECOUNT, was set to 20,000. Users' accounts required setting the parameter PGFLQUO from 16,000 blocks to 20,000 blocks.

B. UNIX

The ocean simulation model has been recompiled and executed on a CONVEX computer system. The source code required minimal revision to reconcile the record length parameters, as discussed. The source code was compiled using the following command line

```
fc -O2 modell.f -o modell.
```

The test program and input ran in 3.38 minutes. To run the model, the associated files had to be deleted before starting the model. For details, see the examples in section V.E.

C. MS-DOS

The ocean simulation model has not been tested on a PC. The degree of software modification is dependent upon the PC Fortran implementation. Model output can be converted to ASCII format and down loaded onto PCs for plotting and listing.

D. Program Input Prompt Descriptions

The ocean simulation model requires user input for execution. If MODEL1 has already been executed,

then existing output files are used to avoid time-consuming recalculations. The file MODEL1.EIG contains eigenvalue/eigenfunction data and can be reused. Restart information is saved in MODEL1.CTL. MODEL1 automatically searches for the existence of these files before computation. The following input is required.

Latitude and Longitude Prompts: Floating-point values for latitude, longitude, and direction of section are required. Invalid coordinates are flagged and the prompt is reissued.

Season Prompt: A character string is required. The valid responses are WINTER, SPRING, SUMMER or FALL. Because MODEL1 prompt responses are case sensitive, only upper-case values are valid.

Maximum and Delta Ranges in km Prompt: The range is the horizontal distance (in kilometers) of the section. The maximum range is the total length of the section, and delta range provides the horizontal resolution for the calculation. In the present version of MODEL1, the total number of ranges must be less than or equal to 512.

Maximum and Delta Depths in m Prompt: The maximum and delta depths correspond to ranges but apply to the vertical coordinate. If the depth increment is chosen such that the number of depth intervals would be greater than 512, then the program sets the number of intervals to 512 and rescales the depth increment accordingly.

Maximum and Delta Times in s Prompt: The program allows the time series of the vertical sections to be calculated. The times are specified in seconds. No limits are placed on the ranges of the input times, but if the number of time increments is too large, then the available storage on the computer system can be exceeded.

Number of Directions in Isotropic Case Prompt: For the isotropic case (the only one presently allowed), each mode and frequency can have up to 50 plane waves propagating at different, randomly chosen directions. The number of such waves is a user input. For most purposes, NDIR = 3 seems to produce reasonable results.

Number of Eigenvalues (NEIG), Modes (NMODES), and Frequencies (NF) prompt: Integer values for NEIG, NMODES, and NF are required. Default values will be used if zeroes are entered where NEIG = 1000, NMODES = 5, and NF = 8. If NEIG is not set to 1, MODEL1 will compute as many eigenfunctions per mode and frequency as there are steps in the horizontal. If NEIG = 1, only the first position will be used to determine the Brunt-Väisälä

frequency profile and associated eigenfunctions. If NMODES = 0 and NF = 0, the defaults will be substituted; otherwise, NMODES and NF will equal the user-specified value.

Garrett-Munk Brunt-Väisälä Frequency Profile

Prompt: A character string (YES or NO) is required. If YES, a generic Brunt-Väisälä frequency profile is used in place of the real profile.

M2 Internal Tide Prompt: A character string (YES or NO) is required. If YES, a generic internal tide (M2) is included in the model. In this case, a 1-m internal tidal amplitude will be assumed.

At the end of input prompts, MODEL1 displays some of the user-supplied information and computed values.

E. Sample Program Execution

VAX/VMS. A sample program execution with inputs follows where program input is shown in boldface type. Additional run-time information is available in the General Description Section for MODEL1. The program produces some output other than the prompts. This output is intended to guide the user. For example, if the RESTART parameter is false, then it tells the user that the program will be reinitialized. If it is true, then the user has the choice of reinitializing the program or continuing from where it left off. The *EXIST parameter tells the user whether or not the file continues to exist. If only some exist, it is probably better to delete all the files and reinitialize. After all inputs are satisfied, a summary of the parameters that will be used to generate the model are listed. These parameters are for information only and play no part in the subsequent operation of the model.

\$ RUN MODEL1

RESTART = F
AUXEXIST F
DATEXIST F
CTLEXIST F
EIGEXIST F
RESTART = F

*****OCEAN SIMULATION MODEL*****
VERSION 1.0

Enter latitude, longitude and direction of section in decimal degrees.

30,-70,123

Enter season (WINTER, SPRING, SUMMER OR FALL)

SUMMER

Enter maximum and delta ranges in km,
maximum and delta depths in m,
maximum and delta times in s

40,.1

3000,10

100.,500.

ENTER THE NUMBER OF DIRECTIONS TO USE
IN ISOTROPIC CASE

3

ENTER NEIG, NMODES, NF

1,0,0

DO YOU WANT GENERIC GARRET-MUNK BVF
PROFILE?

NO

DO YOU WANT M2 INTERNAL TIDES?

NO

INPUT DATA

Latitude = 30.000

Longitude = -70.000

Azimuth = 123.000

Xmax = 40.000

Zmax = 3000.000

Tmax = 100.

NX,NZ,NT,NDIR = 401 301 1 1

COMPUTED VALUES

LAT = 30.000 LON = -70.000

LAT1 = 25.000 LON1 = -65.000

Reduced Azimuth = 135.000

Output from this simulation can be reviewed with the diagnostic programs. Figure 1 shows a VMS command file that executes the program MODEL1.

CONVEX/UNIX. Example shell files listings to run the model are shown in Figure 2. These files are mutually interdependent. One important note in running the program on the CONVEX/UNIX system is that the LEVITUS.DAT file must be named in upper-case characters and must reside in the same directory (subdirectory) as the MODEL1 program.

F. General Description

MODEL1. The ocean simulation model is an interactive, computation-intensive program. Because of the high number of iterations needed by eigenfunction/eigenvalue computations, MODEL1 is computer bound. To save processing time, MODEL1 can use existing files from previous executions. Significant time can be saved by reusing output files.


```

$! VAX/VMS COMMAND FILE FOR EXECUTING
$! OCEAN SIMULATION MODEL, MODEL1
$!
$! REMOVE ANY PRE-EXISTING OUTPUT FILES
$PURGE
$DEL DEBUG.DAT;*
$DEL DIAGNOSTICS.DAT;*
$DEL MODEL1.DAT;*
$DEL MODEL1.AUX;*
$DEL MODEL1.EIG;*
$DEL MODEL1.CTL;*
$DEL MODEL1.UV;*
$!
$!
$! BEGIN EXECUTION
$RUN MODEL1
30,-70,135
SUMMER
40,.1
3000,10
1,100
3
1,0,0
NO
NO

```

Figure 1. VAX/VMS Command file listing for running the test case for MODEL1.

```

File: modrun
#
clean
model1 < input.dat
time

File: clean
# cd \bigone\briggs
ls
rm MODEL1.CTL
rm MODEL1.DAT
rm MODEL1.AUX
rm MODEL1.EIG
rm MODEL1.UV
rm DEBUG.DAT
rm DIAGNOSTICS.LIS
ls

File: input.dat
30,-70,135.
SUMMER
40,.10
3000.,10.
1.,100.
3
1,0,0
NO
NO

```

Figure 2. CONVEX/UNIX Shell command file listings for running the test case for MODEL1.

Automatic inquiry is made for the presence of MODEL1 output files. If all files are found to exist, then MODEL1 will attempt to use them. An error will occur if these files were produced from an execution with an unsuccessful program termination. When all files do not previously exist, MODEL1 creates a new set.

Section V.E contains a sample program execution. Note that immediately after starting the program, MODEL1 reports whether previous output files exist. An F (FALSE) indicates no existence and T (TRUE) indicates the files exist.

Storage requirements increase as values for the number of modes (NMODES) and the number of frequencies (NF) increase. Array elements are computed with the formula $NMODES * NF * NZ * NX$, where NZ is the number of depths and NX is the number of points on the horizontal region.

MODEL1_EXPORT. Initial information about time (NT), horizontal region (NX), depth (NZ), and delta values (DT, DX, DZ), are displayed. Prompts are used to acquire desired plot type and iteration number. These inputs are used as indices for reading MODEL1.DAT. Output is written in ASCII format to a file named MODEL1.PC.

MODEL1_SV_EXPORT. Only one prompt, for iteration number, is issued. Data contained in MODEL1.DAT are used to compute sound velocity. Output consisting of horizontal, depth, and sound velocity data is written to an ASCII-formatted file named MODEL1_SV_ASCII.

LEVASC. No interactive input is required. LEVASC reads LEVITUS.DAT (direct access) and writes out the contents in ASCII format to a file named LEVITUS.ASC.

ASCLEV. No interactive input is required. ASCLEV reads LEVITUS.ASC (ASCII format) and writes out the contents in direct access format to a file named LEVITUS.DAT.

MODEL1_PLOT. High-resolution color plots are available on the DEC GKS workstation. MODEL1_PLOT is an interactive program that prompts for desired fields and, using the file MODEL1.DAT, computes plot fields for display on the GKS high-resolution color monitor.

MODEL1_CONTOUR. Prompts are used to acquire the name of the file and fields to be plotted. DISSPLA metafiles that contain contour plots are generated by MODEL1_CONTOUR. Figure 3 contains several examples of program execution. The output metafile must be postprocessed for device specifications. Sample output plots are displayed in Figures 4 through 7.

MODEL1_ENERGY. Only one prompt is issued. MODEL1_ENERGY automatically opens files (MODEL1.AUX, MODEL1.DAT and MODEL1.UV) that contain data used in computations. If a generic Garrett-Munk Brunt-Väisälä profile is used, then a reply of YES should be used. (In all other cases, a reply of NO should be used.) In this case, the computed energy profiles are estimated. Summary information is written to an ASCII file named ENERGY.LIS.

```

$! COMMAND FILE FOR USING MODEL1__CONTOUR TO CREATE PLOT
$! FILES OF OCEAN SIMULATION MODEL1 FIELDS ZD, TD, SD, AND SV
$!
$! NOTES:
$! "STD00001.DAT" IS THE DISSPLA DEVICE SPECIFIC FILE
$! NAME FOR THE DEC LN03 LASER PRINTER.
$!
$! DISSPLA APPENDS PLOTS TO EXISTING DEVICE SPECIFIC FILES.
$! DELETE OR RENAME EXISTING VERSIONS TO AVOID UNINTENTIONAL
$! PLOT APPENDING.
$!
$! "DISS105" IS A COMMAND WHICH INVOKES THE DISSPLA
$! POST-PROCESSOR. THE POST PROCESSOR GENERATES
$! DEVICE SPECIFIC PLOT FILES. HERE, THE LN03 SPECIFIC
$! PLOT FILE IS NAMED STD00001.DAT
$!
$! "LN03" IS A COMMAND THE SENDS A FILE TO THE LN03
$! PRINT QUEUE
$!
$SET VERIFY
$DELETE STD00001.DAT;*          ! AVOID PLOT APPENDING
$PURGE
$!
$RUN MODEL1__CONTOUR           ! PLOT VERTICAL DISPLACEMENT
MODEL1                        ! INPUT DATA FILE NAME
ZD                            ! FIELD TO PLOT
$DISS105                      ! CREATE DEVICE SPECIFIC FILE
12                            ! POST-PROCESSOR DIRECTIVE
DRAW=1-ENDS                   ! POST-PROCESSOR DIRECTIVE
$LN03 STD00001.DAT            ! PRINT THE PLOT FILE
$!
$RUN MODEL1__CONTOUR           ! PLOT TEMPERATURE ANOMALY
MODEL1
TD
$DELETE STD00001.DAT;*
$DISS105
12
DRAW=1-ENDS$RUN MODEL1__CONTOUR
$LN03 STD00001.DAT
$!
$RUN MODEL1__CONTOUR           ! PLOT SALINITY ANOMALY
MODEL1
SD
$DELETE STD00001.DAT;*
$DISS105
12
DRAW=1-ENDS
$LN03 STD00001.DAT
$!
$RUN MODEL1__CONTOUR           ! PLOT SOUND VELOCITY ANOMALY
MODEL1
SV
$DELETE STD00001.DAT;*
$DISS105
12
DRAW=1-ENDS
$LN03 STD00001.DAT
$PURGE

```

Figure 3. VAX/VMS Command file for producing contour plots of fields generated by MODEL1.

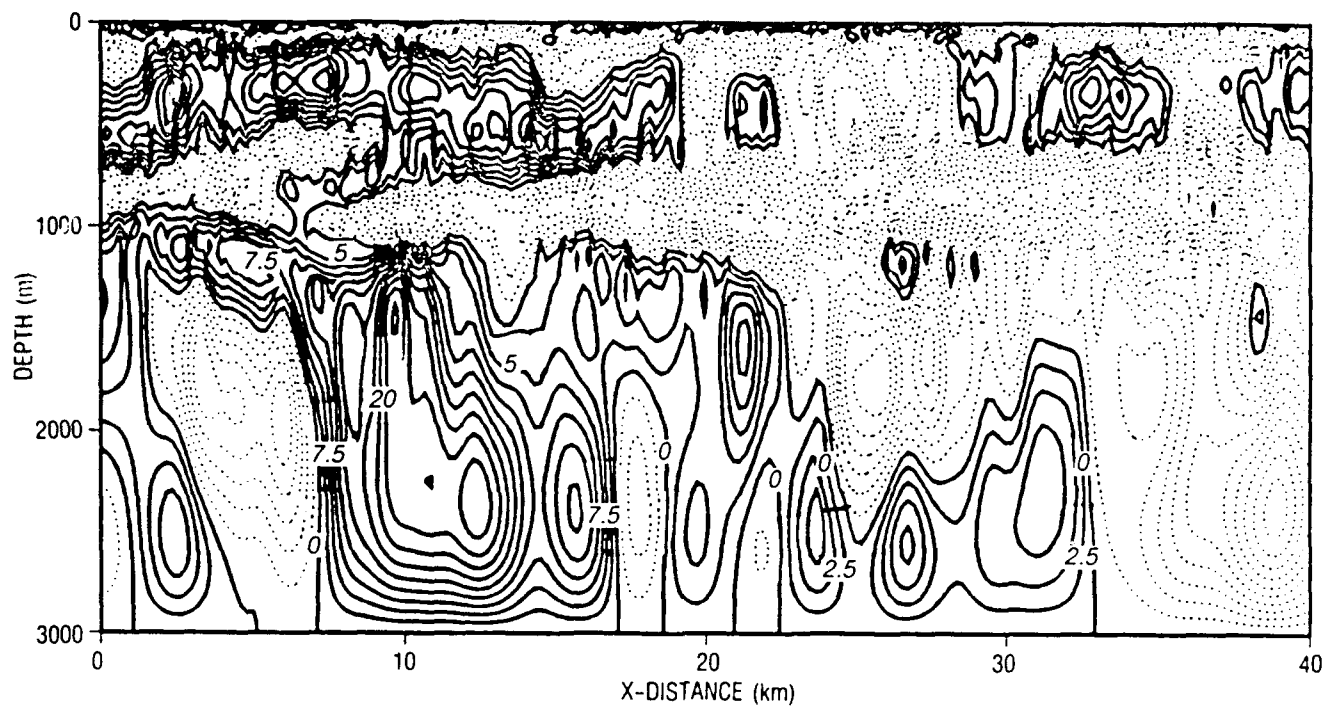


Figure 4. Contour plot of vertical displacement, produced by MODEL1_CONTOUR. Contour interval = 2.500.

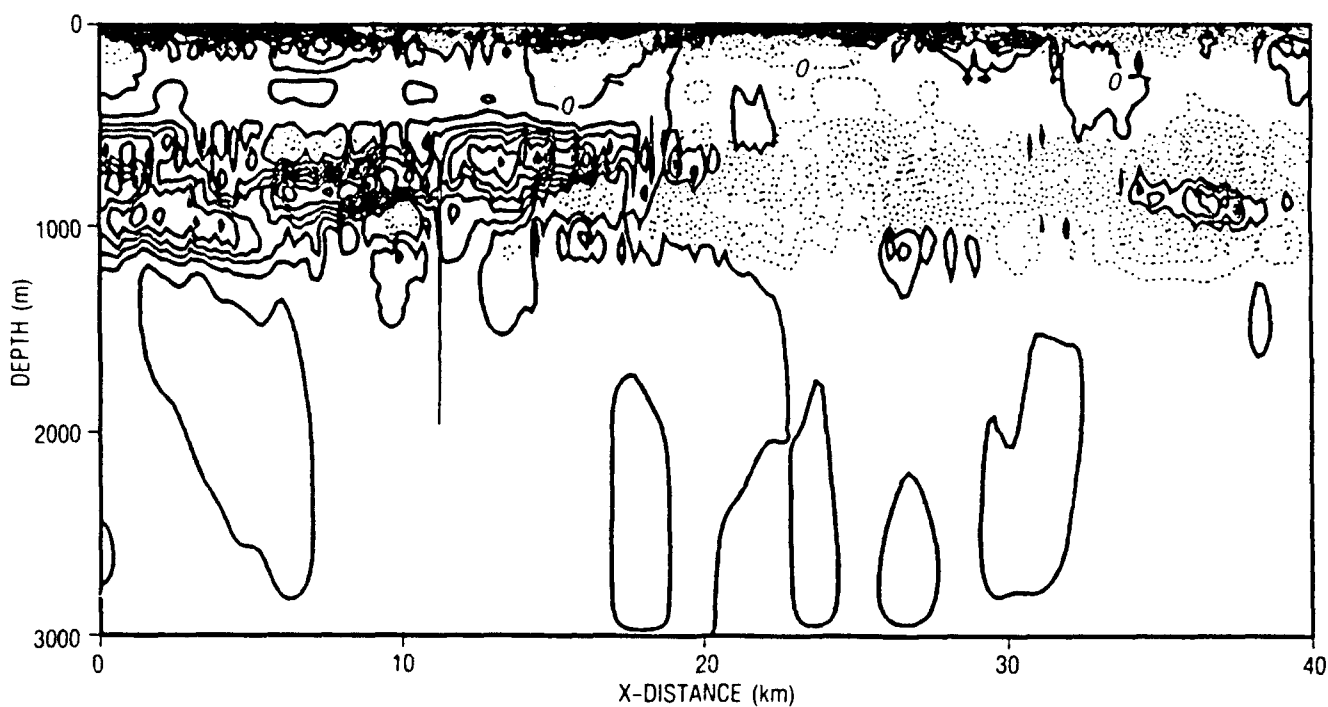


Figure 5. Contour plot of temperature anomaly, produced by MODEL1_CONTOUR. Contour interval = 0.050.

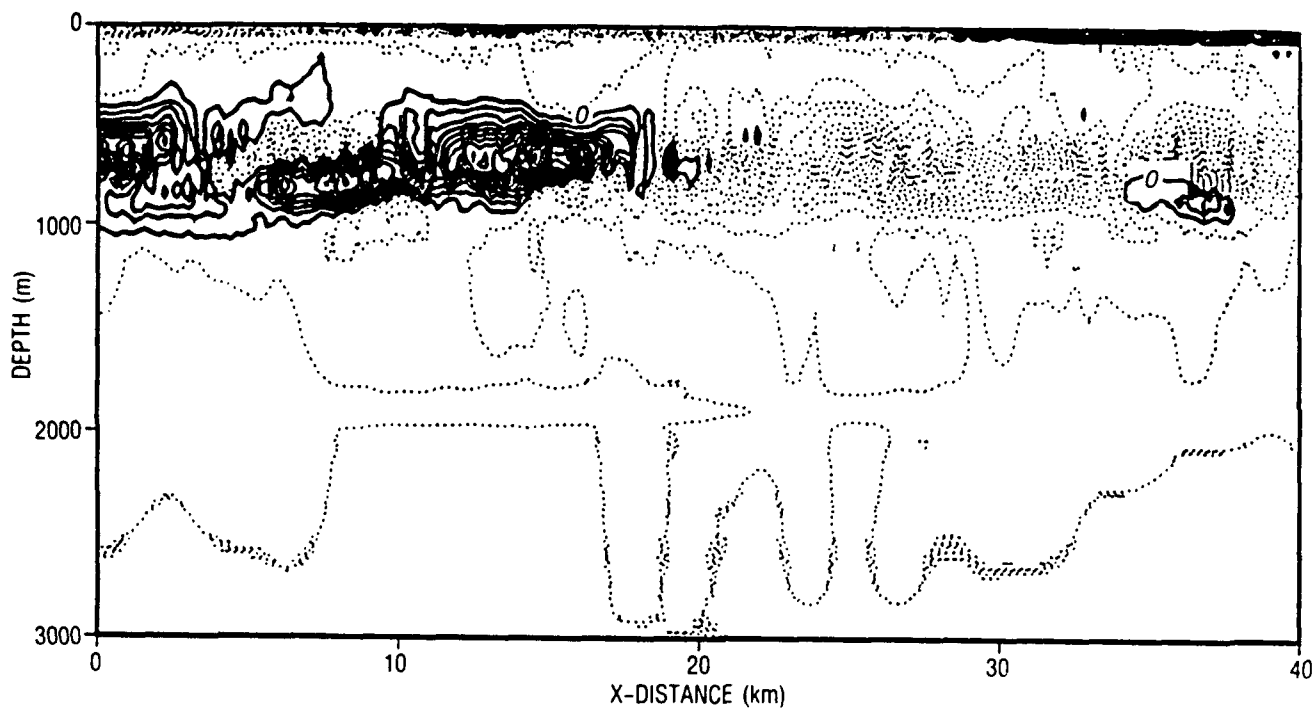


Figure 6. Contour plot of salinity anomaly, produced by MODEL1_CONTOUR. The ragged contour at the bottom of the plot is an artifact produced by a nearly zero anomaly. Contour interval = 0.005.

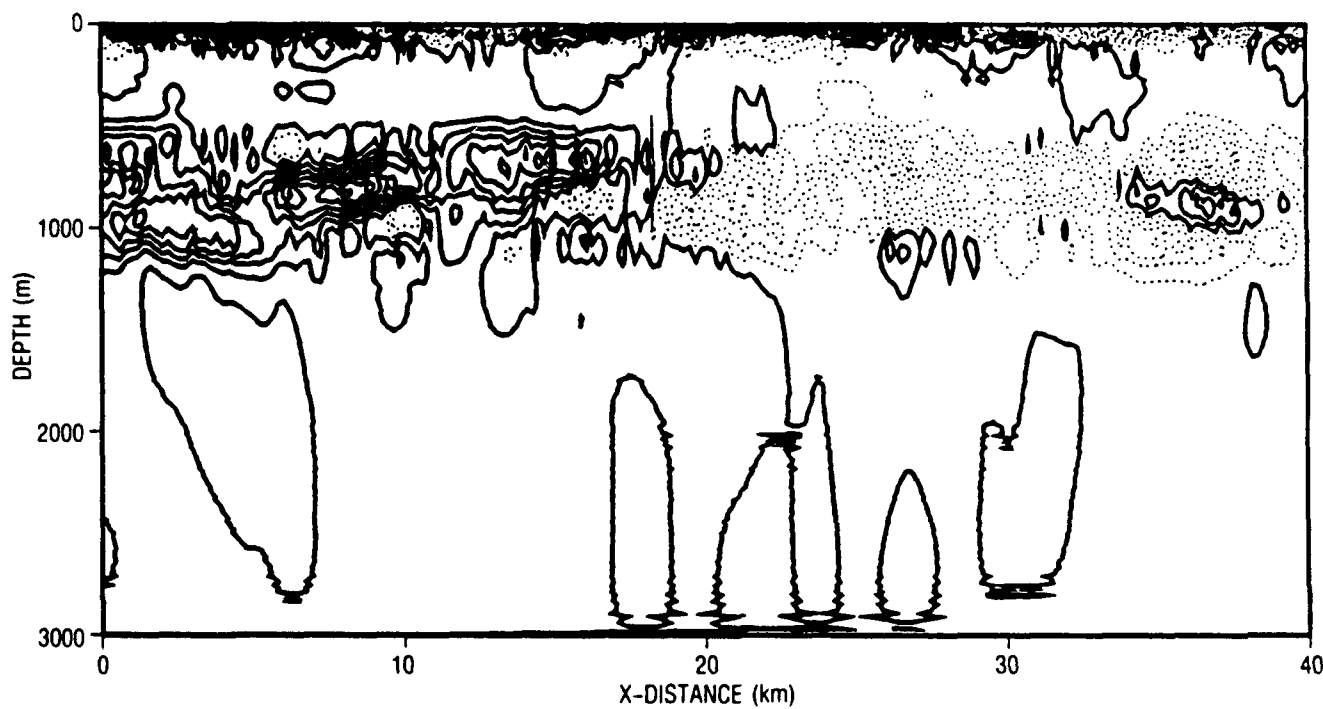


Figure 7. Contour plot of sound velocity anomaly, produced by MODEL1_CONTOUR. A slowly varying field near zero causes the ragged contours in the lower part of the diagram. Contour interval = 0.200.

DISSPLA metafiles that contain internal wave distribution plots are generated. Figure 8 shows a sample VAX/VMS command file for program execution. Figure 9 shows a sample plot of horizontal distribution. Figure 10 shows a sample plot of vertical distribution.

MODEL1_UVW_READ. Time (NT), horizontal region (NX), depth (NZ), and delta values (DT, DX, DZ), are displayed first. Prompts are used to acquire information about decimation rates for the horizontal and vertical direction. These inputs are used as indices for reading U, V, and W fields in MODEL1.DAT. Output is written to the user's terminal.

MODEL1_CTL_LIST. There are no input prompts for MODEL1_CTL_LIST. The contents of the control data file, MODEL1.CTL, are displayed on the user's terminal.

MODEL1_LOOK. Input prompts are used to acquire information about field minimum, maximum, and delta values. These values are used as indices for depth and for the horizontal region. Model displacement fields that contain the file MODEL1.DAT are displayed on the user's terminal.

MODEL1_EIG_LOOK. Input prompts acquire information about desired iteration number, horizontal field, number of frequencies, and number of modes. Plots of the horizontal field are generated using the desired iteration number and designated frequencies and modes. Values for horizontal fields and associated frequency, mode, and wave number are listed.

MODESUB_TEST. Input prompts are used to acquire information about position, season, depth, and frequency. Internal wave modes for Brunt-Väisälä frequency profiles are computed and written as a DISSPLA metafile. Figure 11 contains a sample VAX/VMS command file for program execution. Figure 12 contains a sample output plot.

DISPERSION. Prompts are used to acquire information on position, season, depth, number of frequencies, and number of modes. Modal dispersion diagrams for a Brunt-Väisälä frequency profile at a given location and season are written as a DISSPLA metafile. Figure 13 contains a sample VAX/VMS command file for program execution. Figure 14 contains a sample output plot.

```
$! COMMAND FILE FOR USING MODEL1__ENERGY TO
$! CREATE PLOT FILES OF OCEAN SIMULATION MODEL1
$! INTERNAL WAVE ENERGIES
$!
$! NOTES.
$! "STD00001.DAT" IS THE DISSPLA DEVICE SPECIFIC FILE
$! NAME FOR THE DEC LN03 LASER PRINTER.
$!
$! DISSPLA APPENDS PLOTS TO EXISTING DEVICE SPECIFIC FILES.
$! DELETE OR RENAME EXISTING VERSIONS TO AVOID UNINTENTIONAL
$! PLOT APPENDING.
$!
$! "DISS105" IS A COMMAND WHICH INVOKES THE DISSPLA
$! POST-PROCESSOR. THE POST PROCESSOR GENERATES
$! DEVICE SPECIFIC PLOT FILES. HERE, THE LN03 SPECIFIC
$! PLOT FILE IS NAMED STD00001.DAT
$!
$! "LN03" IS A COMMAND THE SENDS A FILE TO THE LN03
$! PRINT QUEUE
$!
$!
$!
$DELETE STD00001.DAT,*          ! AVOID PLOT APPENDING
$!
$RUN MODEL1__ENERGY
YES                             ! PROGRAM INPUT - A GENERIC BRUNT-
                                ! VAISALA PROFILE
$!
$!
$DISS105                        ! CREATE DEVICE SPECIFIC FILE
12                              ! POST-PROCESSOR DIRECTIVE
MODI=1-END(HWROT=MOVIE)$       ! POST-PROCESSOR DIRECTIVE
LN03 STD00001.DAT              ! PRINT THE PLOT FILES
```

Figure 8. VAX/VMS Command file listing for running MODEL1_ENERGY and plotting the results.

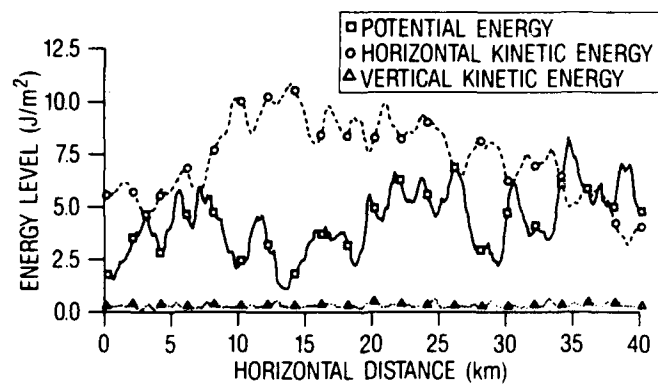


Figure 9. Horizontal energy distribution produced using the command file in Figure 8.

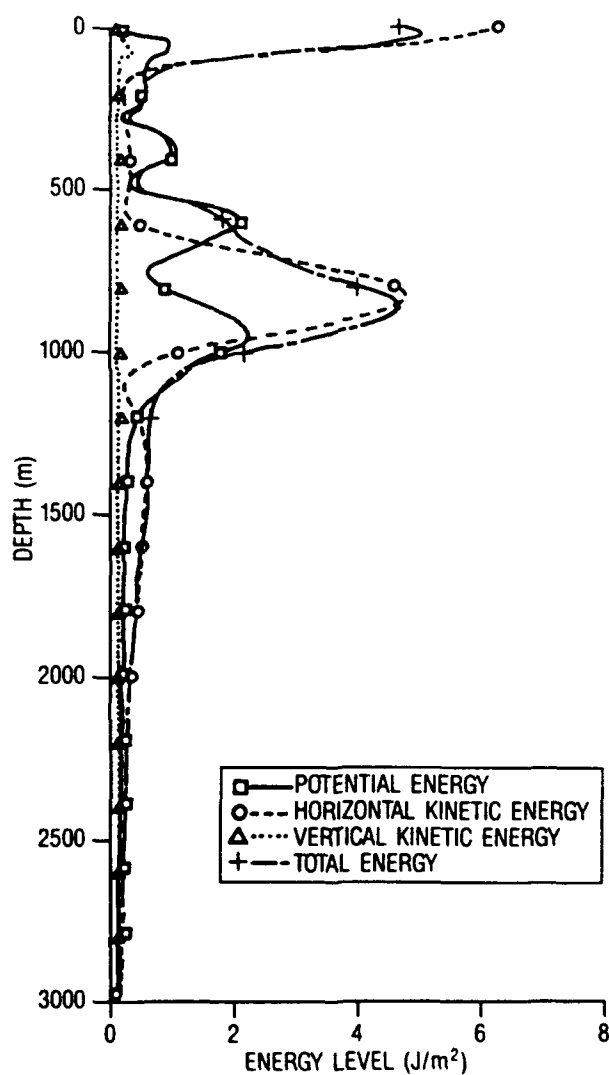


Figure 10. Vertical energy distribution produced using the command file in Figure 8.

```

$! COMMAND FILE FOR USING MODESUB__TEST TO
$! CREATE A PLOT FILE OF OCEAN SIMULATION MODEL1
$! INTERNAL WAVE MODES FOR BRUNT-VAISALA FREQUENCY
$! PROFILES
$!
$! NOTES:
$! "STD00001.DAT" IS THE DISSPLA DEVICE SPECIFIC FILE
$! NAME FOR THE DEC LN03 LASER PRINTER.
$!
$! DISSPLA APPENDS PLOTS TO EXISTING DEVICE SPECIFIC FILES.
$! DELETE OR RENAME EXISTING VERSIONS TO AVOID UNINTENTIONAL
$! PLOT APPENDING.
$!
$! "DISS105" IS A COMMAND WHICH INVOKES THE DISSPLA
$! POST-PROCESSOR. THE POST PROCESSOR GENERATES
$! DEVICE SPECIFIC PLOT FILES. HERE, THE LN03 SPECIFIC
$! PLOT FILE IS NAMED STD00001.DAT
$!
$! "LN03" IS A COMMAND THE SENDS A FILE TO THE LN03
$! PRINT QUEUE
$!
$!
$!
$DELETE STD00001.DAT;*          ! AVOID PLOT APPENDING
$!
$R MODESUB__TEST
30.-70                          ! PROGRAM INPUT - LOCATION
SUMMER                          ! PROGRAM INPUT - SEASON
3000,10                        ! PROGRAM INPUT - DEPTH MAX & MIN
2.0                            ! PROGRAM INPUT - FREQUENCY
$!
$DISS105                        ! CREATE DEVICE SPECIFIC FILE
12                             ! POST-PROCESSOR DIRECTIVE
MODI=1-END(HWROT=MOVIE)$       ! POST-PROCESSOR DIRECTIVE
LN03 STD00001.DAT              ! PRINT THE PLOT FILE

```

Figure 11. VAX/VMS Command file for running MODESUB__TEST.

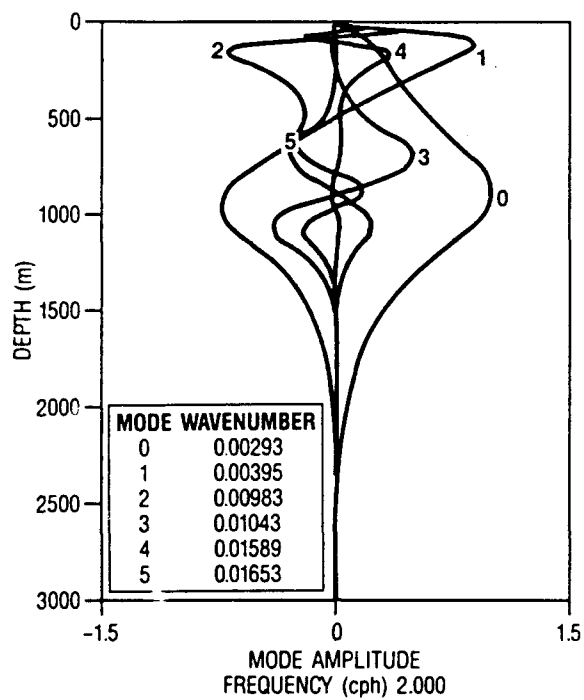


Figure 12. Plot output from the command file in Figure 11, showing the modes for the Brunt-Väisälä frequency profile at 30°N, 70°W at 2 cph, which is plotted on the right.


```

$! COMMAND FILE FOR USING DISPERSION TO
$! CREATE A PLOT FILE OF OCEAN SIMULATION MODEL1
$! MODAL DISPERSION DIAGRAMS
$!
$! NOTES:
$! ''STD00001.DAT'' IS THE DISSPLA DEVICE SPECIFIC FILE
$! NAME FOR THE DEC LN03 LASER PRINTER.
$!
$! DISSPLA APPENDS PLOTS TO EXISTING DEVICE SPECIFIC FILES.
$! DELETE OR RENAME EXISTING VERSIONS TO AVOID UNINTENTIONAL
$! PLOT APPENDING.
$!
$! ''DISS105'' IS A COMMAND WHICH INVOKES THE DISSPLA
$! POST-PROCESSOR. THE POST PROCESSOR GENERATES
$! DEVICE SPECIFIC PLOT FILES. HERE, THE LN03 SPECIFIC
$! PLOT FILE IS NAMED STD00001.DAT
$!
$! ''LN03'' IS A COMMAND THE SENDS A FILE TO THE LN03
$! PRINT QUEUE
$!
$!
$!
$DELETE STD00001.DAT;*          ! AVOID PLOT APPENDING
$!
$RUN DISPERSION
30,-70                          ! PROGRAM INPUT - LOCATION
SUMMER                          ! PROGRAM INPUT - SEASON
3000,10                         ! PROGRAM INPUT - DEPTH MAX & MIN
100                             ! PROGRAM INPUT - # OF FREQUENCIES
5                               ! PROGRAM INPUT - # OF MODES
$!
$DISS105                        ! CREATE DEVICE SPECIFIC FILE
12                              ! POST-PROCESSOR DIRECTIVE
MODI=1-END(HWROT=MOVIE)$       ! POST-PROCESSOR DIRECTIVE
LN03 STD00001.DAT              ! PRINT THE PLOT FILE

```

Figure 13. VAX/VMS Command file listing for running DISPERSION.

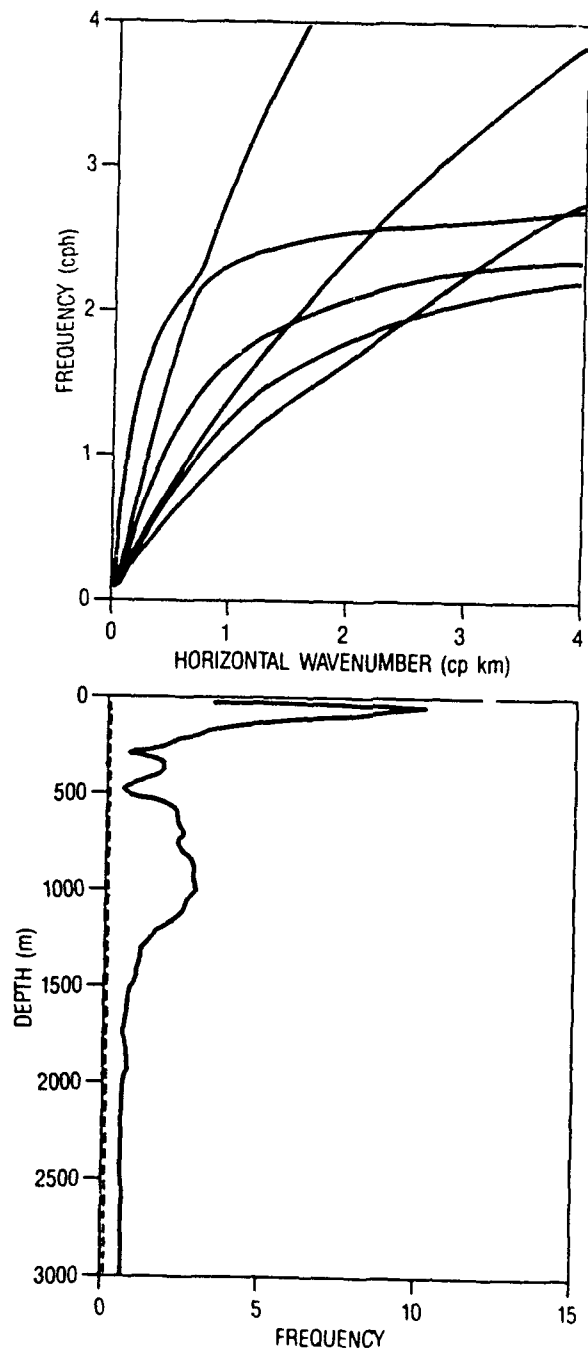


Figure 14. Plot of the output from *DISPERSION*, showing the line in internal wave dispersion diagram for the Brunt-Väisälä frequency profile plotted on the right.

VI. Conclusions

The first-level ocean simulation was designed to provide a capability for simulating the perturbations to the temperature, salinity, and velocity fields due to internal wave and tidal activity in midocean conditions. It was designed to be portable and easy to use and maintain. The simulation was therefore written in standard FORTRAN77 and has been tested on Digital Equipment Corporation's VAX computers, using the VMS operating system, and on a CONVEX computer, using the UNIX operating system. The program should operate properly on any other system, provided the record lengths of the direct access files are suitable.

VII. Recommendations

This program should be used for acoustic field simulation, cruise planning, mooring motion simulation, and general ocean system modeling. Further development of the internal tidal structure, particularly the propagation of the internal tide in shallow coastal regions, is needed to make the simulation more realistic and useful on continental shelf regions. The inclusion of varying bottom depths and variable output data structures would make the program more useful to the acoustic modeling community.

VIII. References

- Cairns, J. L. and G. O. Williams (1975). internal wave observations from a midwater float, part II. *JGR* 81:1943-1949.
- Desaubies, Y. J. F. (1976a). Acoustic phase fluctuations induced by internal waves in the ocean. *J. Acous. Soc. Am.* 60:785-800.
- Desaubies, Y. J. F. (1976b). Analytical representation of internal wave spectra. *JPO* 6:976-981.
- Desaubies, Y. J. F. (1978). On the scattering of sound by internal waves in the ocean. *J. Acous. Soc. Am.* 64:1460-1469.
- DeWitt, L. M., M. D. Levine, C. A. Paulson, and W. V. Burt (1986). Semidiurnal internal tide in JASIN: observations and simulation. *JGR* 91(C2):2581-2592.
- Dozier, L. B. (no date). *Calculation of Normal Modes in a Stratified Ocean*. Unpublished Manuscript. SAIC, McLean, VA.
- Dyson, F., W. Munk, B. Zetler (1976). Interpretation of multipath scintillations Eleuthra to Bermuda in terms of internal waves and tides. *J. Acous. Soc. Am.* 59(5):1121-1133.
- Ewart, T. E. (1980). A numerical simulation of the effects of oceanic finestructure on acoustic transmission. *J. Acous. Soc. Am.* 67(2):496-503.
- Ewart, T. E. (1989). A model of the intensity probability distribution for wave propagation in random media. *J. Acous. Soc. Am.* (in press).
- Flatte, S. M. and F. D. Tappert (1975). Calculation of the effect of internal waves on oceanic sound transmission. *J. Acous. Soc. Am.* 58(6):1151-1159.
- Garrett, C. J. R. and W. H. Munk (1972). Space-time scales of internal waves. *Geophysical Fluid Dynamics* 3:225-264.
- Garrett, C. J. R. and W. H. Munk (1975). Space-time scales of internal waves, a progress report. *JGR* 80:895-899.
- Levitus, S. (1982). *Climatological Atlas of the World Ocean*. NOAA Prof. Paper 13, 173 pp.
- Kinsman, B. (1965). *Wind Waves*. Prentice-Hall, Inc., Englewood Cliffs, New Jersey.
- Macaskill, C. and T. E. Ewart (1984). Computer simulation of two-dimensional random wave propagation. *IMA J. Appl. Math.* 33:1-15.
- Munk, W. H. (1978). Internal Waves and Small Scale Processes. In *Evolution of Physical Oceanography*, B. A. Warren and C. Wunsch, eds., MIT Press, Cambridge, Massachusetts.
- Nayfeh, A. H. (1973). *Perturbation Methods*. John Wiley and Sons, New York.
- Pierson, W. J. (1955). Wind Generated Gravity Waves. In *Advances in Geophysics*, v. 2, New York, Academic Press, 93-178 pp.
- Prinsenbergh, S. J., M. Rattray, Jr. (1975). Effects of continental slope and variable Brunt-Väisälä frequency on the coastal generation of internal tide. *Deep Sea Res.* 2:251-263.

Appendix


Structure and Layer Diagrams

MODEL1 Program Structure

MAIN PROGRAM

```
|  
CONTROL_INPUT  
  OPEN OUTPUT FILES  
  EIG_CONTROL  
|  
PROFILE_INPUT  
|  
INT_WAVE_SIMULATION  
  (TIME LOOP)  
    (X - LOOP)  
      DISPLACE  
      PROFILE_CALC  
      (Z - LOOP)  
        (OUTPUT --> MODEL1.DAT)  
      (END ZLOOP)  
    (END X - LOOP)  
  (END TIME - LOOP)
```

MODEL1 Program Layering

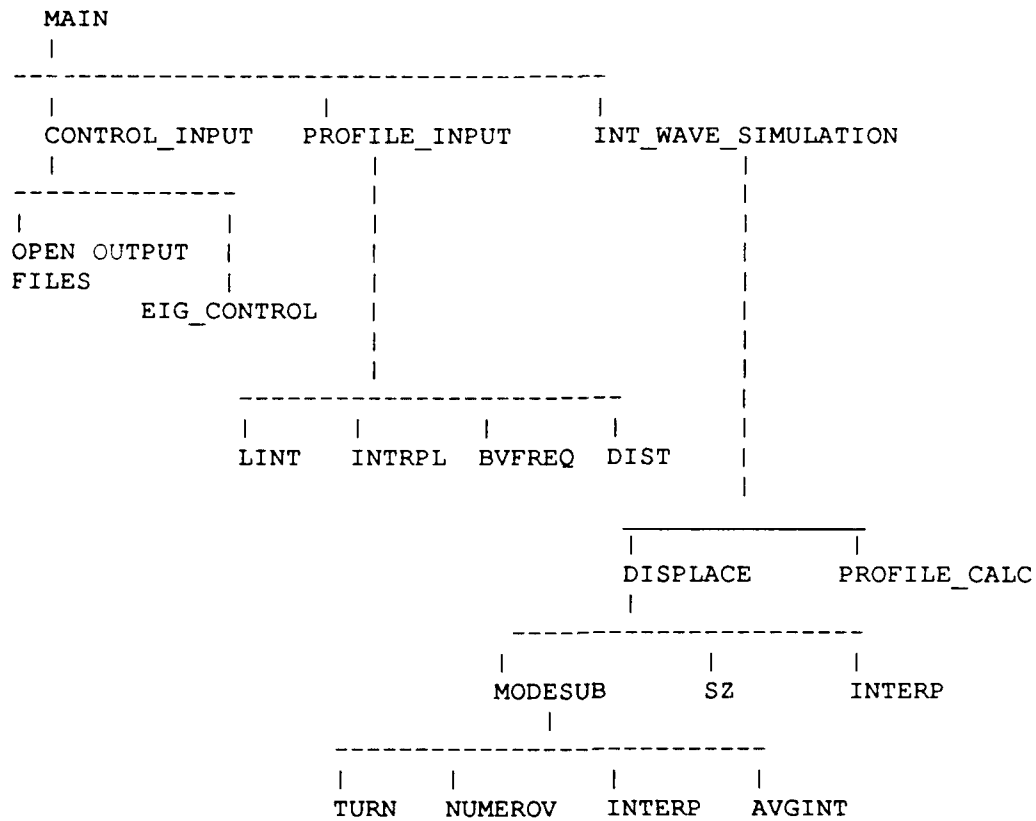

MODEL1_EXPORT Program Structure

MAIN

```
|
| PARSE (MODEL1.AUX)
|
| INTERACTIVE TERMINAL INPUT
|
| OPEN MODEL1.DAT & MODEL1.UV
|
| COMPUTE PLOT FIELDS
|
| WRITE FIELDS => MODEL1.PC
```

MODEL1_EXPORT Program Layering

Main

```
|
|-----|
| PARSE | | | | |
| MODEL1.AUX | | | | |
| | INTERACTIVE | | | | |
| | INPUT | | | | |
| | | OPEN MODEL1.DAT | | | | |
| | | & MODEL1.UV | | | | |
| | | | COMPUTE PLOT | | | | |
| | | | FIELDS | | | | |
| | | | | WRITE FIELDS
```

MODEL1 SV EXPORT Program Structure

```

MAIN
|
| PARSE (MODEL1.AUX)
|
| OPEN MODEL1.DAT
|
| COMPUTE SVEL (SOUND VELOCITY)
|
| OUTPUT => ASCII FILE CONTAINING
|              SOUND VELOCITY FIELD

```

MODEL1 SV EXPORT Program Layering

```
MAIN  
|  
-----  
| | | |  
PARSE | | | |  
MODEL1.AUX | | | |  
          OPEN      COMPUTE |  
          MCDEL1.DAT SOUND VELOCITY |  
  
                                OUTPUT => ASCII FILE
```


LEVASC Program Structure

```
MAIN
|
OPEN LEVITUS.DAT (BINARY FORMAT)
|
LOOP
  READ LEVITUS.DAT
  |
  WRITE LEVITUS.ASC (ASCII FORMAT)
END LOOP
```

LEVASC Program Layering

```
MAIN
|
-----
|
OPEN LEVITUS.DAT      |
                       |
                       | LOOP
                       |   READ  LEVITUS.DAT
                       |   |
                       |   WRITE LEVITUS.ASC
```

ASCLEV Program Structure

```
MAIN
|
OPEN LEVITUS.ASC (ASCII FORMAT)
|
LOOP
  READ LEVITUS.ASC
  |
  WRITE LEVITUS.DAT (BINARY FORMAT)
END LOOP
```

ASCLEV Program Layering


```
MAIN
|
-----
|
OPEN LEVITUS.ASC      |
                       |
                       | LOOP
                       |   READ  LEVITUS.ASC
                       |   |
                       |   WRITE LEVITUS.DAT
```

MODEL1_PLOT Program Structure

```
MAIN PROGRAM
  PARSE (MODEL1.AUX)
  |
  INTERACTIVE INPUT
  |
  OPEN MODEL.DAT & MODEL1.UV
  |
  ESTABLISH PLOTTING FEATURES
    UI$CREATE_COLOR_MAP
    UI$CREATE_DISPLAY
    UI$CREATE_WINDOW
    UI$HSV_TO_RGB
    UI$SET_COLOR
    UI$SET_WRITING_INDEX
    UI$SET_LINE_WIDTH
    UI$PLOT
  |
  PERFORM PLOT
  |
  ESTABLISH COLOR SCALE
    UI$PLOT
    UI$SET_FONT
    UI$NEW_TEXT_LINE
    UI$TEXT
  |
  CREATE COLOR SCALE
```

MODEL1_PLOT Program Layering


MAIN

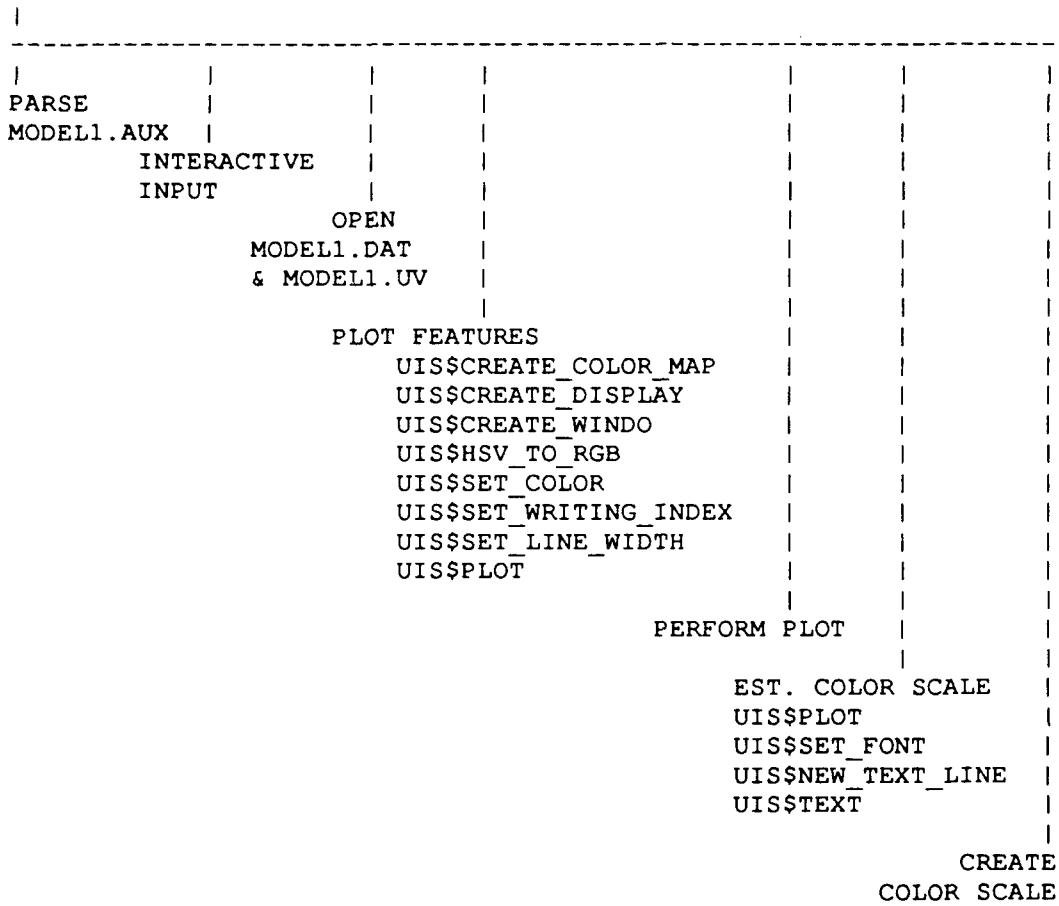

MODEL1_CONTOUR Program Structure

```
MAIN
|
INTERACTIVE TERMINAL INPUT
|
PARSE (MODEL1.AUX)
|
OPEN MODEL1.DAT & MODEL1.UV
|
ESTABLISH PLOT PARAMETERS
|
COMPUTE PLOT FIELDS
    SVEL
|
GRAPHICS SUBROUTINES
    COMPRS
    BCOMMON
    PAGE
    SCMPLX
    AREA2D
    HEADIN
    YNAME
    XNAME
    GRAF
    FRAME
    CONMAK
    CONLIN
    CONTUR
    ENDPL
    DONEPL
|
OUTPUT => DISSPLA PLOT METAFILE
```

MODEL1_CONTOUR Program Layering

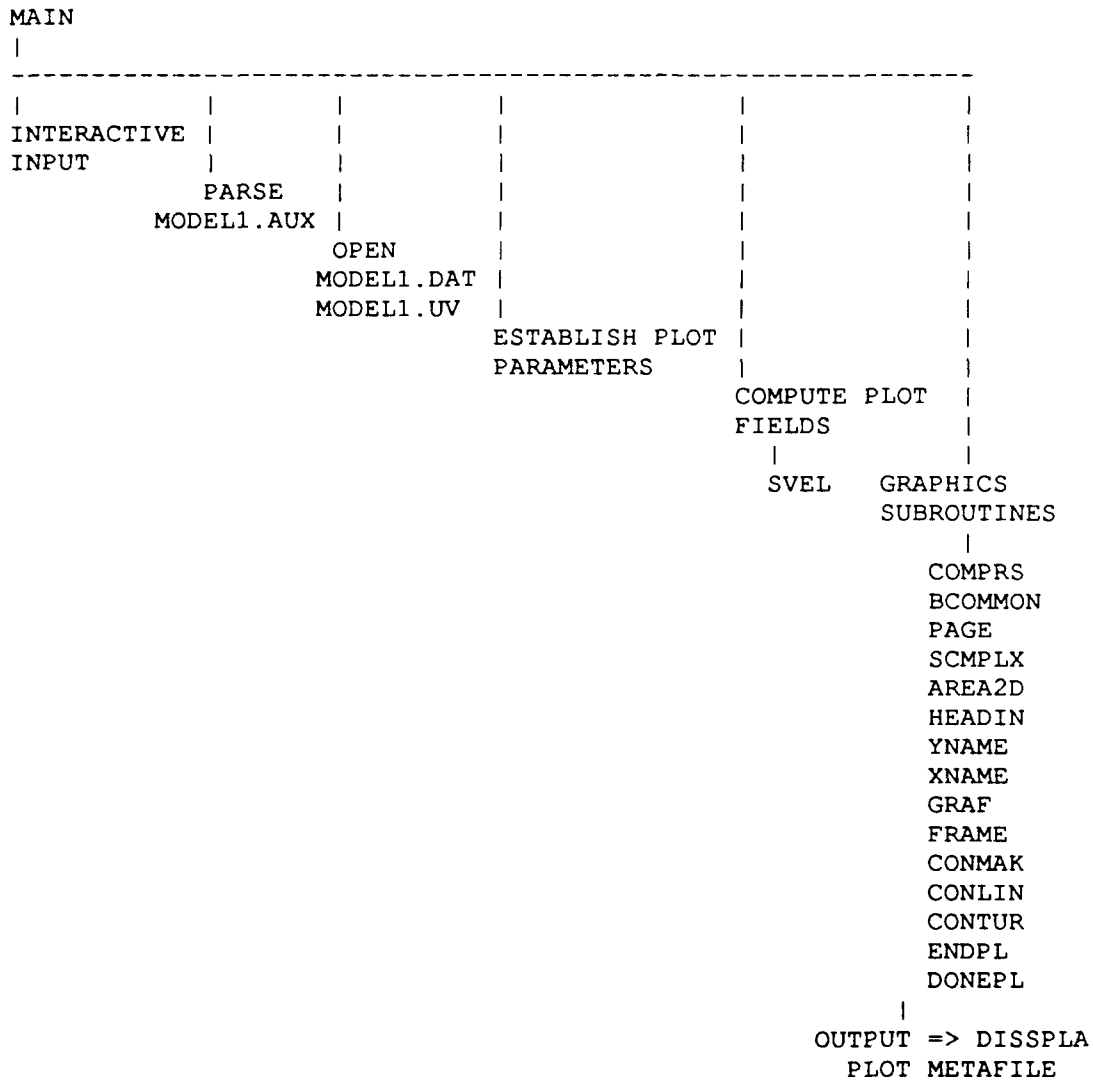

MODEL1_ENERGY Program Structure

```
MAIN
|
INTERACTIVE TERMINAL INPUT
|
PARSE (MODEL1.AUX)
|
OPEN MODEL1.DAT & MODEL1.UV
|
ESTABLISH PLOT PARAMETERS
|
COMPUTE PLOT FIELDS
|
OUTPUT => ENERGY.LIS
|
GRAPHICS SUBROUTINES
  COMPR
  |
  REPEAT FOR EACH PLOT
    SETCLR
    PAGE
    AREA2D
    TRIPLX
    HEIGHT
    HEADIN
    YNAME
    XNAME
    GRAF
    LINES
    LEGLIN
    CONLIN
    SCLPIC
    CURVE
    DASH
    DOT
    LEGEND
    |
    OUTPUT => DISSPLA METAFILE
  RESET
```

.....

```
|-----|
|INTERACTIVE | | | | | | |
|TERMINAL    | | | | | | |
|INPUT       |PARSE      | | | | | |
|            |MODEL1.AUX  | | | | | |
|           |OPEN        | | | | | |
|          |MODEL1.DAT   | | | | | |
|         |MODEL1.UV   | | | | | |
|        |EST. PLOT   | | | | | |
|       |PARAMETERS  | | | | | |
|      |COMPUTE     | | | | | |
|     |PLOT FIELDS  | | | | | |
|    |OUTPUT=>      | | | | | |
|   |ENERGY.LIS     | | | | | |
|  |GRAPHICS        | | | | | |
|  |COMPRS          | | | | | |
|  |               | | | | | |
|  |REPEAT FOR EACH PLOT| | | | | |
|  |SETCLR          | | | | | |
|  |PAGE           | | | | | |
|  |AREA2D         | | | | | |
|  |TRIPLX         | | | | | |
|  |HEIGHT         | | | | | |
|  |HEADIN         | | | | | |
|  |YNAME          | | | | | |
|  |XNAME          | | | | | |
|  |GRAF          | | | | | |
|  |LINES          | | | | | |
|  |LEGLIN         | | | | | |
|  |CONLIN         | | | | | |
|  |SCLPIC         | | | | | |
|  |CURVE          | | | | | |
|  |DASH           | | | | | |
|  |DOT            | | | | | |
|  |LEGEND         | | | | | |
|  |ENDPL         | | | | | |
|  |              | | | | | |
|  |OUTPUT=>REGIS FILE| | | | | |
|  |             | | | | | |
|  |RESET        | | | | | |
|  |            | | | | | |
|  |DONEPL       | | | | | |
```


MODEL1_UVW_READ Program Structure

```

MAIN
|
PARSE (MODEL1.AUX)
|
INTERACTIVE TERMINAL INPUT
|
OPEN MODEL1.UV
|
READ MODEL1.UV
|
OUTPUT => UV FIELDS

```

MODEL1_UVW_READ Program Layering

```

MAIN
|
-----
|
| PARSE
| MODEL1.AUX
|
| INTERACTIVE
| INPUT
|
| OPEN
| MODEL1.UV
|
| READ
| MODEL1.UV
|
| OUTPUT =>
| UV FIELDS
| TO TERMINAL

```

MODEL1_CTL_LIST Program Structure

```
Main
|
OPEN MODEL1.CTL FILE
|
OUTPUT => CTL INFORMATION
```

MODEL1_CTL_LIST Program Layering

```
MAIN
|
-----
|           |
|           |
OPEN        |
MODEL1.CTL  |
            |
            OUTPUT => CTL
            INFORMATION TO TERMINAL
```

MODEL1_LOOK Program Structure

```

MAIN
|
| PARSE (MODEL1.AUX)
|
| OPEN MODEL1.DAT
|
| READ (MODEL1.DAT FILE)
|
| INTERACTIVE TERMINAL INPUT
|
| OUTPUT MODAL DISPLACEMENTS
    
```

MODEL1_LOOK Program Layering

```

MAIN
|
|-----|
|         |         |         |         |
|         |         |         |         |
| PARSE    |         |         |         |
| MODEL1.AUX |         |         |         |
|         |         |         |         |
|         | OPEN    |         |         |
|         | MODEL1.DAT |         |         |
|         |         |         |         |
|         | READ    |         |         |
|         | MODEL1.DAT |         |         |
|         |         |         |         |
|         |         | INTERACTIVE |         |
|         |         | TERMINAL INPUT |         |
|         |         |         |         |
|         |         |         | OUTPUT => MODAL |
|         |         |         | DISPLACEMENTS |
|         |         |         | TO TERMINAL   |
    
```

MODEL1_EIGLOOK Program Structure

```
MAIN
|
PARSE (MODEL1.AUX)
|
OPEN MODEL1.EIG
|
GRAPHICS SUBROUTINES
  COMPRS
  |
  REPEAT FOR EACH PLOT
    SETCLR
    PAGE
    AREA2D
    FASHION
    HEIGHT
    HEADIN
    XNAME
    YNAME
    GRAF
    MESSAG
    INTNO
    CURVE
    ENDPI,
  |
  OUTPUT => DISSPLA METAFILE
  |
DONPL
```

MODEL1_EIGLOOK Program Layering

MAIN

|

|
PARSE
MODEL1.AUX

|
|
OPEN
MODEL1.EIG

|
|
|
GRAPHICS SUBROUTINES

|
COMPRS

|
REPEAT FOR EACH PLOT

|
SETCLR
PAGE
AREA2D
FASHION
HEIGHT
HEADIN
XNAME
YNAME
GRAF
MESSAG
INTNO
CURVE
ENDPL

|
OUTPUT => DISSPLA METAFILE

|
DONPL

MODESUB_TEST Program Structure

```
MAIN
|
CONTROL_INPUT
  OPEN TEST_DIAGNOSTICS.LIS
|
PROFILE_INPUT
  OPEN LEVITUS.DAT
  LINT
  INTERPL
  BVFREQ
  OUTPUT => TEST_DIAGNOSTICS.LIS
|
INT_WAVE_SIMULATION
  DISPLACE
  .CODESUB
  GRAPHICS SUBPROGRAMS
    SET PLOT FEATURES
    (LOOP FOR EACH INTERNAL WAVE MODE)
      OUTPUT => DISSPLA METAFILE
    (END LOOP)
  BRUNT-VAISALA FREQUENCY PROFILE PLOTS
    OUTPUT => DISSPLA METAFILE
```

MODESUB TEST Program Layering

MAIN

CONTROL INPUT

OPEN TEST DIAGNOSTICS.LIS

PROFILE INPUT

```
OPEN          LINT  INTRPL BVFREO DIST OUTPUT =>
```

LEVITUS.DAT

TEST DIAGNOSTICS.LIS

INT WAVE SIMULATION

DISPLACE

MODESUB

GRAPHICS SUBPROGRAMS

TURN	NUMEROV	INTERP	AVGINT
1	1	1	1
2	2	2	2
3	3	3	3
4	4	4	4
5	5	5	5
6	6	6	6
7	7	7	7
8	8	8	8
9	9	9	9
10	10	10	10
11	11	11	11
12	12	12	12
13	13	13	13
14	14	14	14
15	15	15	15
16	16	16	16
17	17	17	17
18	18	18	18
19	19	19	19
20	20	20	20
21	21	21	21
22	22	22	22
23	23	23	23
24	24	24	24
25	25	25	25
26	26	26	26
27	27	27	27
28	28	28	28
29	29	29	29
30	30	30	30
31	31	31	31
32	32	32	32
33	33	33	33
34	34	34	34
35	35	35	35
36	36	36	36
37	37	37	37
38	38	38	38
39	39	39	39
40	40	40	40
41	41	41	41
42	42	42	42
43	43	43	43
44	44	44	44
45	45	45	45
46	46	46	46
47	47	47	47
48	48	48	48
49	49	49	49
50	50	50	50
51	51	51	51
52	52	52	52
53	53	53	53
54	54	54	54
55	55	55	55
56	56	56	56
57	57	57	57
58	58	58	58
59	59	59	59
60	60	60	60
61	61	61	61
62	62	62	62
63	63	63	63
64	64	64	64
65	65	65	65
66	66	66	66
67	67	67	67
68	68	68	68
69	69	69	69
70	70	70	70
71	71	71	71
72	72	72	72
73	73	73	73
74	74	74	74
75	75	75	75
76	76	76	76
77	77	77	77
78	78	78	78
79	79	79	79
80	80	80	80
81	81	81	81
82	82	82	82
83	83	83	83
84	84	84	84
85	85	85	85
86	86	86	86
87	87	87	87
88	88	88	88
89	89	89	89
90	90	90	90
91	91	91	91
92	92	92	92
93	93	93	93
94	94	94	94
95	95	95	95
96	96	96	96
97	97	97	97
98	98	98	98
99	99	99	99
100	100	100	100

SET PLOT FEATURES REPEAT FOR EACH
INTERNAL WAVE MODE

FREQ
PROFILE

COMPRS

SETDEV

PAGE

PHYSOR

AREA2D

SERIF

SHDCHR

HEIGHT

HEAD IN

XNAME

YNAME

GRAF

FRAME

GRACE

CURVE

OUTPUT =>

POPFIL.DAT


OUTPUT => POPFIL.DAT

DONEPL

DISPERSION Program Structure

```
MAIN
|
CONTROL_INPUT
  OPEN TEST_DIAGNOSTICS.LIS
|
PROFILE_INPUT
  OPEN LEVITUS.DAT
  INTERPL
  BVFREQ
  OUTPUT => TEST_DIAGNOSTICS.LIS
|
INT_WAVE_SIMULATION
  DISPLACE
  MODESUB
  GRAPHICS SUBPROGRAMS
  SET PLOT FEATURES
  (LOOP FOR EACH INTERNAL WAVE MODE)
    OUTPUT => DISSPLA METAFILE
    POPFIL.DAT
  (END LOOP)
  BRUNT-VAISALA FREQUENCY PROFILE PLOTS
  OUTPUT => DISSPLA METAFILE
```


DISPERSION Program Layering

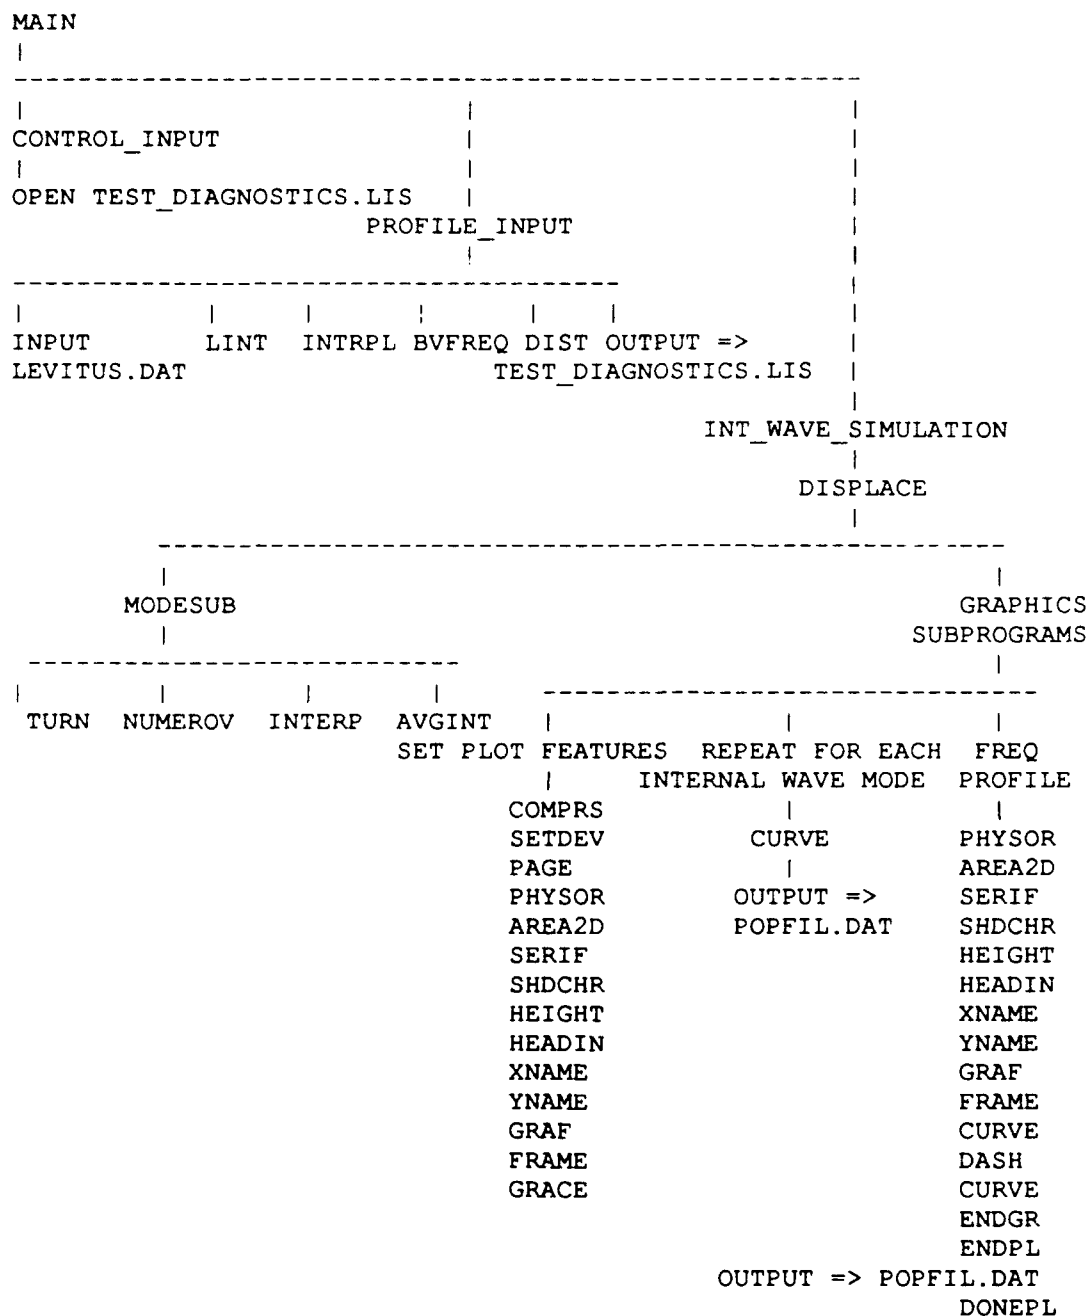

Distribution List

Applied Physics Laboratory
Johns Hopkins University
Johns Hopkins Road
Laurel MD 20707

Applied Physics Laboratory
University of Washington
1013 NE 40th St.
Seattle WA 98105

Applied Research Laboratory
Pennsylvania State University
P.O. Box 30
State College PA 16801

Applied Research Laboratory
University of Texas at Austin
P.O. Box 8029
Austin TX 78713-8029

Assistant Secretary of the Navy
Research, Development & Acquisition
Navy Department
Washington DC 20350-1000

Chief of Naval Operations
Navy Department
Washington DC 20350-2000
Attn: OP-71
OP-987

Chief of Naval Operations
Oceanographer of the Navy
U.S. Naval Observatory
34th & Massachusetts Ave. NW
Washington DC 20392-1800
Attn: OP-096
OP-96B

David W. Taylor Naval Research Center
Bethesda MD 20084-5000
Attn: Commander

Defense Mapping Agency
Systems Center
8613 Lee Hwy.
Fairfax VA 22031-2138
Attn: Director
Code SGWN

Director of Navy Laboratories
Space & Naval Warfare Sys Com
SPAWAR 005
Washington DC 20363-5100

Fleet Antisub Warfare Tng Ctr-Atl
Naval Station
Norfolk VA 23511-6495
Attn: Commanding Officer

Fleet Numerical Oceanography Center
Monterey CA 93943-5005
Attn: Commanding Officer

National Ocean Data Center
1825 Connecticut Ave., NW
Universal Bldg. South, Rm. 206
Washington DC 20235

Naval Air Development Center
Warminster PA 18974-5000
Attn: Commander

Naval Air Systems Command HQ
Washington DC 20361-0001
Attn: Commander

Naval Civil Engineering Laboratory
Port Hueneme CA 93043
Attn: Commanding Officer

Naval Coastal Systems Center
Panama City FL 32407-5000
Attn: Commanding Officer

Naval Facilities Engineering
Command HQ
200 Stovall St.
Alexandria VA 22332-2300
Attn: Commander

Naval Oceanographic Office
Stennis Space Center MS 39522-5001
Attn: Commanding Officer

Naval Oceanography Command
Stennis Space Center MS 39529-5000
Attn: Commander

Naval Oceanographic & Atmospheric
Research Laboratory
Atmospheric Directorate
Monterey CA 93943-5006
Attn: Code 400

Naval Oceanographic & Atmospheric
Research Laboratory
Stennis Space Center MS 39529-5004
Attn: Code 100
Code 105
Code 115
Code 125L (10)
Code 125P
Code 125EX
Code 200
Code 300

Naval Oceanographic & Atmospheric
Research Laboratory
Liaison Office
Crystal Plaza #5, Rm. 802
2211 Jefferson Davis Hwy.
Arlington VA 22202-5000
Attn: B. Farquhar

Naval Ocean Systems Center
San Diego CA 92152-5000
Attn: Commander

Naval Postgraduate School
Monterey CA 93943
Attn: Superintendent

Naval Research Laboratory
Washington DC 20375
Attn: Commanding Officer

Naval Sea Systems Command HQ
Washington DC 20362-5101
Attn: Commander

Naval Surface Warfare Detachment
Silver Spring
White Oak Laboratory
10901 New Hampshire Ave.
Silver Spring MD 20903-5000
Attn: Officer in Charge
Library

Naval Surface Warfare Center
Dahlgren VA 22448-5000
Attn: Commander

Naval Underwater Systems Center
Newport RI 02841-5047
Attn: Commander

Naval Underwater Systems Center Det
New London Laboratory
New London CT 06320
Attn: Officer in Charge

Office of Naval Research
800 N. Quincy St.
Arlington VA 22217-5000
Attn: Code 10D/10P, Dr. E. Silva
Code 112, Dr. E. Hartwig
Code 12
Code 10

Office of Naval Research
ONR European Office
Box 39
FPO New York 09510-0700
Attn: Commanding Officer

Office of Naval Technology
800 N. Quincy St.
Arlington VA 22217-5000
Attn: Code 20, Dr. P. Selwyn
Code 228, Dr. M. Briscoe
Code 234, Dr. C. Votaw

Scripps Institution of Oceanography
University of California
P.O. Box 6049
San Diego CA 92106

Space and Naval Warfare Sys Com
4455 Overlook Ave., SW
Washington DC 20375
Attn: Commander

Woods Hole Oceanographic Institution
P.O. Box 32
Woods Hole MA 02543
Attn: Director

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503

1. Agency Use Only (Leave blank).

2. Report Date.

August 1990

3. Report Type and Dates Covered.

Final

4. Title and Subtitle.

Ocean Simulation Model for Internal Waves

5. Funding Numbers.

Program Element No. 602435N

Project No. 03590

Task No. 0M0G

Accession No. 13310T

6. Author(s).

Kim David Saunders, Stephanie A. Briggs, and David Rubenstein*

7. Performing Organization Name(s) and Address(es).

Ocean Science Directorate
Naval Oceanographic and Atmospheric Research Laboratory
Stennis Space Center, Mississippi 39529-5004

8. Performing Organization
Report Number.

NOARL Report 10

9. Sponsoring/Monitoring Agency Name(s) and Address(es).

10. Sponsoring/Monitoring Agency
Report Number.

11. Supplementary Notes.

*Science Applications International Corporation, McLean, Virginia

12a. Distribution/Availability Statement.

Approved for public release; distribution is unlimited. Naval Oceanographic and Atmospheric Research Laboratory, Stennis Space Center, Mississippi 39529-5004.

12b. Distribution Code.

13. Abstract (Maximum 200 words).

Oceanographic simulation models are valuable tools for imitating temperature, salinity, density, sound velocity, and other environmental areas of naval interest. The Naval Oceanographic and Atmospheric Research Laboratory was tasked to implement and operate ocean simulation models. This manual presents the theoretical foundations for the first version of the model, the details of the primary model's structure, and the computer programs and instructions for implementing and using the model.

The first version of the model was based on the premise that the most important features of interest to the Navy are produced by internal waves. Subsequent versions of the model will incorporate variability produced by shear, fronts, mixed-layer processes and turbulent mixing. A full three-dimensional, time-varying model is expected in about three years.

14. Subject Terms.

operations research, fluid mechanics, physical and dynamic oceanography, computer programming and software

15. Number of Pages.

48

16. Price Code.

17. Security Classification
of Report.

Unclassified

18. Security Classification
of This Page.

Unclassified

19. Security Classification
of Abstract.

Unclassified

20. Limitation of Abstract.

None