

ESME Workbench Innovations

David C. Mountain
Boston University
Department of Biomedical Engineering
44 Cummingtown St.
Boston, MA 02215
phone: 617-353-4343 fax: 617-353-6766 email: dcm@bu.edu

Award Number N00014 0710623
<http://esme.bu.edu>

LONG-TERM GOALS

The goal of this project is to create a totally new version of the ESME (Effects of Sound in the Marine Environment) Workbench. The ESME Workbench is software simulation system that will serve as an educational and a basic research tool for the marine mammal research community and, in the longer term, will serve as an aid for environmental planners who need to assess the potential impact of Naval training exercises on marine animals.

OBJECTIVES

1. Finalize ESME software architecture and develop capability for simulating and analyzing 3D sound fields produced by fixed sources
2. Add capacity to simulate moving sound sources and to do acoustic footprint analysis
3. Integrate moving sound source with animal behavior model provided by Biomimetica, Inc. and provide analysis tools for dynamic simulation output.
4. Implement simulation of moving mammalian sound sources with fixed and moving receivers and provide tools for animal detection analysis
5. Add capacity for simulating single explosive sources, create and test prototype ESME data portal
6. Add capacity for simulating multiple explosive sources integrated with animal behavior model and complete fully featured ESME data portal

APPROACH

The ESME Workbench simulation system is a product of the Office of Naval Research's research program on the Effects of Sound in the Marine Environment (Gisiner et al., 2006). Many groups contributed software and were integrated into a MATLAB prototype (Shyu and Hillson, 2006). The Boston University Hearing Research Center in collaboration with Heat, Light, and Sound Research, Inc. and Biomimetica, Inc. are now in the process of building on this previous work to create a production quality simulator for marine mammal research.

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 2007		2. REPORT TYPE		3. DATES COVERED 00-00-2007 to 00-00-2007	
4. TITLE AND SUBTITLE ESME Workbench Innovations				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Boston University ,Department of Biomedical Engineering,44 Cummington St,Boston,MA,02215				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 6	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

The simulator user interface uses the GIS approach of treating different data types as layers in a geo-referenced coordinate system. The display of individual layers can be turned on and off and one layer is selected as the active layer. Depending on which layer is chosen as the active layer, additional information can be displayed, or analyses can be performed.

WORK COMPLETED

The basic ESME software architecture has been finalized and our first release of the software provides the capability to simulate and to visualize 3D sound fields produced by fixed sources. 3D sound fields are calculated by computing a series of 2D radial transects originating at the source and then interpolating the results within the cylindrical volume defined by the transects. The source and transect locations are superimposed on the bathymetry in the user console window (Figure 1). We also provide the capability to collapse the 3D field into a horizontal 2D field (footprint) by taking the maximum, minimum, or mean value in the water column for each horizontal location. The current release allows the user to import environmental parameter datasets downloaded from NAVOCEANO's GDEM-V and DBDB-V and NOAA's NGDC databases. The user can select sediment types from a generic list and can specify and save sound source parameters.

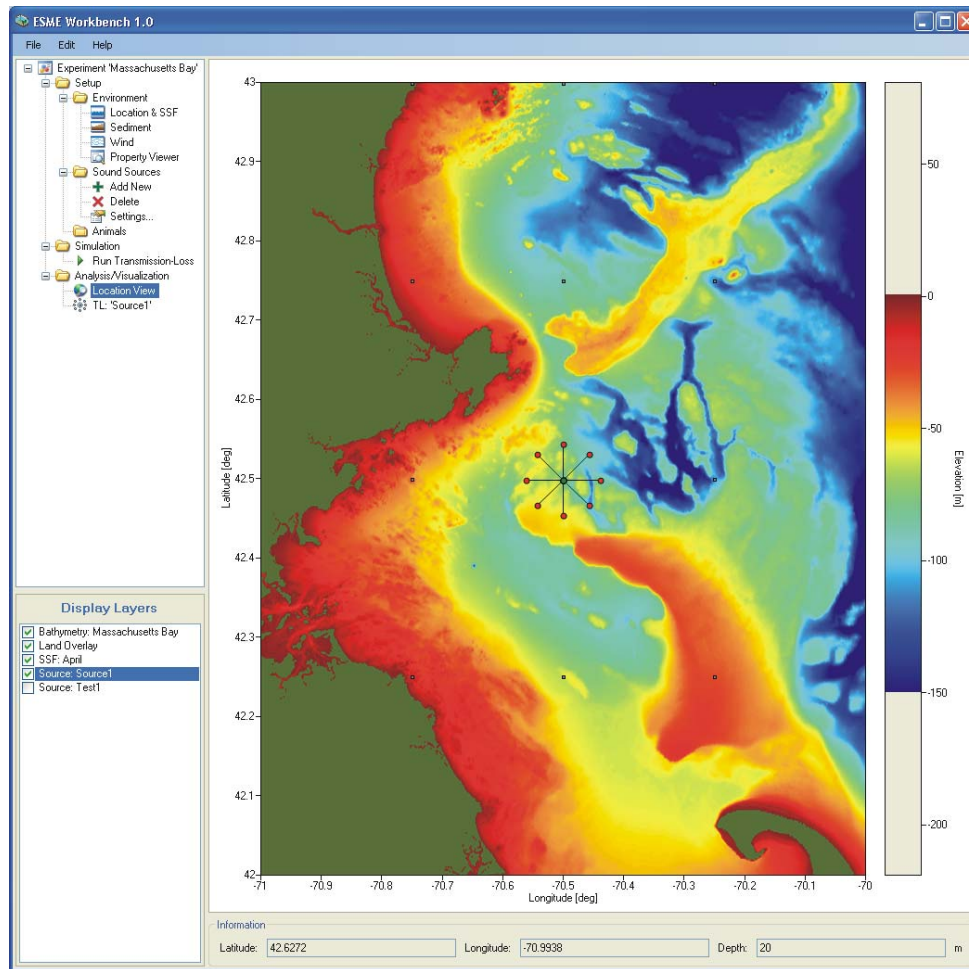


Figure 1. A typical display on the ESME user console showing Massachusetts Bay, Jefferies Ledge, and Stellwagen Bank.

We have also provided the capability to save and later reload all parameters related to a specific simulation. Tools are provided for report generation including the ability to export charts and graphs in a variety of standard graphics file formats (Figure 2) and to export transmission loss and sound field data as CSV text files.

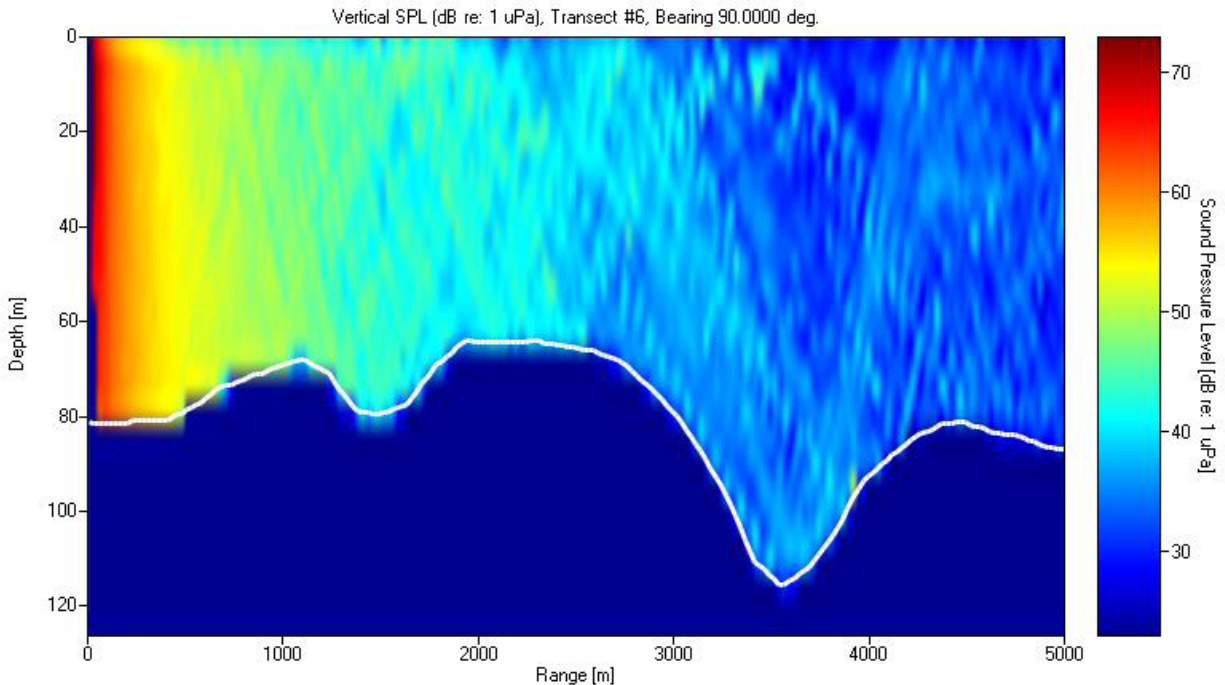


Figure 2. Vertical sound field plot produced by the ESME graphical export function

Transmission loss (TL) calculations are done using the BELLHOP ray tracing algorithm (Porter and Liu, 1994). This algorithm, which is coded in FORTRAN, combines good accuracy with fast computation times (especially when compiled with the INTEL compiler). We use a multiple thread approach for the TL calculations which allows us to make good use of the newer multicore processors.

The current release can import and display ship-track files that specify ship latitude and longitude as a function of time as well as sonar beam direction and beam width. Future releases will include additional parameters such as ping duration and duty cycle. Work is well underway for the next major release of the software. The major enhancement in the new release will be the ability to simulate animals reacting dynamically to fixed sound sources. We have integrated the animal behavior model provided by Biomimetica, Inc. into the workbench and have successfully simulated single animals reacting to single and multiple fixed sound sources. The animal position is over-plotted on the bathymetry so that the user can watch the progress of the simulation. Data logs that include the time history of animal position, behavioral state, and sound exposure level are stored as text files. Work remains to be done, however, on the user interface before the new version of the workbench will be ready for beta testing.

Because it is difficult to visualize the relationship between the simulated animals and the sound source and bathymetry, we have developed a 3D visualization system (Figure 3) using approaches pioneered

by the computer game industry. Ships and animals are rendered using readily identified icons and the sonar beam pattern is rendered as a transparent fan on the surface and as a spotlight illuminating the seafloor beneath the surface. Users can quickly pan, zoom, and fly over the animation of the simulation using simple mouse and keyboard commands (Figure 4).

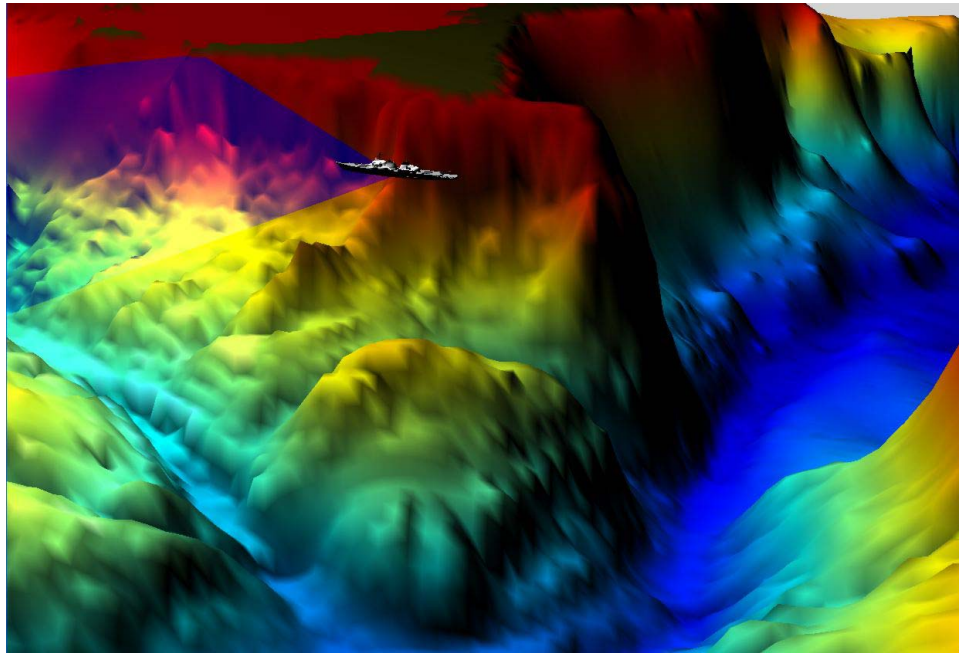


Figure 3. 3D visualization of bathymetry, ship and sonar beam

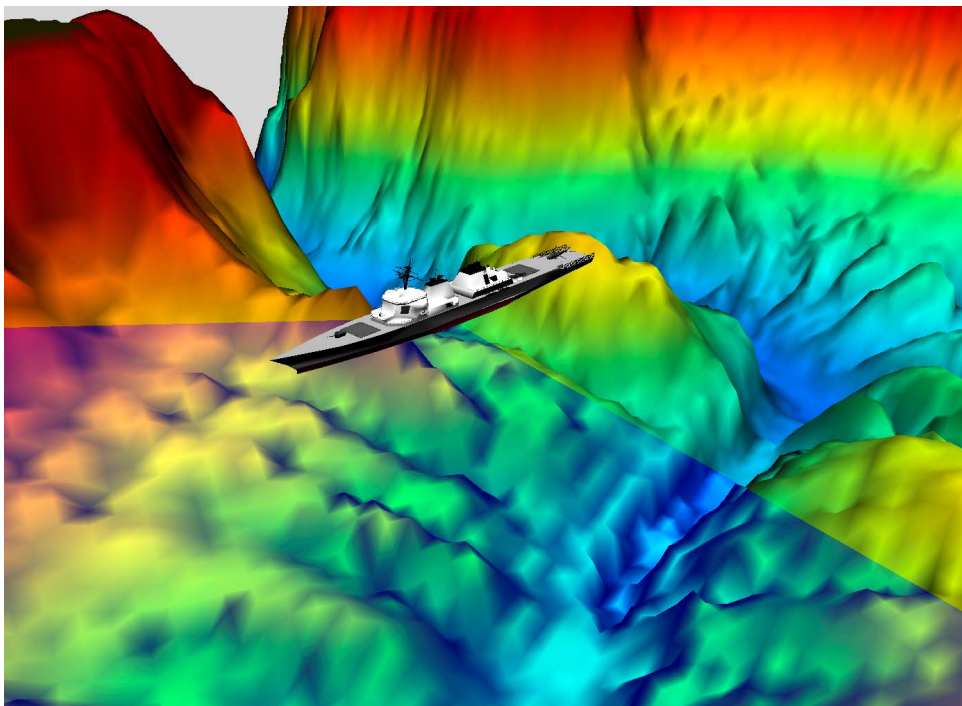


Figure 4. Zoomed in 3D view of ship and sonar beam

RESULTS

We have made significant advances in developing user interface and data visualization tools for complex acoustic simulation problems. Our test users have found the use of a graphical menu tree and the GIS graphical approach for visualizing simulation parameters very helpful. The 3D visualization of the simulated animal movements and their relationship to the location of the sound sources have turned the difficult task of interpreting 2D projections of 3D data in to an easy and intuitive task.

IMPACT/APPLICATIONS

The combination of acoustic simulations with animal behavior simulations will allow scientists and environmental planners to develop a deeper understanding of the problems associated with the impacts of anthropogenic sound sources on marine animals. In addition, the user interface tools that we are developing could be adapted for use in other complex simulation problems.

TRANSITIONS

None

RELATED PROJECTS

The project is part of a collaborative effort that includes award N0001407C0793 to Dorian Houser, Biomimetica, Inc. and award N0001407C0392 to Martin Siderius, Heat Light and Sound Research, Inc. Dorian Houser's group is supply the animal behavior modules for the workbench and Martin Siderius's group is assisting us with the acoustic propagation models.

REFERENCES

Gisiner, R.; Harper, S.; Livingston, E.; Simmen, J. (2006) Effects of sound on the marine environment (ESME): an underwater noise risk model. IEEE J. Ocean. Eng. 31: 4-7.
Porter, M. B. and Liu, Y-C. (1994) Finite-Element Ray Tracing. Theoretical and Computational Acoustics Vol 2. D. Lee and M. H. Shultz (eds). World Scientific Publishing.
Shyu, H-J. and Hillson, R. (2006). A software workbench for estimating the effects of cumulative sound exposure in marine mammals. IEEE J. Ocean. Eng. 31: 8-21.
DBDB-V <https://128.160.23.42/dbdbv/dbvquery.html>
GDEM-V <https://128.160.23.42/gdemv/gdemv.html>
NGDC <http://www.ngdc.noaa.gov/>

PUBLICATIONS

Mountain, D.C., Anderson, D., Vajda, V. and Siderius, M. Using Simulation to Design Passive Acoustic Monitoring Systems. Abstracts: 3rd International Workshop on Detection and Classification of Marine Mammals using Passive Acoustics. Boston July 24-26, 2007.

PATENTS

None

HONORS/AWARDS/PRIZES

None